REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	DRAWIN IN SW	5/21/2013	DCT

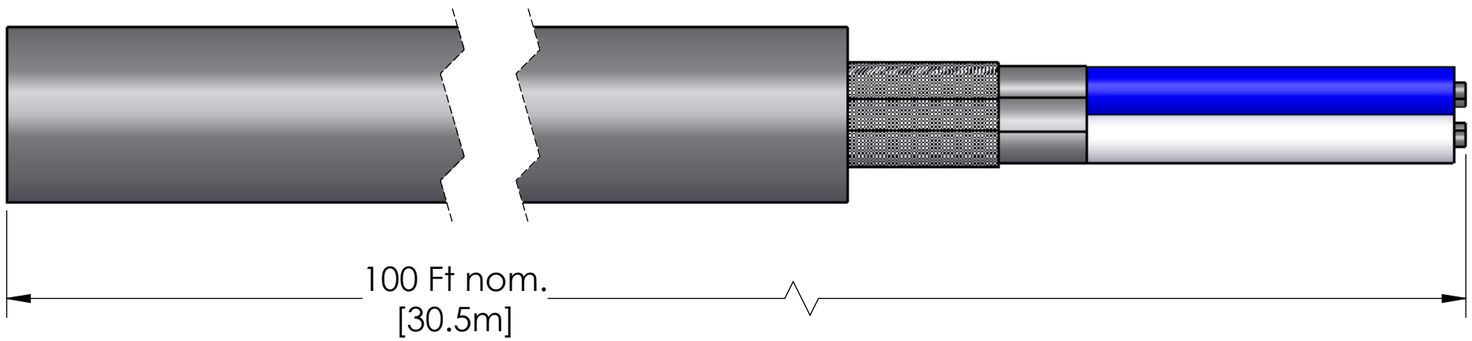

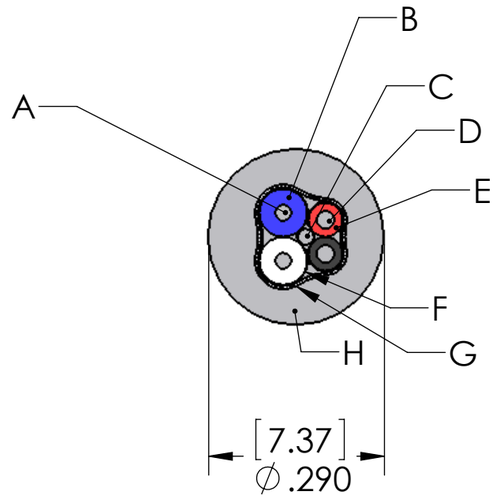

EACH CABLE IS COILED AND TIED.
BOTH ENDS ARE BLUNT CUT.

CONSTRUCTION SPECIFICATIONS:	
A	24AWG - 19X.005" TC - 0.0236 +/- .004" OD
B	26 MILS FOAMED PE INSULATION, 21 MILS MIN. AWM STYLE 10232
C	COMMON 22AWG - 19X.0058" TC STRANDED DRAIN WIRE
D	22AWG - 19X.0058" TC - .056 +/- .002 OD
E	12 MILS SEMI-RIGID PVC, 10 MILS MIN. AWM STYLE 10071
F	ALUMINUM FOIL SHIELD OVER EACH PAIR, 100% COVERAGE, FOIL OUT
G	36AWG TINNED COPPER BRAID, 65% MIN. COVERAGE
H	38 MILS PRESSURE EXTRUDED PVC, 80°C, 32 MILS MIN., GRAY

SPECIFICATIONS:	
UL STYLE:	AWM 2664
CSA STYLE:	I / II AB
CABLE JACKET MATERIAL:	Gray PVC
CABLE JACKET THICKNESS:	.032" nom.

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES AND [MM]
MATERIAL
FINISH
DO NOT SCALE DRAWING

	NAME
DRAWN	JJH
CHECKED	
ENG APPR.	
MFG APPR.	
Q.A.	
COMMENTS:	

MENCOM CORPORATION

TITLE:

SIZE	DWG. NO.	REV
B	MINDD-5CBL-C	A

SCALE: 2:1 | WEIGHT: | SHEET 1 OF 1