MALE	WIRING	FEMALE
PIN #		PIN #
1	---------	1
2	---------	2
3	---------	3

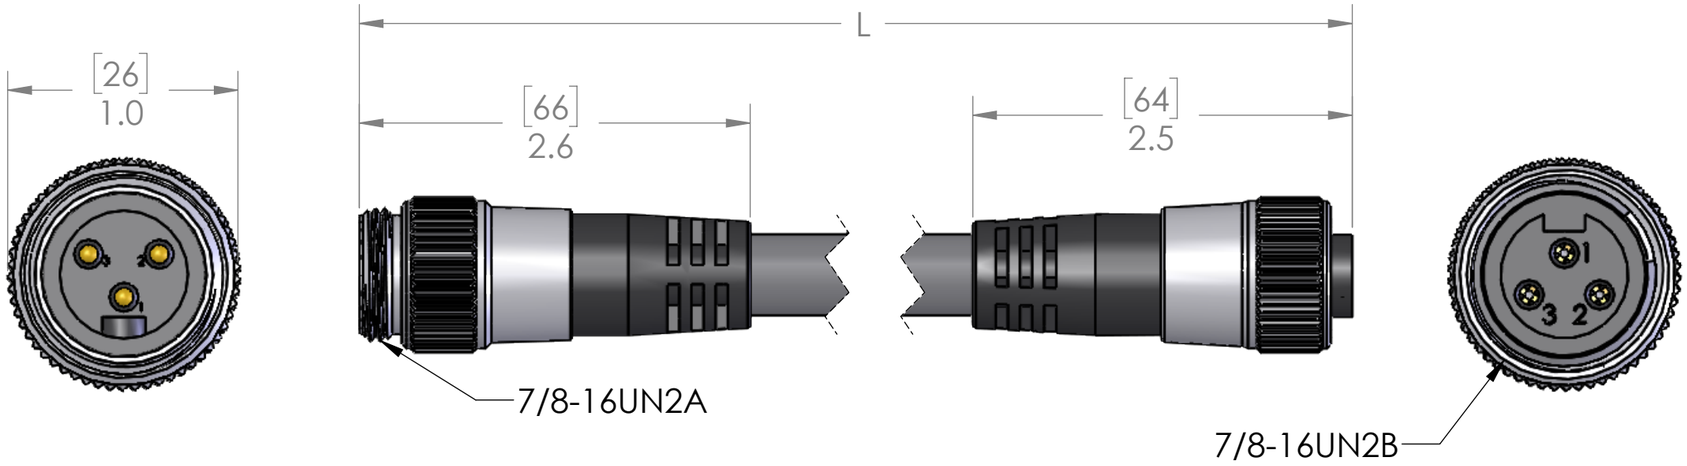

TABLE A		
P/N	L	STD?
MINH-3MFP-0.5M	20"[0.5M]	NO
MINH-3MFP-1M	40"[1M]	YES
MINH-3MFP-1.5M	59"[1.5M]	NO
MINH-3MFP-2M	79"[2M]	YES
MINH-3MFP-3M	118"[3M]	NO
MINH-3MFP-4M	157"[4M]	NO
MINH-3MFP-5M	197"[5M]	YES
MINH-3MFP-6M	236"[6M]	NO
MINH-3MFP-10M	393"[10M]	YES
MINH-3MFP-15M	591"[15M]	YES

PARTS LISTED AS NOT BEING STANDARD
MAY HAVE MINIMUM ORDER QUANTITIES

MATERIALS	
BODY:	BLACK PVC
CONTACTS:	GOLD PLATED COPPER ALLOY
CABLE:	
STYLE:	STOOW
AWG:	14 AWG
JACKET:	GRAY PVC
VOLTAGE:	600V
SHIELD:	NO
COUPLING:	NICKEL PLATED BRASS
INSERT:	YELLOW PVC
O-RING:	N/A
APPROVALS	
US:	UL LISTED
CANADA:	C-UL LISTED
ROHS:	YES
CE & UKCA:	YES
RATINGS	
PROTECTION CLASS:	UL TYPE 4 & 12, IEC IP69

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

VOLTS	600V
AMPS	18A
TEMP:	105°C

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES AND [MM]

MATERIAL

FINISH

DO NOT SCALE DRAWING

DRAWN BY	ADM
DRAWN DATE	03/11/2024
CHECKED BY	JJH
CHECK DATE	03/12/2024

COMMENTS:

MENCOM CORPORATION

TITLE:

3 POLE MALE-FEM PLUG
14AWG

SIZE	DWG. NO.	REV
B	MINH-3MFP-ZZ	C

SCALE: 1:1 | WEIGHT: | SHEET 1 OF 1