PIN #	COLOR
1	GREEN / YELLOW
2	BLACK
3	WHITE

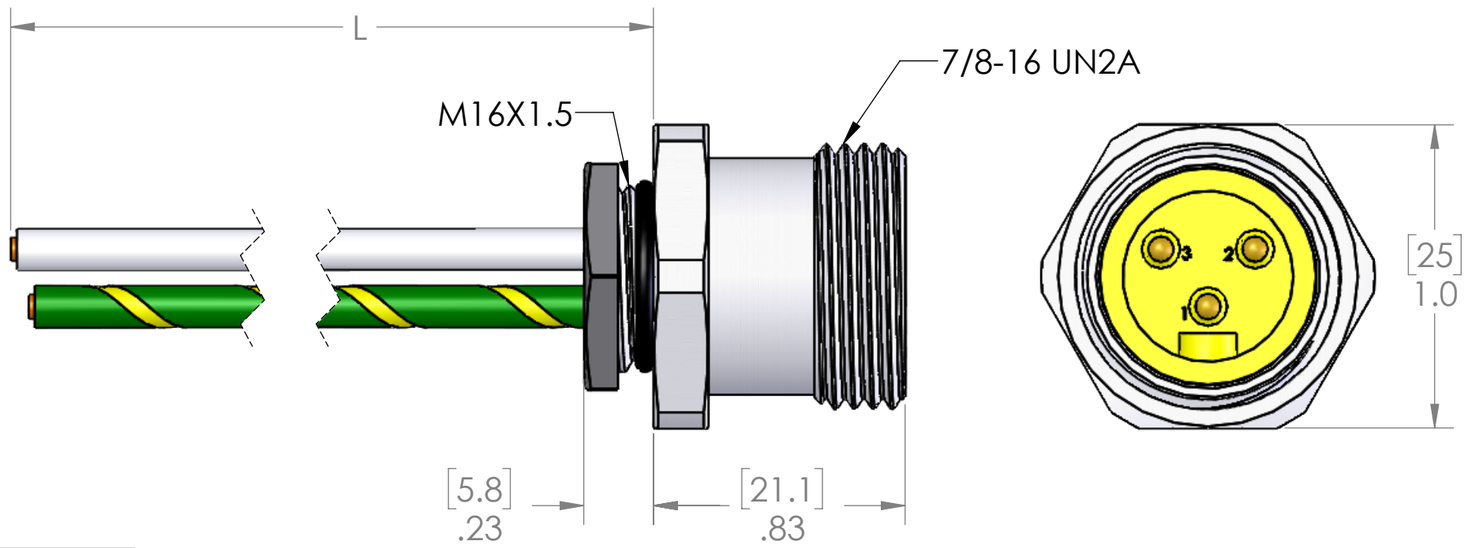

MATERIALS	
SHELL:	CLEAR ANODIZED ALUMINUM
CONTACTS:	GOLD PLATED COPPER ALLOY
WIRES:	
STYLE:	UL 1015
AWG:	14 AWG
JACKET:	PVC
VOLTAGE:	600V
INSERT:	YELLOW PVC
O-RING:	NBR
NUT:	NICKEL PLATED BRASS
APPROVALS	
US:	UL LISTED
CANADA:	C-UL LISTED
ROHS:	YES
CE & UKCA:	YES
RATINGS	
PROTECTION CLASS:	UL TYPE 4 & 12, IEC IP69

TABLE A	
P/N	L
MINH-3MR-1-M16	12" [0.3m]
MINH-3MR-0.5M-M16	20" [0.5m]
MINH-3MR-0.6M-M16	24" [0.6m]
MINH-3MR-1M-M16	40" [1m]
MINH-3MR-2M-M16	79" [2m]
MINH-3MR-3M-M16	118" [3m]
MINH-3MR-5M-M16	197" [5m]

OTHER LENGTHS ARE AVAILABLE
PLEASE CONSULT FACTORY

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

VOLTS	600V
AMPS	18A
TEMP:	105°C

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES AND [MM]
MATERIAL
FINISH
DO NOT SCALE DRAWING

DRAWN BY	RP
DRAWN DATE	03/22/2024
CHECKED BY	JJH
CHECK DATE	03/22/2024

COMMENTS:

MENCOM CORPORATION

TITLE:
3 PL MIN RECP

SIZE B | DWG. NO. MINH-3MR-ZZ-M16 | REV A

SCALE: 1:1 | WEIGHT: | SHEET 1 OF 1