PIN #	COLOR	PIN #	COLOR
1	VIOLET	11	BLACK
2	RED	12	GRN / YEL
3	GRAY	13	YELLOW w/BRWN
4	RED w/BLUE	14	BROWN w/GRN
5	BLUE	15	WHITE
6	GREEN	16	YELLOW
7	BROWN	17	PINK
8	WHITE w/GRN	18	GRAY w/BRWN
9	WHITE w/YEL	19	GRAY w/PINK
10	WHITE w/GRY		

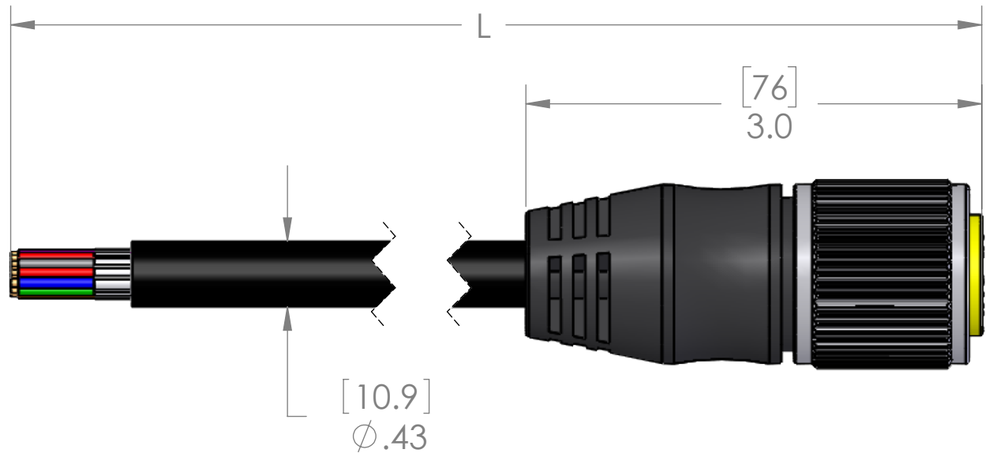

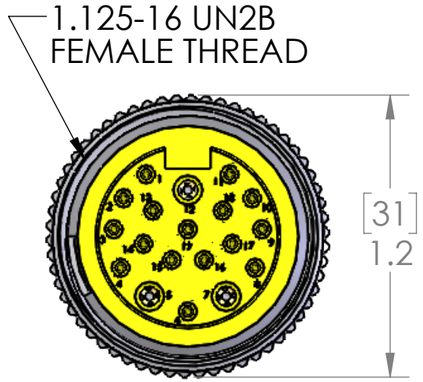

P/N	L	STD?
MINP-19FP-3	36" [0.9m]	YES
MINP-19FP-6	72" [1.8m]	YES
MINP-19FP-12	144" [3.7m]	YES
MINP-19FP-15	180" [4.6m]	NO
MINP-19FP-20	240" [6.1m]	YES
MINP-19FP-30	360" [9.1m]	YES
MINP-19FP-40	480" [12.2m]	NO
MINP-19FP-50	600" [15.2m]	NO
MINP-19FP-60	720" [18.3m]	NO
MINP-19FP-100	1200" [30.5m]	NO

PARTS LISTED AS NOT BEING STANDARD MAY HAVE MINIMUM ORDER QUANTITIES

MATERIALS	
BODY:	BLACK PUR
CONTACTS:	GOLD PLATED COPPER ALLOY
CABLE:	
STYLE:	AWG
AWG:	18 & 22 AWG
JACKET:	BLACK PUR
VOLTAGE:	300V
SHIELD:	MYLAR W/DRAIN
COUPLING:	NICKEL PLATED BRASS
INSERT:	YELLOW PVC
O-RING:	N/A
APPROVALS	
US:	UL LISTED
CANADA:	C-UL LISTED
ROHS:	YES
CE & UKCA:	YES
RATINGS	
PROTECTION CLASS:	UL TYPE 4 & 12, IEC IP69

Please note that to better serve the varying needs of our customers, these parts have been UL tested for two different amperage ratings as shown by our Ratings table.

RATINGS:	
PIN 12	GROUND
PINS 5 & 7	300V, 6A
ALL OTHERS	300V, 1A
OR	
PIN 12	GROUND
PINS 5 & 7	300V, 4A
ALL OTHERS	300V, 2A
VOLTS	300V
AMPS	6A/1A OR 4A/2A
TEMP:	80°C

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:	
DIMENSIONS ARE IN INCHES AND [MM]	
MATERIAL	
FINISH	
DO NOT SCALE DRAWING	

DRAWN BY	ADM
DRAWN DATE	02/29/2024
CHECKED BY	JJH
CHECK DATE	03/01/2024
COMMENTS:	

MENCOM CORPORATION

TITLE:

SIZE	DWG. NO.	REV
B	MINP-19FP-ZZ	D
SCALE: 1:1	WEIGHT:	SHEET 1 OF 1