


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	RELEASED	7/16/2013	

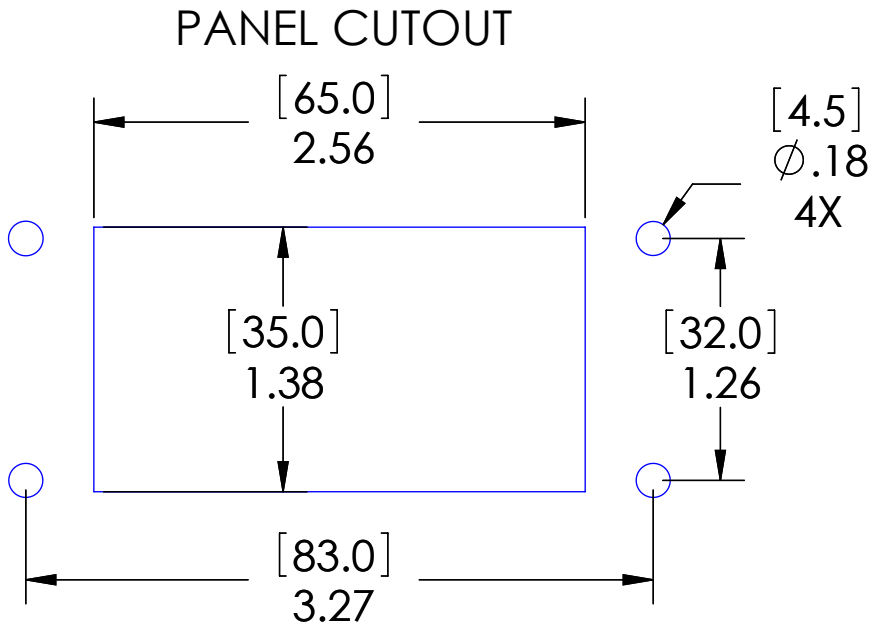

HOUSING MATERIALS	
BODY:	EPOXY COATED DIE CAST ALUMINUM
GASKET:	THERMOPLASTIC ELASTOMER
HANDLE:	POLYAMIDE
LEVERS:	STAINLESS STEEL
INSERTS:	GLASS REINFORCED THERMOPLASTIC
CONTACTS:	SILVER PLATED COPPER ALLOY

Certifications (under individual component part numbers):	
US:	UL Recognized
Canada:	C-UL Recognized

Environmental Ratings:	
NEMA / UL:	4, 4X, 12

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

Recommended cable glands for M25x1.5 opening:
Metal (nickel plated brass): MCG-M25 (for 8 - 16mm dia. cables)
Plastic (gray polyamide): PCGU-M25 (for 8 - 16mm dia. cables)

		UNLESS OTHERWISE SPECIFIED:		NAME	MENCOM CORPORATION					
		DIMENSIONS ARE IN INCHES AND [MM]	DRAWN	BEM				TITLE:		
			CHECKED							
			ENG APPR.							
			MFG APPR.							
			Q.A.							
			COMMENTS:		SIZE B			DWG. NO.		REV
		MATERIAL						MNDS-10IO25		A
		FINISH								
		DO NOT SCALE DRAWING			SCALE: 1:1		WEIGHT:		SHEET 1 OF 1	