

8

7

6

5

4



3

2

1

Recommended cable gland for M25 opening (ordered separately):
Plastic (gray polyamide): PCGU-M25 (for 8 - 17mm dia. cables)
Metal (Nickel Plated Brass): MCG-M25 (for 8 - 16mm dia. cables)

Revisions			
REV.	DESCRIPTION	DATE	DRAWN BY
A	RELEASED	11/16/2020	DCG

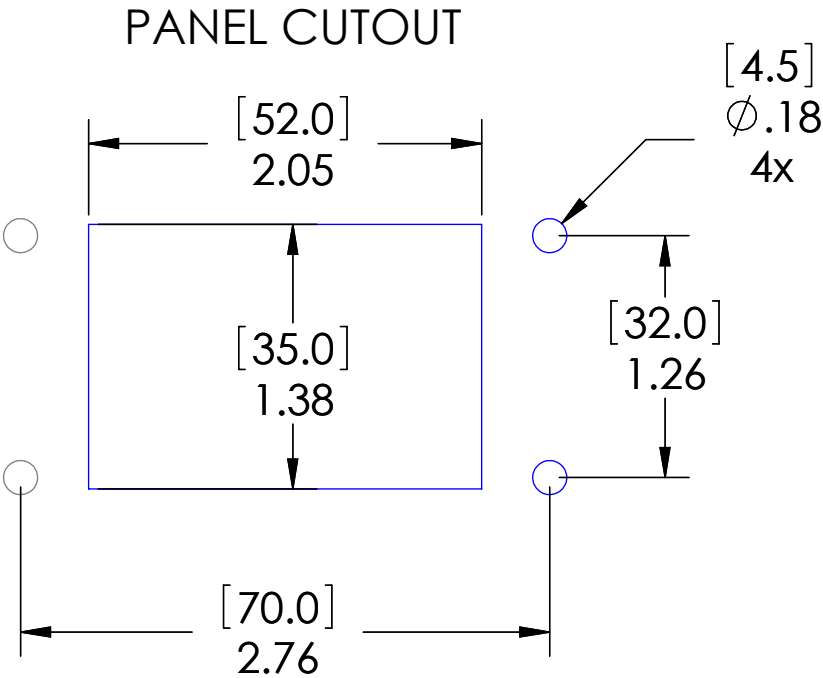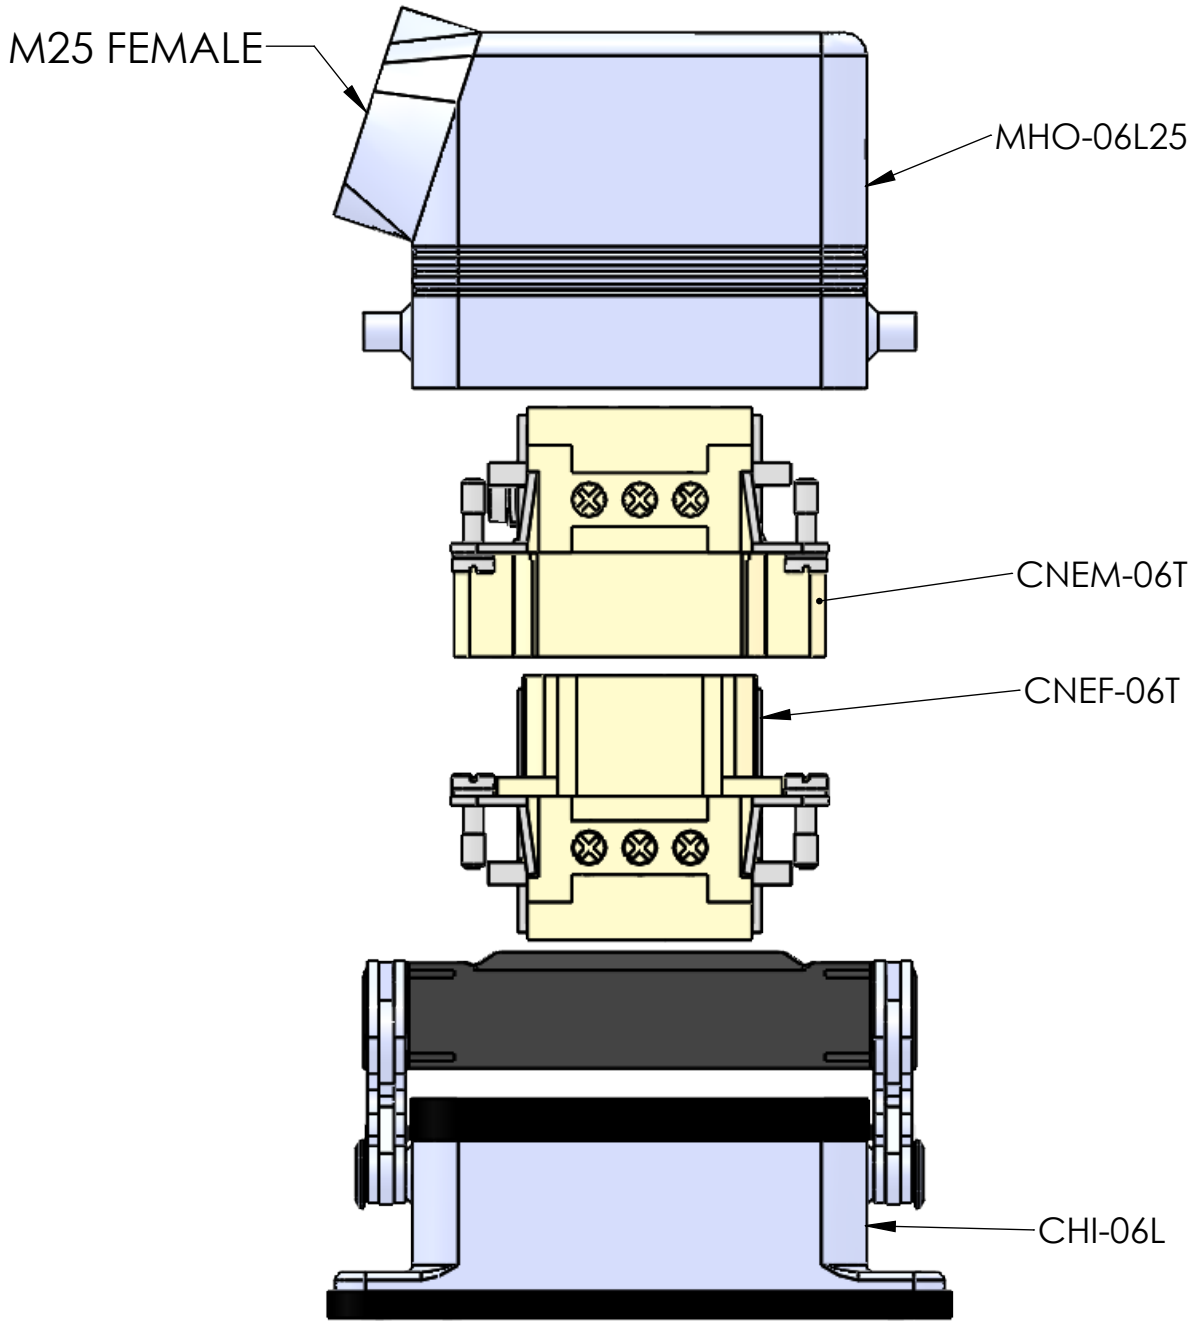

Certifications	
(under individual component part numbers)	
US:	UL Recognized
Canada:	C-UL Recognized
Europe:	CE

Environmental Ratings:

NEMA / UL: 4, 4X, 12

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
AND [MM]

MATERIAL

FINISH

DO NOT SCALE DRAWING

MATERIALS	
BODY:	EPOXY COATED DIE CAST ALUMINUM
GASKET:	THERMOPLASTIC ELASTOMER
HANDLE:	POLYAMIDE
LEVERS:	STAINLESS STEEL
INSERTS:	GLASS REINFORCED THERMOPLASTIC
CONTACTS:	SILVER PLATED COPPER ALLOY

DRAWN BY	DCG
DRAWN DATE	11/17/2020
CHECKED BY	ADM
CHECK DATE	11/17/2020

COMMENTS:

MENCOM CORPORATION

TITLE:

ILME KIT

SIZE

B

DWG. NO.

MNLS-06IO25

REV

A

SCALE: 1:1

WEIGHT:

SHEET 1 OF 1

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.