
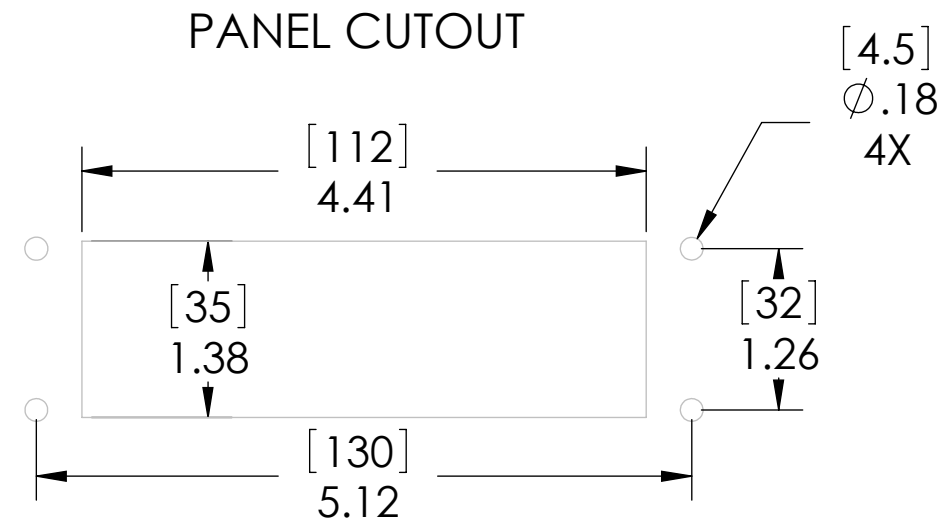


Recommended cable gland for M32 opening (ordered separately):
Plastic (gray polyamide): PCGU-M32 (for 12 - 21mm dia. cables)
Metal (Nickel Plated Brass): MCG-M32 (for 12 - 21mm dia. cables)

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	DRAWN IN SW	3/13/2014	JJH

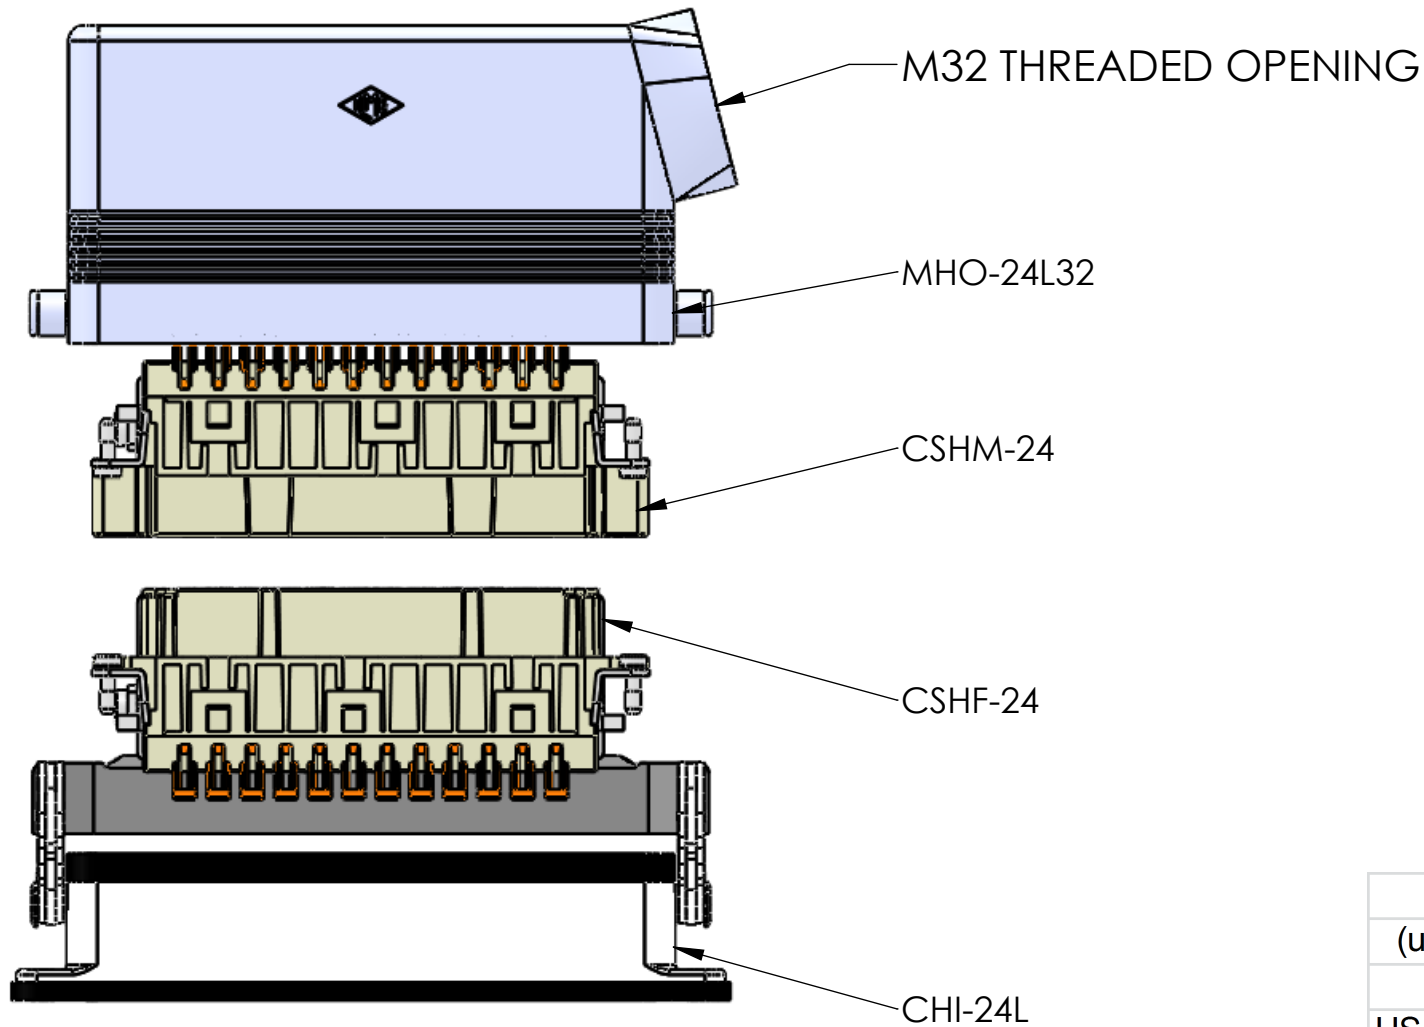

Certifications	
(under individual component part numbers)	
US:	UL Recognized
Canada:	C-UL Recognized
Europe:	CE
China:	CCC

MATERIALS	
BODY:	EPOXY COATED DIE CAST ALUMINUM
GASKET:	THERMOPLASTIC ELASTOMER
HANDLE:	POLYAMIDE
LEVERS:	STAINLESS STEEL
INSERTS:	GLASS REINFORCED THERMOPLASTIC
CONTACTS:	SILVER PLATED COPPER ALLOY

Environmental Ratings:	
NEMA / UL:	4, 4X, 12

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

UNLESS OTHERWISE SPECIFIED:	
DIMENSIONS ARE IN INCHES AND [MM]	
MATERIAL	
FINISH	
DO NOT SCALE DRAWING	

NAME		MENCOM CORPORATION	
RSC		TITLE:	
DRAWN		24PL M-F INS 1 LV BS M32 RA HD	
CHECKED		SIZE	
ENG APPR.		DWG. NO.	
MFG APPR.		REV	
Q.A.		A	
COMMENTS:		SCALE: 2:3	
		WEIGHT:	
		SHEET 1 OF 1	