



Recommended cable gland for M32 opening (ordered separately):
Plastic (gray polyamide): PCGU-M32 (for 12 - 21mm dia. cables)
Metal (Nickel Plated Brass): MCG-M32 (for 12 - 21mm dia. cables)

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	DRAWN IN SW	3/29/2016	DCG

M32x1.5 THREADED OPENING

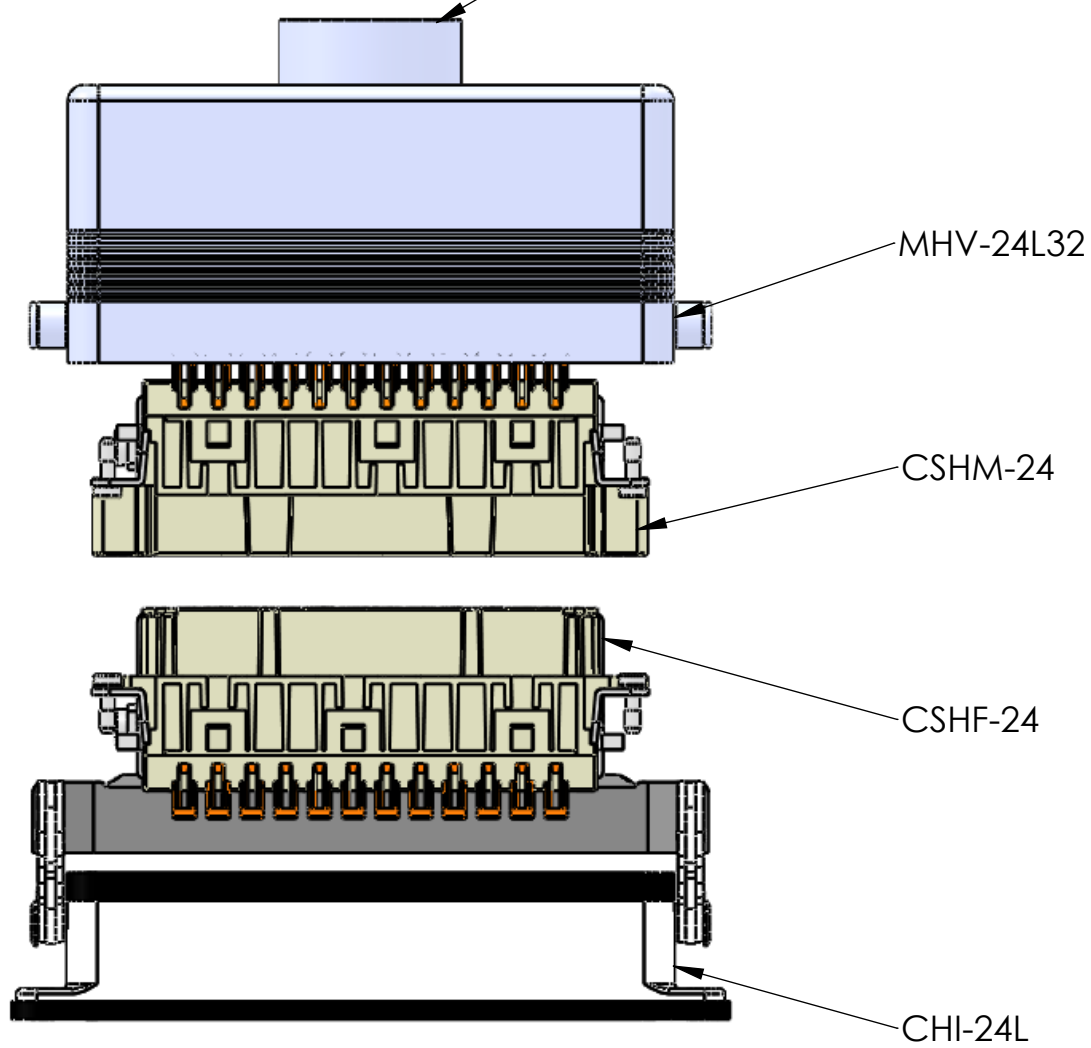

PANEL CUTOUT

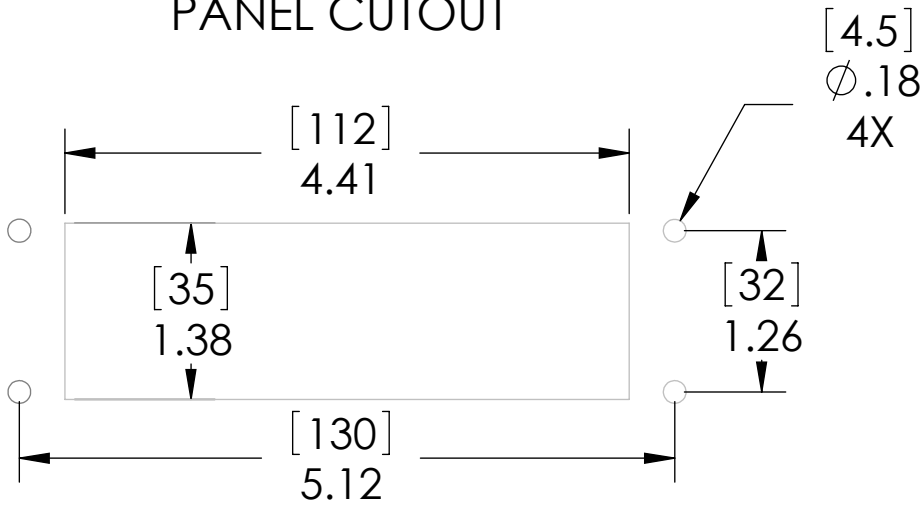

Certifications

(under individual component part numbers)

US:	UL Recognized
Canada:	C-UL Recognized
Europe:	CE
China:	CCC

MATERIALS

BODY:	EPOXY COATED DIE CAST ALUMINUM
GASKET:	THERMOPLASTIC ELASTOMER
HANDLE:	POLYAMIDE
LEVERS:	STAINLESS STEEL
INSERTS:	GLASS REINFORCED THERMOPLASTIC
CONTACTS:	SILVER PLATED COPPER ALLOY

Environmental Ratings:

NEMA / UL: 4, 4X, 12

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES
AND [MM]

MATERIAL

FINISH

DO NOT SCALE DRAWING

	NAME
DRAWN	BEM
CHECKED	
ENG APPR.	
MFG APPR.	
Q.A.	
COMMENTS:	

MENCOM CORPORATION

TITLE:

24PL M-F INS 1 LV BS M32 HD

SIZE	DWG. NO.	REV
B	MQLS-24IV32	A

SCALE: 2:3 WEIGHT: SHEET 1 OF 1