


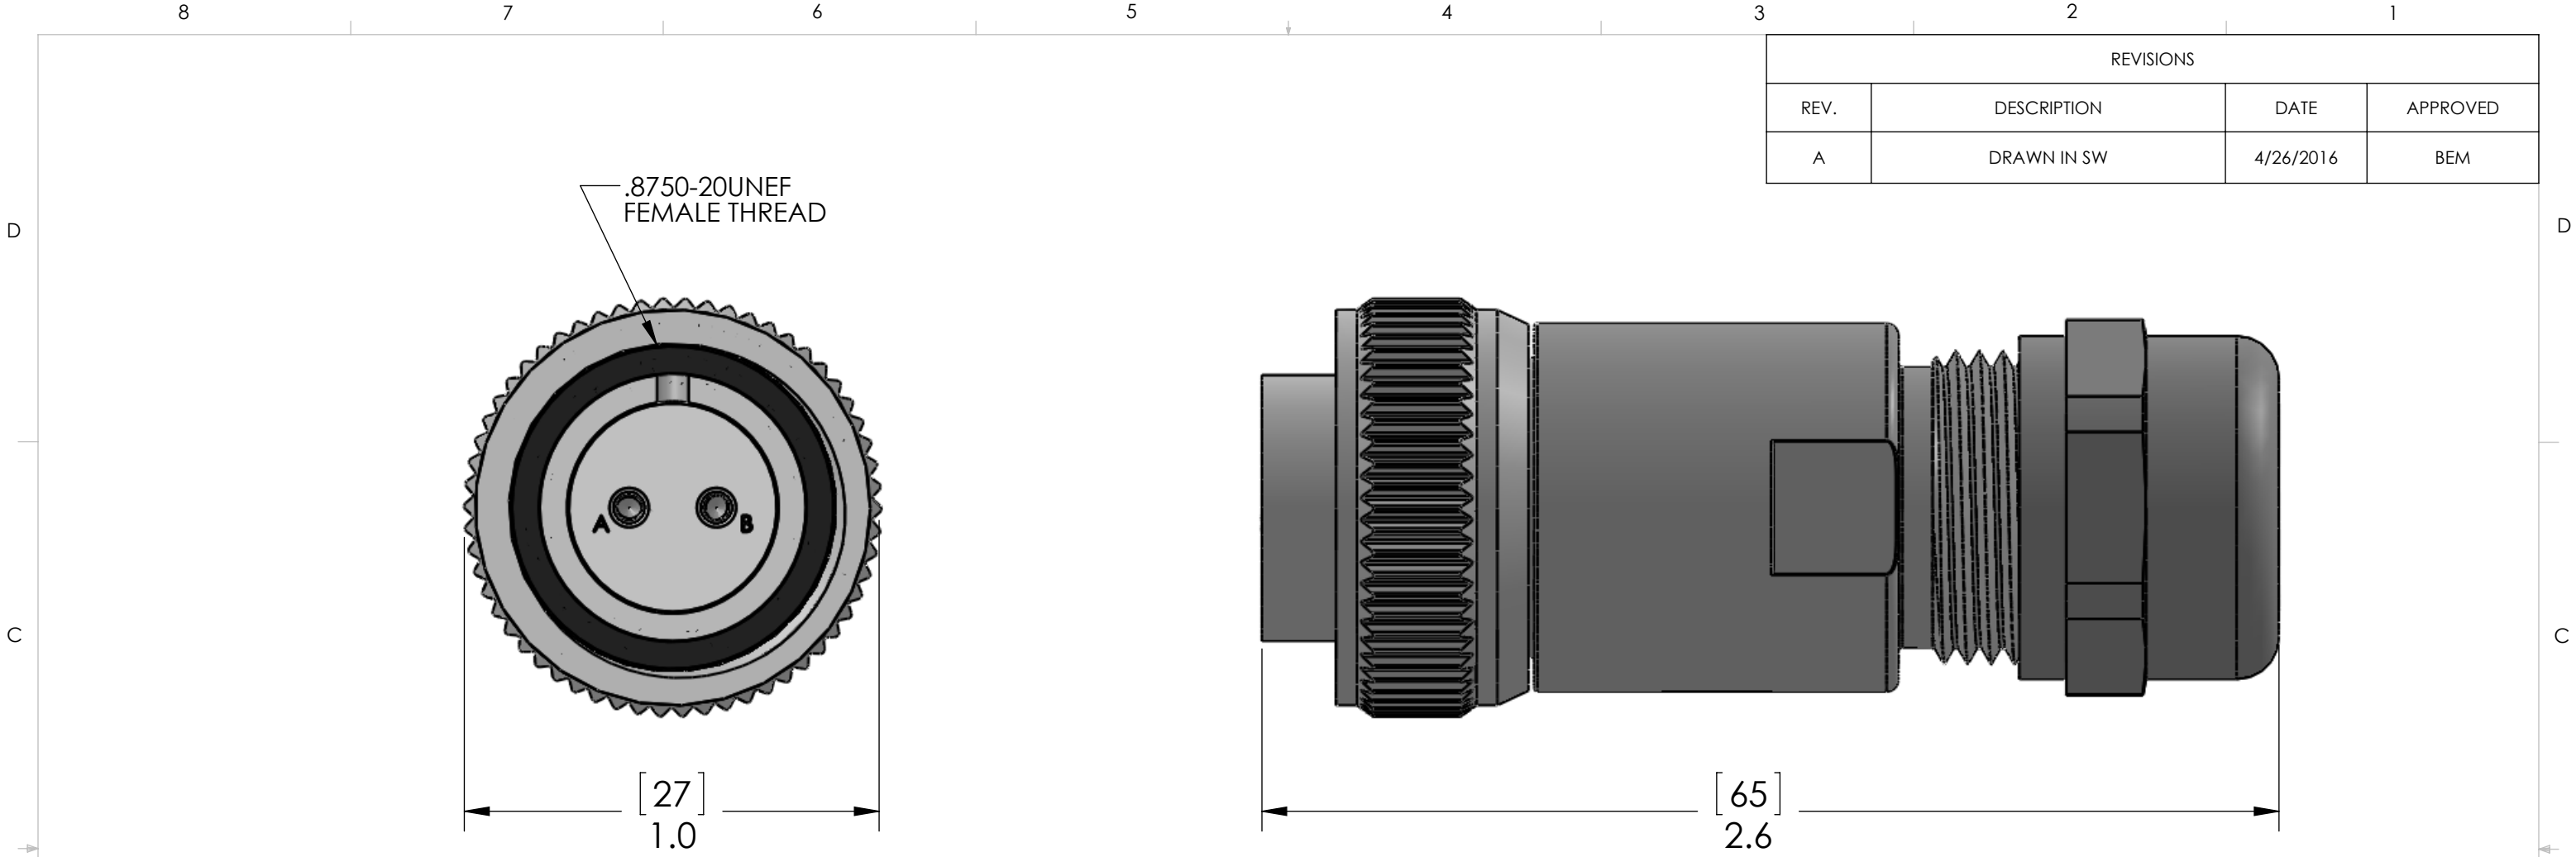

MATERIALS	
BODY:	NICKEL PLATED BRASS
CONTACTS:	SILVER PLATED COPPER ALLOY
CABLE SEAL:	NBR
INSERT:	PBT
COUPLING:	NICKEL PLATED BRASS
RATINGS	
AMPS:	16AWG - 8A max 18AWG - 5.5A max 20-22AWG - 4A max
VOLTS:	600V MAX
SEAL:	IP67
CABLE RANGE:	16AWG - 22AWG 0.232" - 0.472" (6mm - 12mm) OD
TEMPERATURE:	105°C

Voltage rating is 600V or the rating of the cable, whichever is less.

Connections made via solder terminals.

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:		NAME	MENCOM CORPORATION	
DIMENSIONS ARE IN INCHES AND [MM]	DRAWN	JJH	TITLE:	
	CHECKED		2 PL SIZE 14 FEMALE PLUG	
	ENG APPR.			
	MFG APPR.			
MATERIAL	Q.A.			
	COMMENTS:			
FINISH			SIZE	DWG. NO.
DO NOT SCALE DRAWING			B	MS14S-2FP-FW20-SC
			SCALE: 2.5:1	WEIGHT:
			SHEET 1 OF 1	

REV
A