
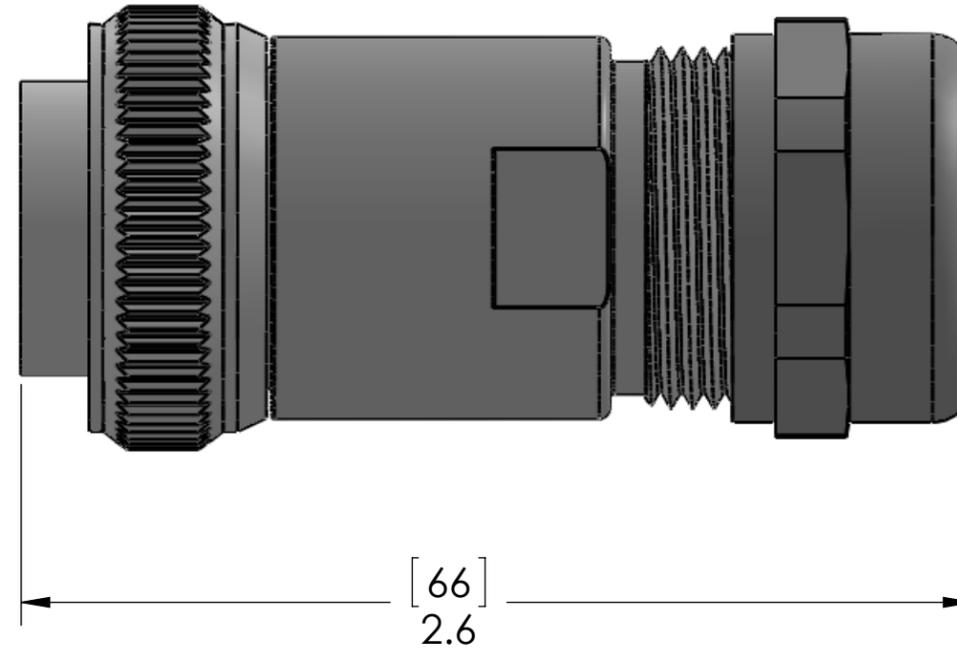


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	DRAWN IN SW	4/26/2016	

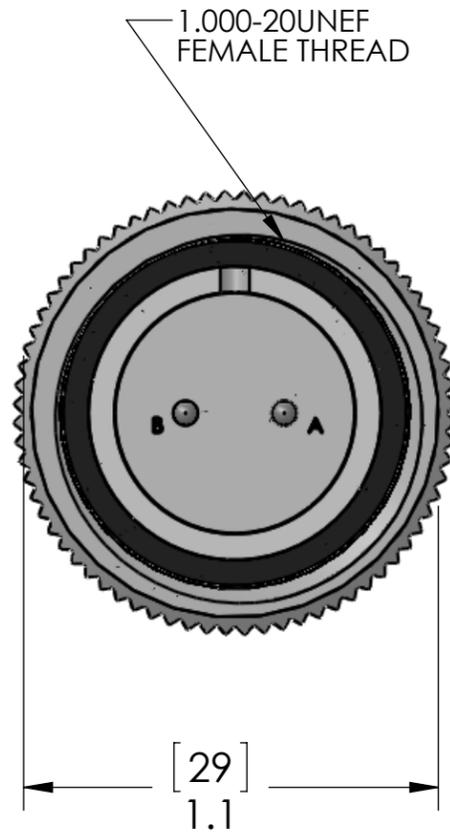

MATERIALS	
BODY:	NICKEL PLATED BRASS
CONTACTS:	SILVER PLATED COPPER ALLOY
CABLE SEAL:	NBR
INSERT:	PBT
COUPLING:	NICKEL PLATED BRASS
RATINGS	
AMPS:	16AWG - 8A max 18AWG - 5.5A max 20-22AWG - 4A max
VOLTS:	600V MAX
SEAL:	IP67
CABLE RANGE:	16AWG - 22AWG 0.31" - 0.67" (8mm - 17mm) OD
TEMPERATURE:	105°C

Voltage rating is 600V or the rating of the cable, whichever is less.

Connections made via solder terminals.

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MM]	NAME	MENCOM CORPORATION	
	DRAWN	JJH	TITLE:
	CHECKED		2 PL SZ 16 MALE PLUG
	ENG APPR.		SIZE
	MFG APPR.		DWG. NO.
	Q.A.		REV
	COMMENTS:		B MS16S-2MP-FW25-SC A
MATERIAL		SCALE: 2.5:1	WEIGHT:
FINISH		SHEET 1 OF 1	
DO NOT SCALE DRAWING			

8 7 6 5 4 3 2 1

D

D

C

C

B

B

A

A

8 7 6 5 4 3 2 1