
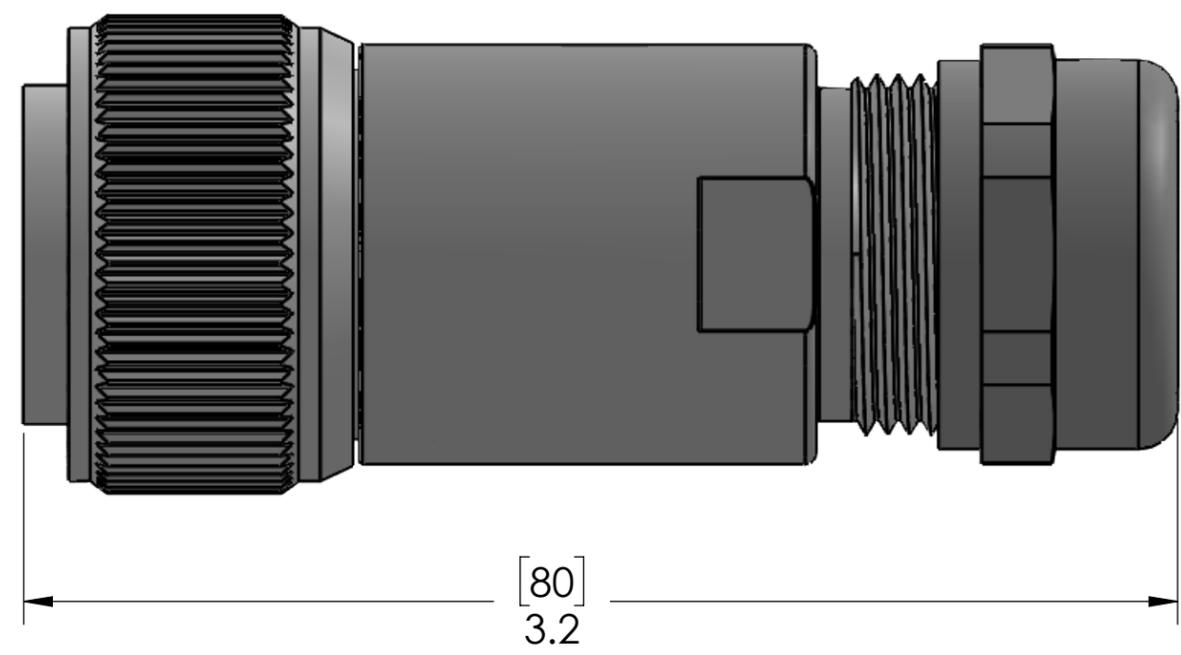


D  
C  
B  
A

D  
C  
B  
A

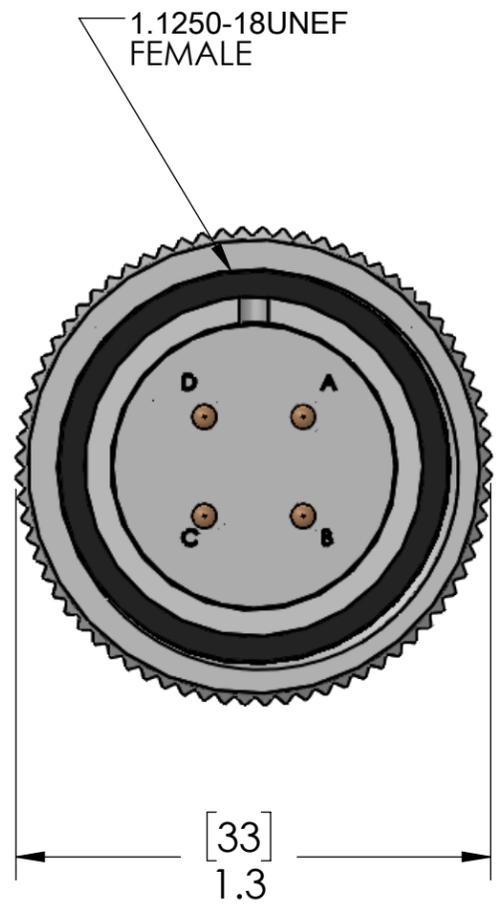

Voltage rating is 600V or the rating of the cable, whichever is less.

Connections made via solder terminals.

MATERIALS	
BODY:	NICKEL PLATED BRASS
CONTACTS:	SILVER PLATED COPPER ALLOY
CABLE SEAL:	NBR
INSERT:	PBT
COUPLING:	NICKEL PLATED BRASS
RATINGS	
AMPS:	16AWG - 8A max 18AWG - 5.5A max 20-22AWG - 4A max
VOLTS:	600V MAX
SEAL:	IP67
CABLE RANGE:	16AWG - 22AWG 0.31" - 0.67" (8mm - 17mm) OD
TEMPERATURE:	105C

**PROPRIETARY AND CONFIDENTIAL**  
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MM]	DRAWN BY	JJH
	DRAWN DATE	08/30/2019
	CHECKED BY	ADM
	CHECK DATE	08/30/2019
COMMENTS:		
MATERIAL		
FINISH		
DO NOT SCALE DRAWING		

<b>MENCOM CORPORATION</b>		
TITLE:		
SIZE	DWG. NO.	REV
<b>B</b>	MS18-4MP-FW25-SC	<b>A</b>
SCALE: 2:1	WEIGHT:	SHEET 1 OF 1