
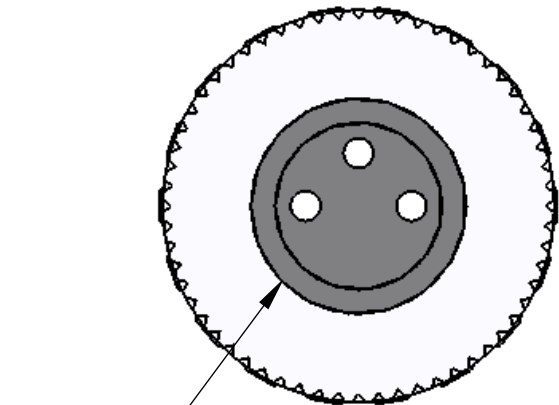


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	6/18/2010	bem

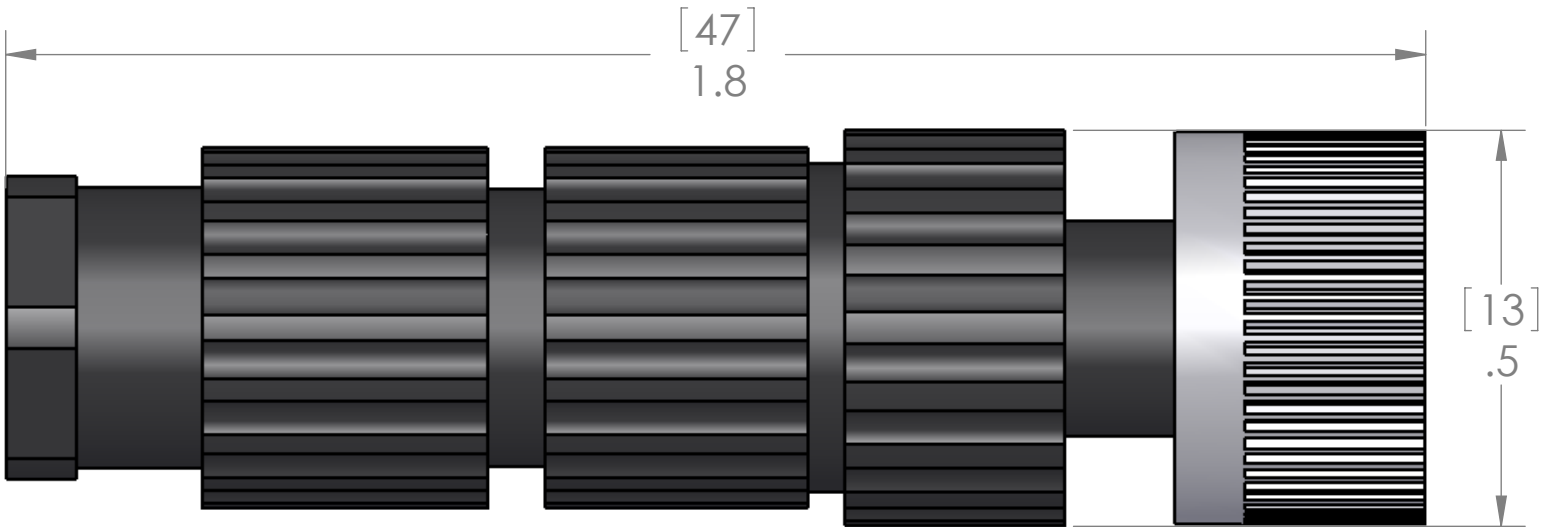

CONNECTION MADE VIA AXIAL PIERCING
OF WIRES. NO STRIPPING OF WIRES IS
NECESSARY.
WIRE O.D. RANGE 1.0MM - 1.55MM

RATINGS:	
SEAL:	
WIRE RANGE:	
CONTACT RESISTANCE:	
MATERIALS	
BODY:	OIL RESISTANT BLACK PVC
CONTACTS:	GOLD PLATED COPPER ALLOY
COUPLING:	NICKEL PLATED ZINC DIECAST
INSERT:	POLYAMIDE

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

VOLTS	60V
AMPS	4A
TEMP	90°C

SPECIFICATIONSDO NOT SCALE DRAWING

UNLESS OTHERWISE SPECIFIED:		NAME
DIMENSIONS ARE IN INCHES & [MM]	DRAWN	BEM
	CHECKED	
	ENG APPR.	
	MFG APPR.	
	Q.A.	
MATERIAL	COMMENTS:	
FINISH		
DO NOT SCALE DRAWING		

MENCOM CORPORATION		
TITLE:		
SIZE	DWG. NO.	REV
B	NAN-T-3FP-FW	A
SCALE: 4:1	WEIGHT:	SHEET 1 OF 1