MALE	WIRING	FEMALE
1	----------	1
4	----------	4
3	----------	3

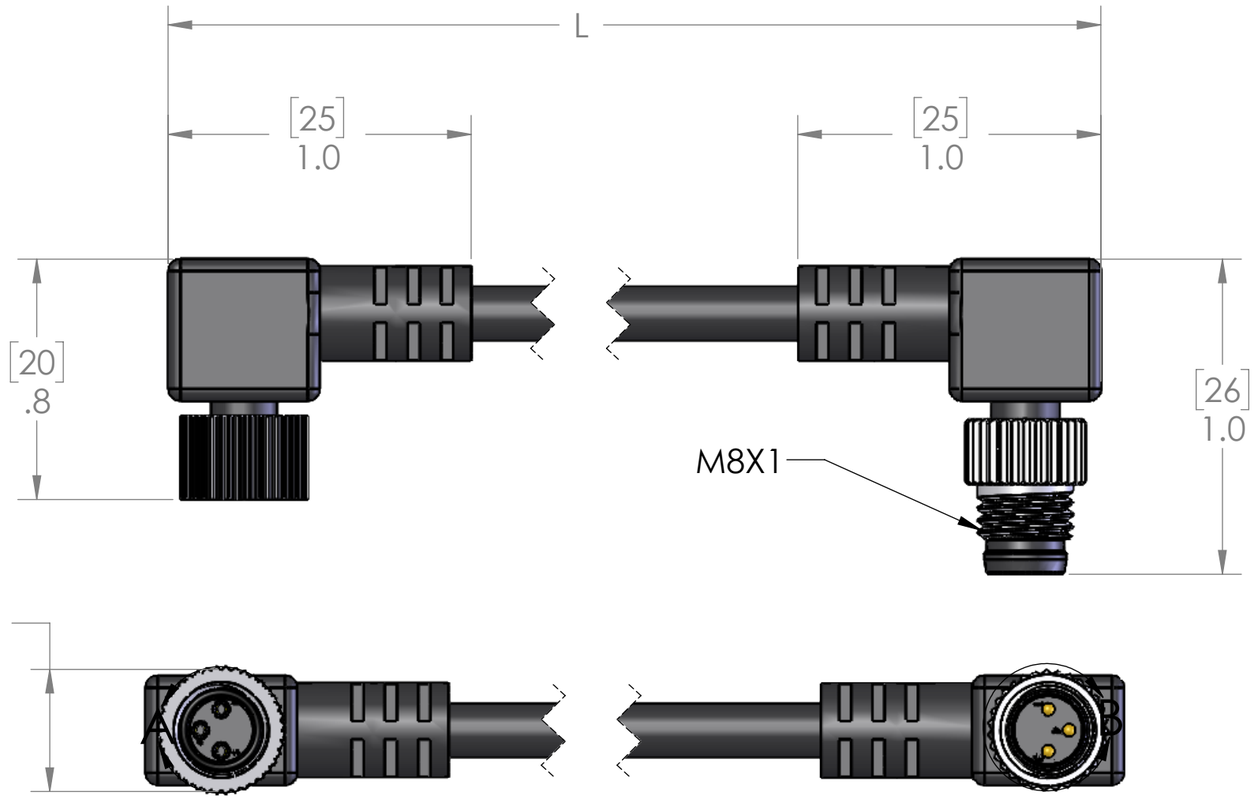

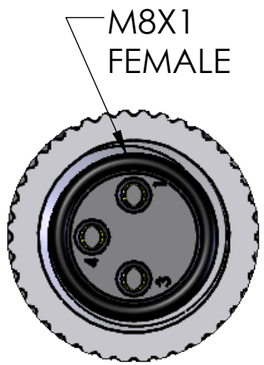

DETAIL A
SCALE 4 : 1

DETAIL B
SCALE 4 : 1

TABLE A		
P/N	L	STD?
NAN-T-3MFP-0.5M-R	19"[.5M]	NO
NAN-T-3MFP-1M-R	40"[1M]	NO
NAN-T-3MFP-2M-R	79"[2M]	YES
NAN-T-3MFP-3M-R	118"[3M]	NO
NAN-T-3MFP-4M-R	157"[4M]	NO
NAN-T-3MFP-5M-R	197"[5M]	YES
NAN-T-3MFP-6M-R	236"[6M]	NO
NAN-T-3MFP-8M-R	315"[8M]	NO
NAN-T-3MFP-10M-R	393"[10M]	YES

PARTS LISTED AS NOT BEING STANDARD
MAY HAVE MINIMUM ORDER QUANTITIES

MATERIALS	
BODY:	BLACK PVC
CONTACTS:	GOLD PLATED COPPER ALLOY
CABLE:	
STYLE:	AWM
AWG:	22 AWG
JACKET:	BLACK PVC
VOLTAGE:	300V
SHIELD:	NO
COUPLING:	NICKEL PLATED BRASS
INSERT:	POLYAMIDE
O-RING:	NBR
RATINGS	
PROTECTION CLASS:	IEC IP67

VOLTS	60V
AMPS	3A
TEMP:	70°C

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES AND [MM]

MATERIAL

FINISH

DO NOT SCALE DRAWING

DRAWN BY	JJH
DRAWN DATE	01/24/2024
CHECKED BY	RP
CHECK DATE	01/24/2024

COMMENTS:

MENCOM CORPORATION

TITLE:

SIZE	DWG. NO.	REV
B	NAN-T-3MFP-ZZ-R	B
SCALE: 2:1	WEIGHT:	SHEET 1 OF 1