REVISIONS		
REV.	DESCRIPTION	DATE
A	REDRAWN IN SW	8/26/2005

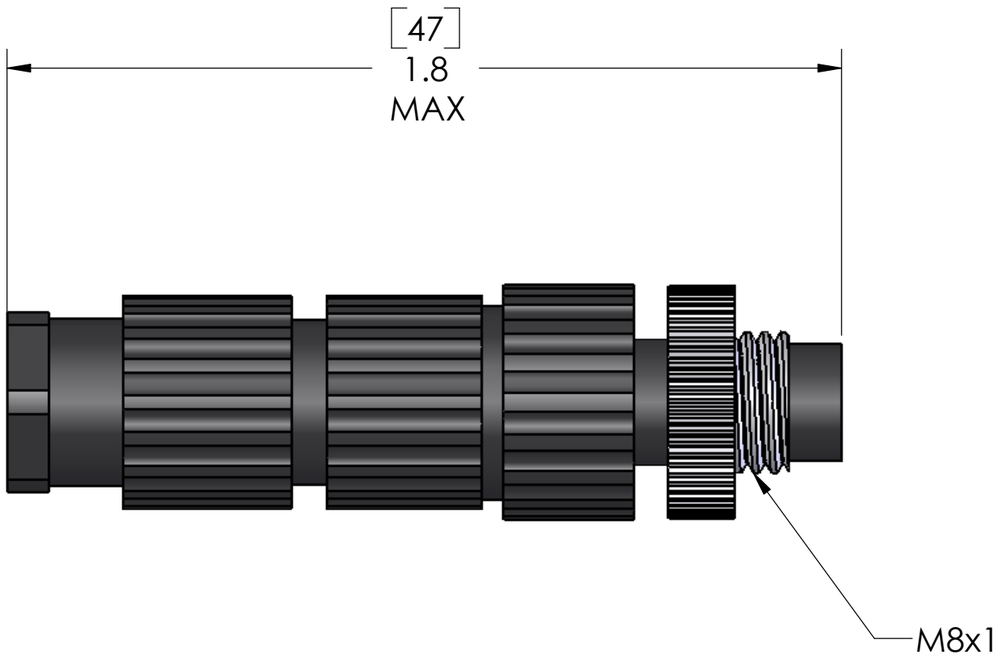

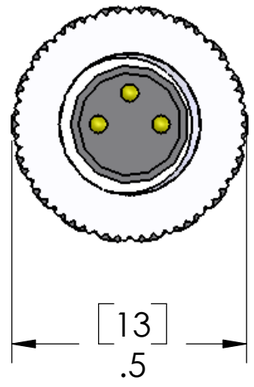

CONNECTOR MATERIALS:	
BODY:	POLYAMIDE
SEALS:	NBR
CONTACTS:	GOLD PLATED COPPER ALLOY
COUPLING:	NICKEL PLATED ZINC ALLOY

CONNECTION MADE VIA AXIAL PIERCING OF WIRES. NO STRIPPING OF WIRES IS NECESSARY.

RATINGS:	
SEAL:	IP67
WIRE RANGE:	0.25 - .034 sqmm
CONTACT RESISTANCE:	6 Ohms max

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

VOLTS	60V
AMPS	4A
TEMP	90°C

SPECIFICATIONS

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
MATERIAL
FINISH
DO NOT SCALE DRAWING

	NAME
DRAWN	BEM
CHECKED	
ENG APPR.	
MFG APPR.	
Q.A.	

COMMENTS:

MENCOM CORPORATION

TITLE:

SIZE	DWG. NO.	REV
B	NAN-T-3MP-FW	A

SCALE: 3:1 | WEIGHT: | SHEET 1 OF 1