

MDC	WIRING	NAN
PIN #		PIN #
1	-----	1
3	-----	3
4	-----	4

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	REDRAWN IN SW	2/9/2005	

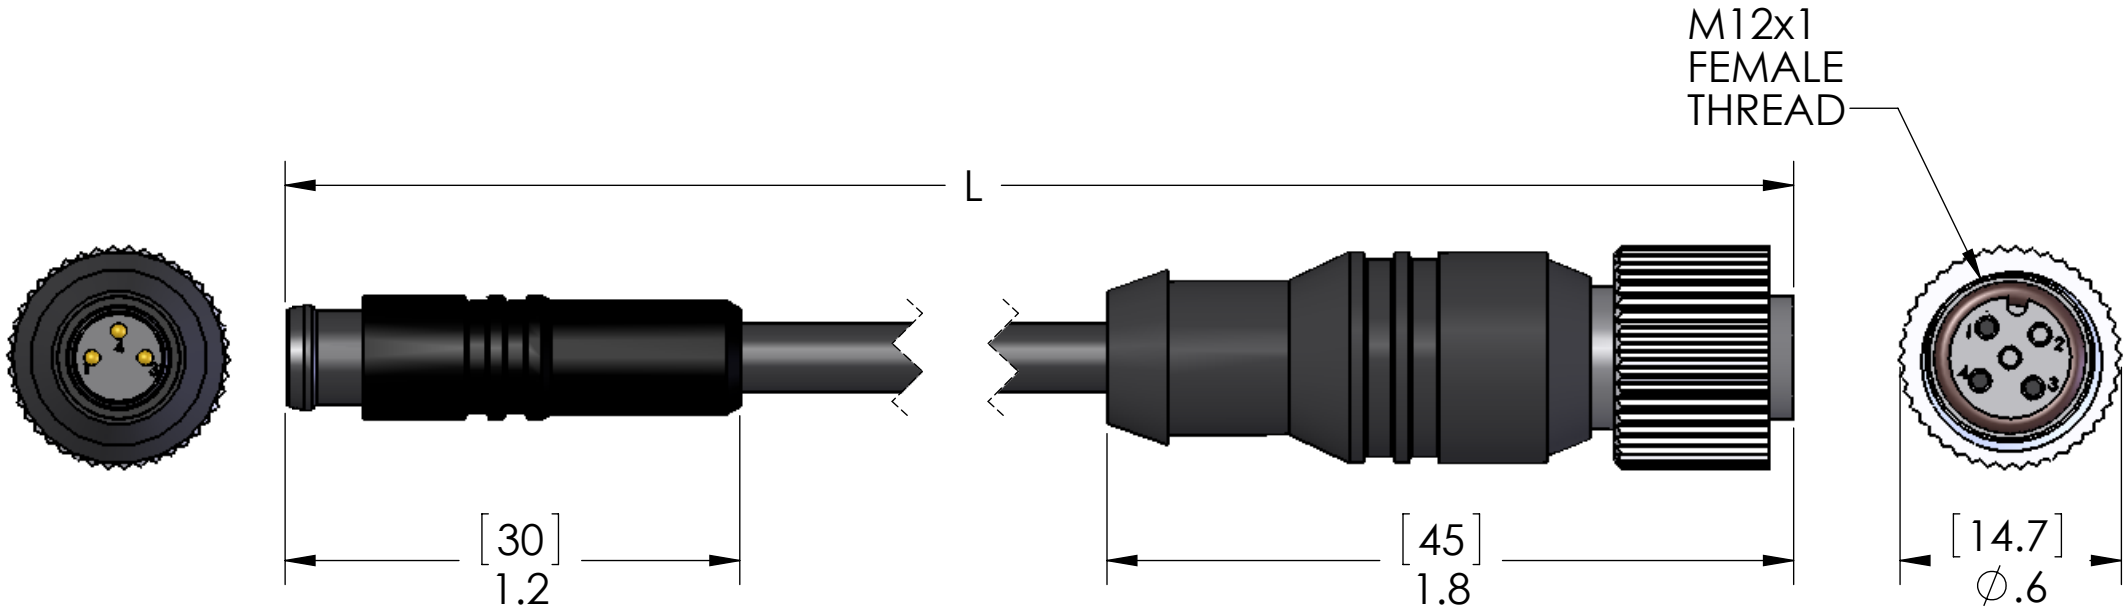


TABLE A		
P/N	L	STD?
NANDC-3MFP-0.5M	19" [0.5M]	YES
NANDC-3MFP-1M	40" [1M]	YES
NANDC-3MFP-1.5M	59" [1.5M]	NO
NANDC-3MFP-2M	79" [2M]	YES
NANDC-3MFP-3M	118" [3M]	YES
NANDC-3MFP-4M	157" [4M]	NO
NANDC-3MFP-5M	197" [5M]	YES
NANDC-3MFP-6M	236" [6M]	NO
NANDC-3MFP-8M	315" [8M]	NO
NANDC-3MFP-10M	393" [10M]	YES
NANDC-3MFP-15M	590" [15M]	NO
NANDC-3MFP-20M	786" [20M]	NO
NANDC-3MFP-25M	983" [25M]	NO
NANDC-3MFP-30M	1179" [30M]	NO

MATERIALS	
BODIES:	BLACK PVC
CONTACTS:	GOLD PLATED COPPER ALLOY
CABLE:	24/3 AWM BLACK JACKET
COUPLING:	NICKEL PLATED BRASS
INSERTS:	POLYAMIDE
O-RING:	FPM

PROPRIETARY AND CONFIDENTIAL  
THE INFORMATION CONTAINED IN THIS  
DRAWING IS THE SOLE PROPERTY OF  
MENCOM CORPORATION. ANY  
REPRODUCTION IN PART OR AS A WHOLE  
WITHOUT THE WRITTEN PERMISSION OF  
MENCOM CORPORATION IS  
PROHIBITED.

VOLTS	60V
AMPS	2A
TEMP	105°C

SPECIFICATIONS DO NOT SCALE DRAWING

UNLESS OTHERWISE SPECIFIED:		NAME
DIMENSIONS ARE IN INCHES AND [MM]	DRAWN	BEM
	CHECKED	
	ENG APPR.	
	MFG APPR.	
	Q.A.	
	COMMENTS:	
MATERIAL		
FINISH		
DO NOT SCALE DRAWING		

PARTS LISTED AS NOT BEING STANDARD  
MAY HAVE MINIMUM ORDER QUANTITIES

MENCOM CORPORATION			
TITLE:			
SIZE	DWG. NO.	REV	
B	NANDC-3MFP-ZZ	A	
SCALE: 2:1	WEIGHT:	SHEET 1 OF 1	