
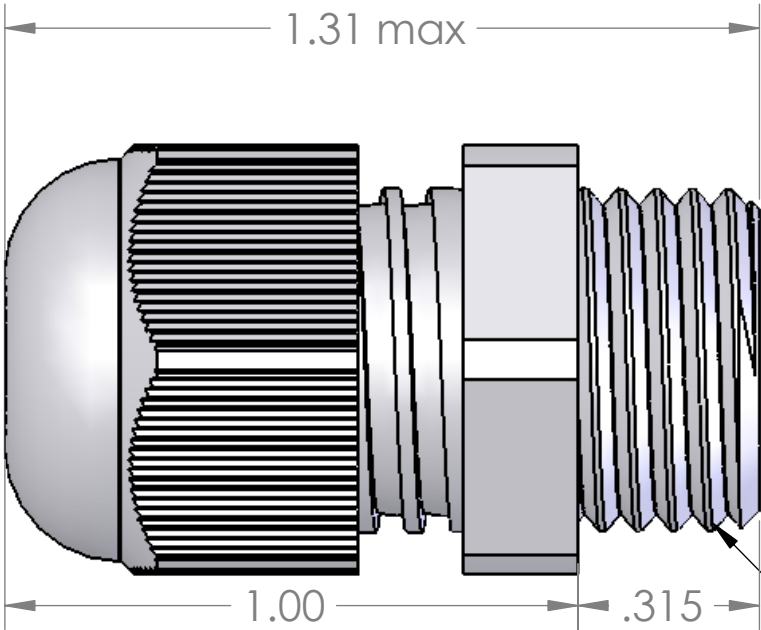


REVISIONS		
REV.	DESCRIPTION	DATE
A	REDRAWN IN SW	2/25/2005

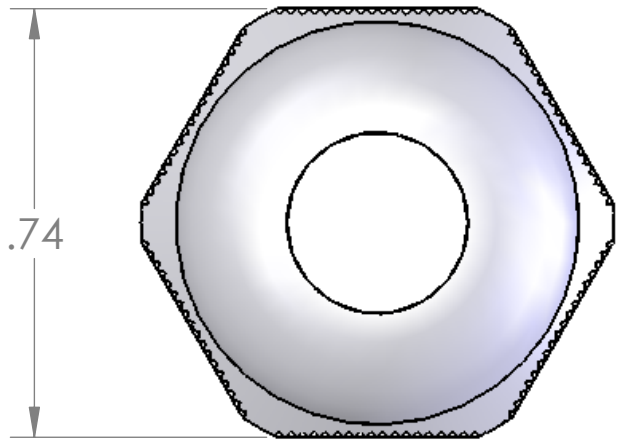

Pg9 Thread

LOCK NUT INCLUDED BUT NOT SHOWN

NO O-RING IS NECESSARY TO OBTAIN IP68 SEAL. CRUSH RIBS ON THE UNDERSIDE OF HEX WILL PROVIDE THE SEAL.

SEAL RATED TO: IP68

MATERIALS	
BODY:	GRAY OR BLACK POLYAMIDE
GROMMET:	NEOPRENE

SPECIFICATIONS:	
TIGHTENING TORQUE:	3.75 Nm
TEMPERATURE:	-20°C - +100°C

APPROVALS:	
US	UL RECOGNIZED
CANADA	C-UL RECOGNIZED

PART NUMBER	COLOR	SEALING RANGE
PCG-09	GRAY	4-8mm
PCG-09R	GRAY	2-6mm
PCG-09-B	BLACK	4-8mm
PCG-09R-B	BLACK	2-6mm

UNLESS OTHERWISE SPECIFIED:		NAME		MENCOM CORPORATION					
DIMENSIONS ARE IN INCHES		DRAWN	BEM			TITLE:			
		CHECKED							
		ENG APPR.							
		MFG APPR.							
		Q.A.							
MATERIAL		COMMENTS:		SIZE		DWG. NO.		REV	
FINISH				B		PCG-09		A	
DO NOT SCALE DRAWING				SCALE: 3:1		WEIGHT:		SHEET 1 OF 1	

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

SPECIFICATIONS	