


REVISIONS		
REV.	DESCRIPTION	DATE
A	REDRAWN IN SW	2/25/2005

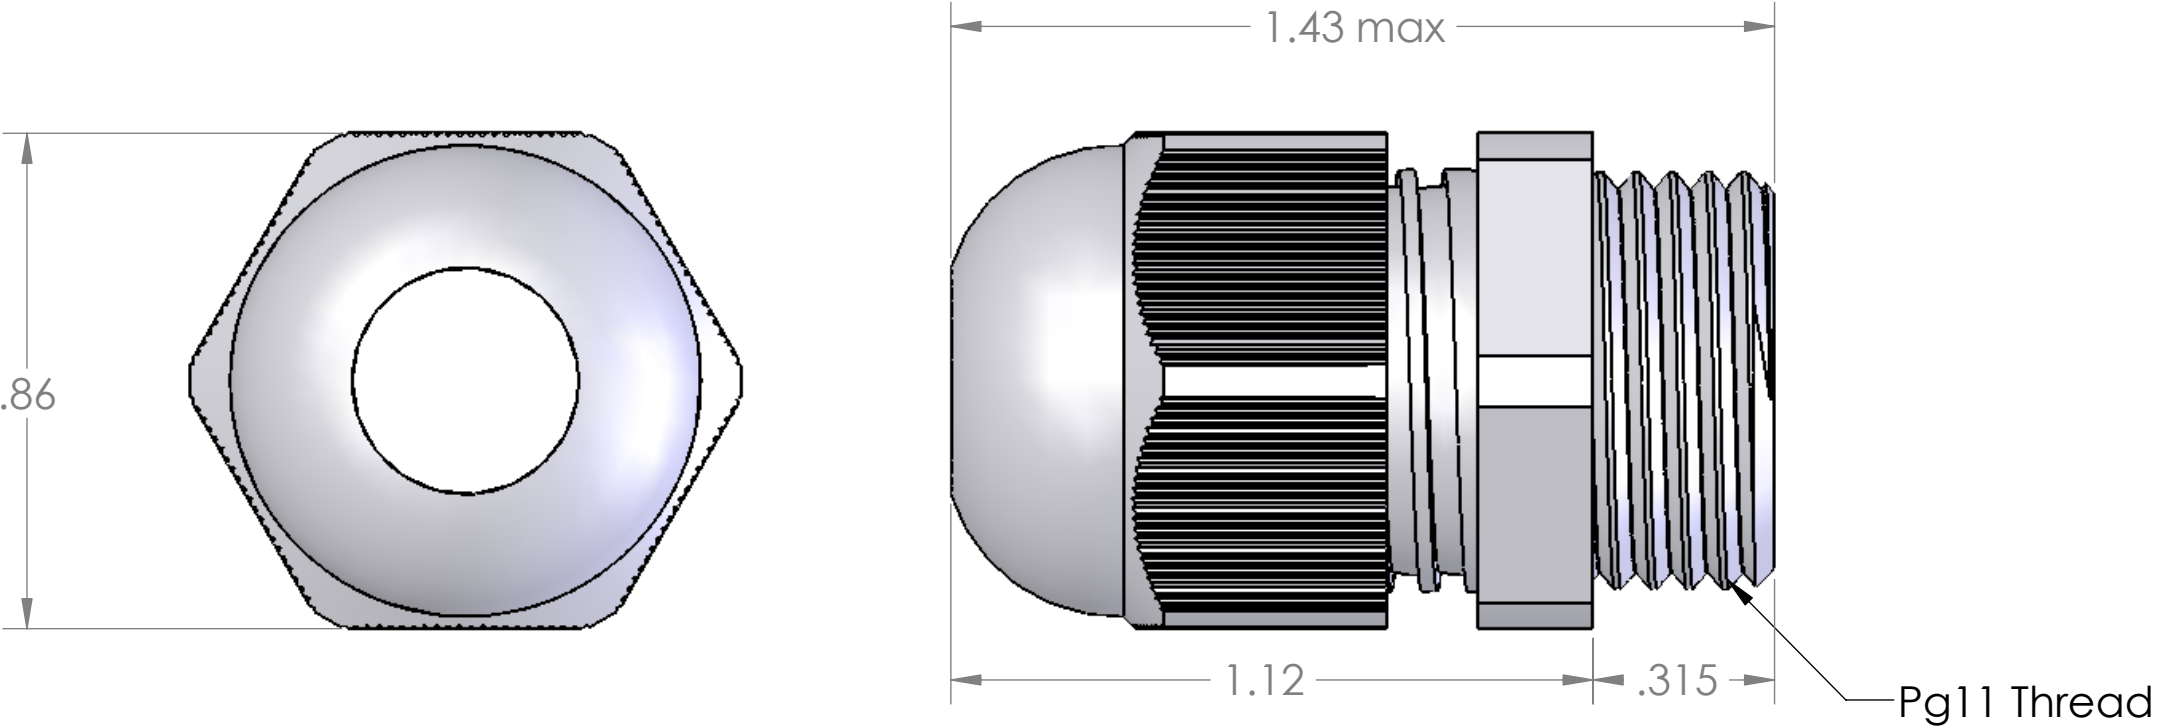

LOCK NUT INCLUDED BUT NOT SHOWN
NO O-RING IS NECESSARY TO OBTAIN IP68 SEAL. CRUSH RIBS
ON THE UNDERSIDE OF HEX WILL PROVIDE THE SEAL.

SEAL RATED TO: IP68

MATERIALS	
BODY:	GRAY OR BLACK POLYAMIDE
GROMMET:	NEOPRENE

SPECIFICATIONS:	
TIGHTENING TORQUE:	3.75 Nm
TEMPERATURE:	-20°C - +100°C

APPROVALS:	
US	UL RECOGNIZED
CANADA	C-UL RECOGNIZED

PART NUMBER	COLOR	SEALING RANGE
PCG-11	GRAY	5-10mm
PCG-11R	GRAY	3-7mm
PCG-11-B	BLACK	5-10mm
PCG-11R-B	BLACK	3-7mm

UNLESS OTHERWISE SPECIFIED:		NAME	MENCOM CORPORATION	
DIMENSIONS ARE IN INCHES		BEM		
	MATERIAL		TITLE:	
	FINISH			
	DO NOT SCALE DRAWING			
SPECIFICATIONS			SIZE	DWG. NO.
			B	PCG-11
			SCALE: 3:1	WEIGHT:
				SHEET 1 OF 1

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.