
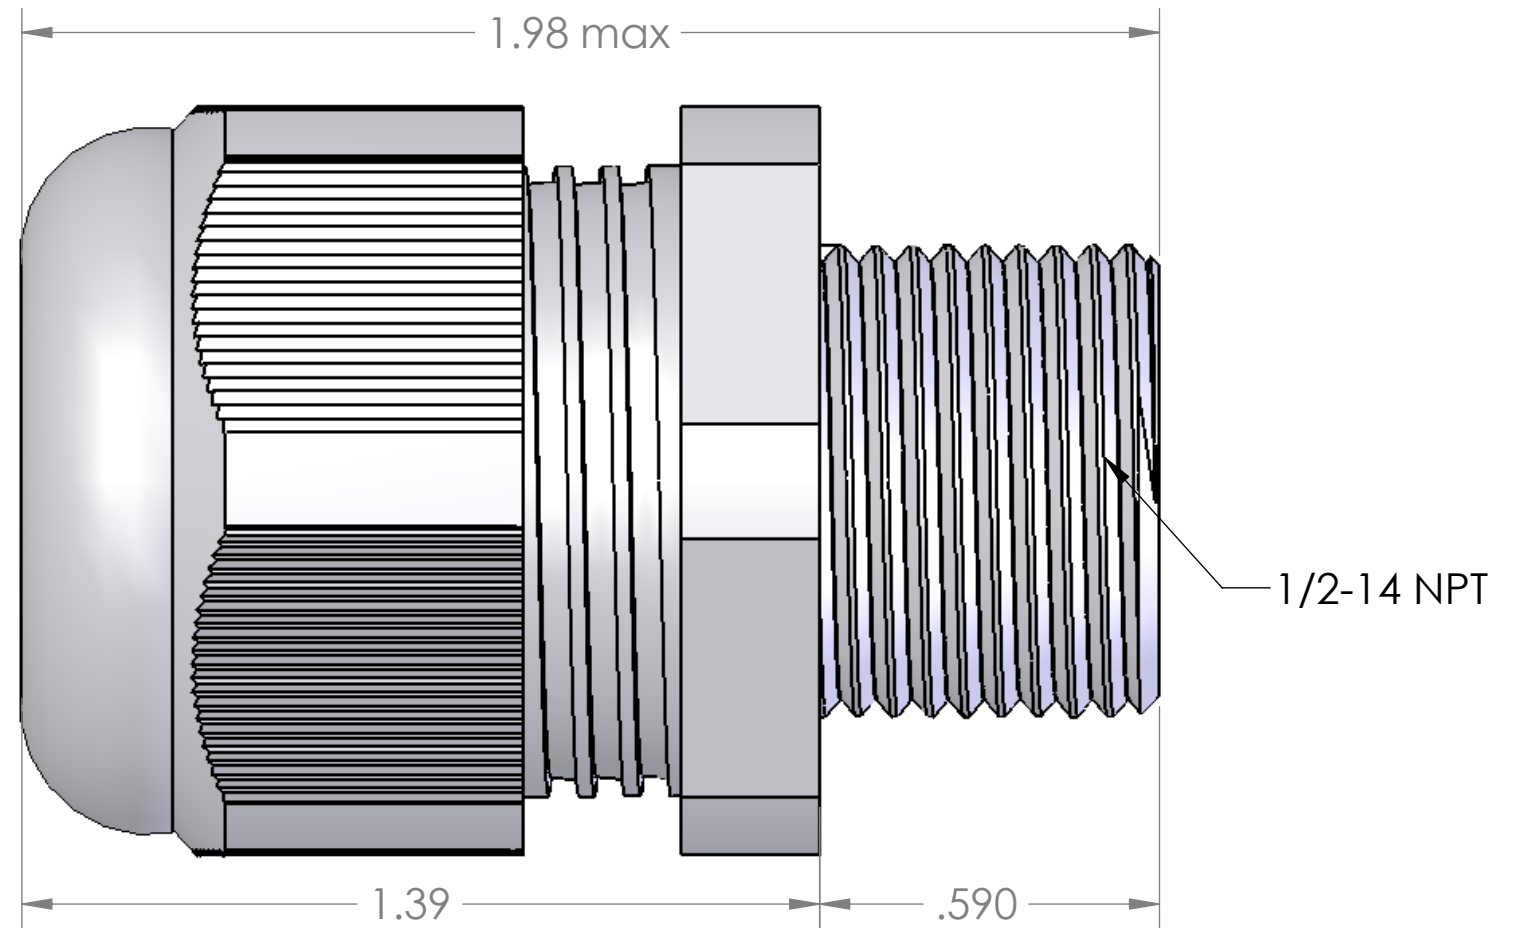


REVISIONS		
REV.	DESCRIPTION	DATE
A	REDRAWN IN SW	6/1/2006

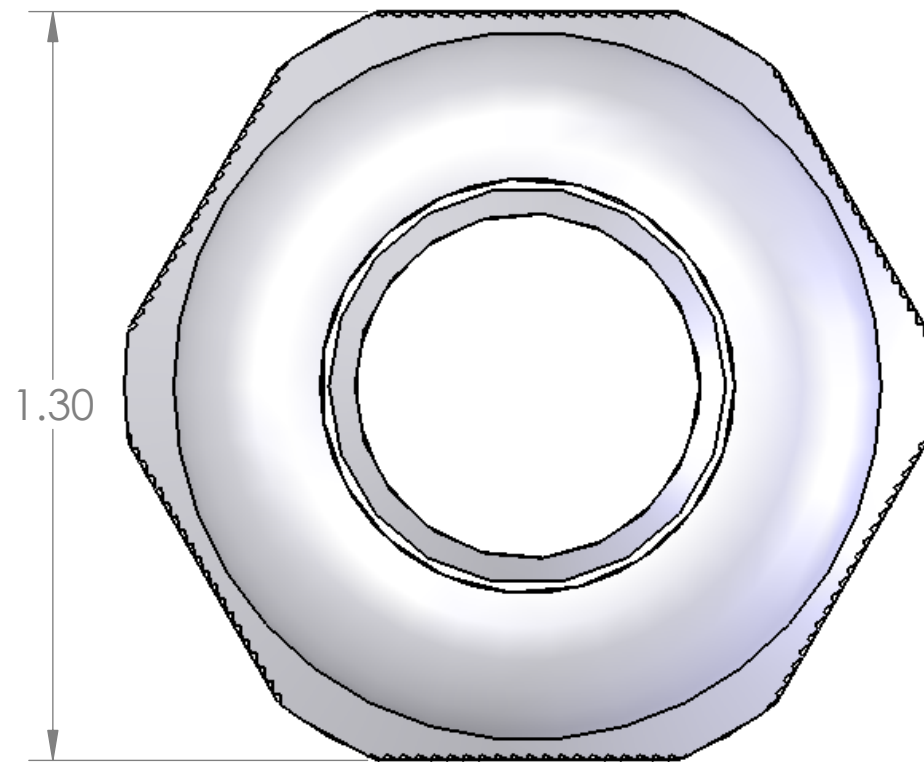

NO O-RING IS NECESSARY TO OBTAIN IP68 SEAL. CRUSH RIBS ON THE UNDERSIDE OF HEX WILL PROVIDE THE SEAL.

MATERIALS	
BODY:	GRAY POLYAMIDE
GROMMET:	NEOPRENE

SPECIFICATIONS:	
TIGHTENING TORQUE:	7.5 Nm
TEMPERATURE:	-20°C - +100°C

APPROVALS:	
US	UL RECOGNIZED
CANADA	C-UL RECOGNIZED

SEAL RATED T0: IP68

PART NUMBER	COLOR	SEALING RANGE
PCG-1/2E	GRAY	.512 - .708 [13 - 18 MM]
PCG-1/2E-B	BLACK	.512 - .708 [13 - 18 MM]

UNLESS OTHERWISE SPECIFIED:		NAME		MENCOM CORPORATION							
DIMENSIONS ARE IN INCHES	DRAWN	DWM						TITLE:			
	CHECKED										
	ENG APPR.										
	MFG APPR.										
	Q.A.										
MATERIAL	COMMENTS:		SIZE	DWG. NO.			REV				
FINISH			B	PCG-1/2E			A				
DO NOT SCALE DRAWING			SCALE: 3:1		WEIGHT:		SHEET 1 OF 1				

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCON CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCON CORPORATION IS
PROHIBITED.