
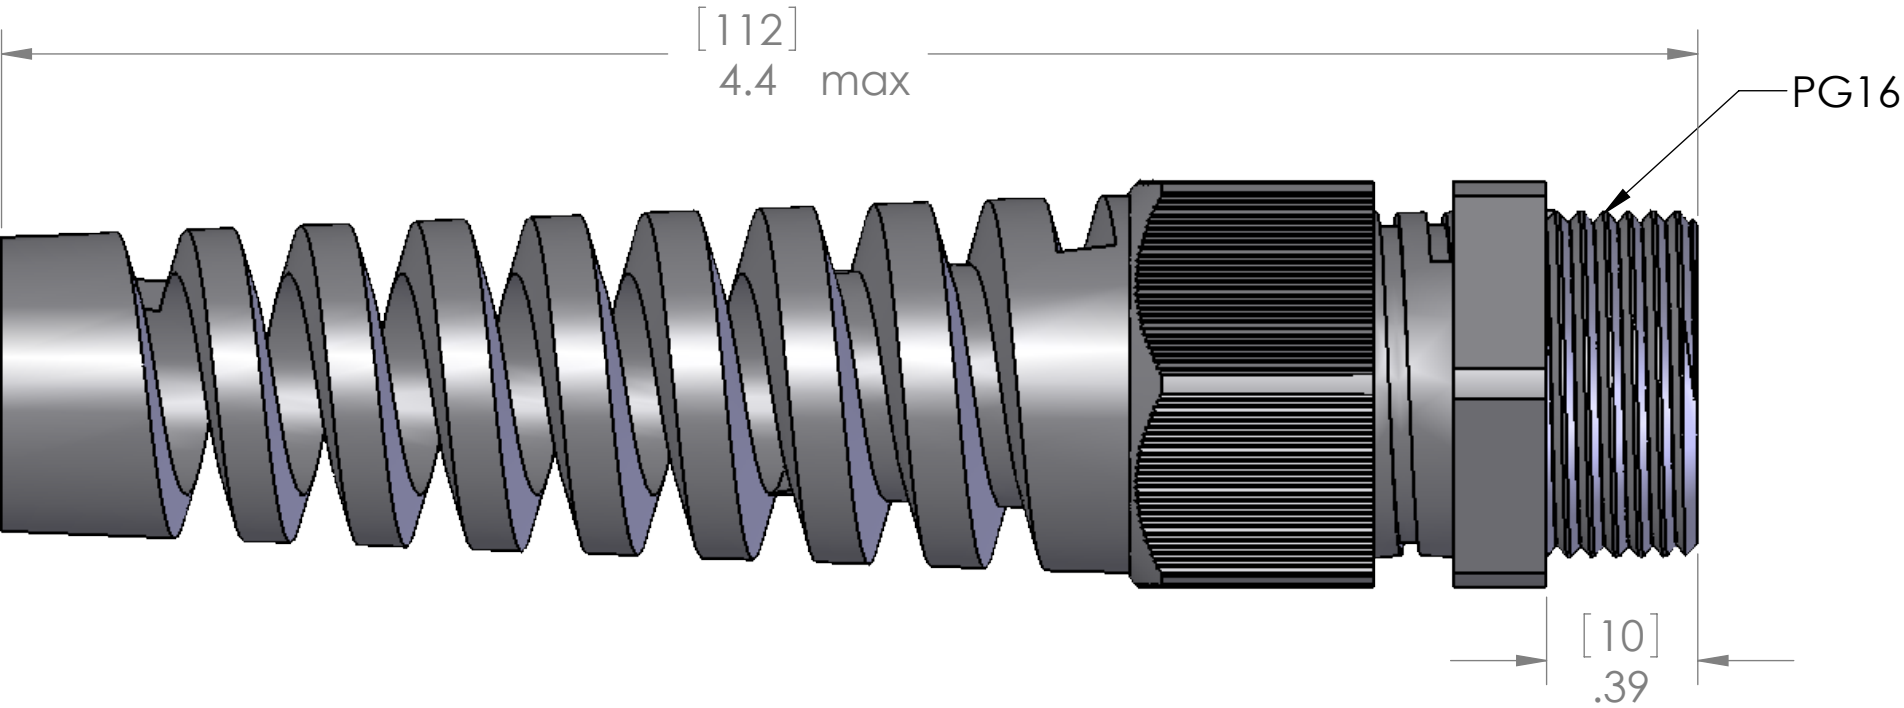


D

C

B

A

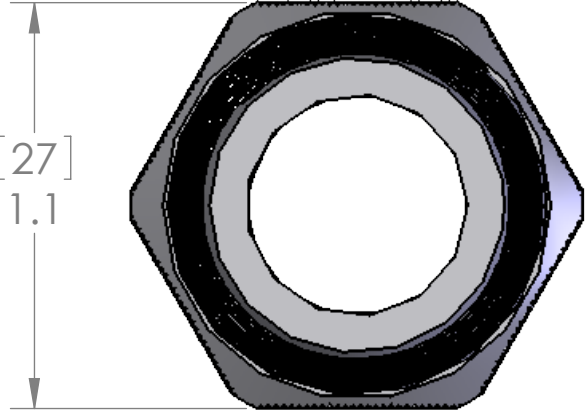

LOCK NUT INCLUDED BUT NOT SHOWN

NO O-RING IS NECESSARY TO OBTAIN IP68 SEAL. CRUSH RIBS ON THE UNDERSIDE OF HEX WILL PROVIDE THE SEAL.

MATERIALS	
BODY:	GRAY POLYAMIDE
GROMMET:	NEOPRENE

SPECIFICATIONS:	
TIGHTENING TORQUE:	5.0 Nm
TEMPERATURE:	-20°C - +100°C

APPROVALS:	
US	UL RECOGNIZED
CANADA	C-UL RECOGNIZED

SEALING RANGE: .394-.551 (10-14 MM)
SEAL RATED TO: IP68

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MM TOLERANCES: FRACTIONAL ±1/64 ANGULAR: MACH ±3° BEND ±5° ONE PLACE DECIMAL ±.2 TWO PLACE DECIMAL ±.1	DRAWN BY	DCG
	DRAWN DATE	09/11/2018
	CHECKED BY	JJH
	CHECK DATE	09/11/2018
	COMMENTS:	
MATERIAL		
FINISH		
DO NOT SCALE DRAWING		

MENCOM CORPORATION		
TITLE: PG16 CABLE GLAND WITH FLEX TOP		
SIZE B	DWG. NO. PCG-16S	REV A
SCALE: 2:1	WEIGHT:	SHEET 1 OF 1

D

C

B

A