


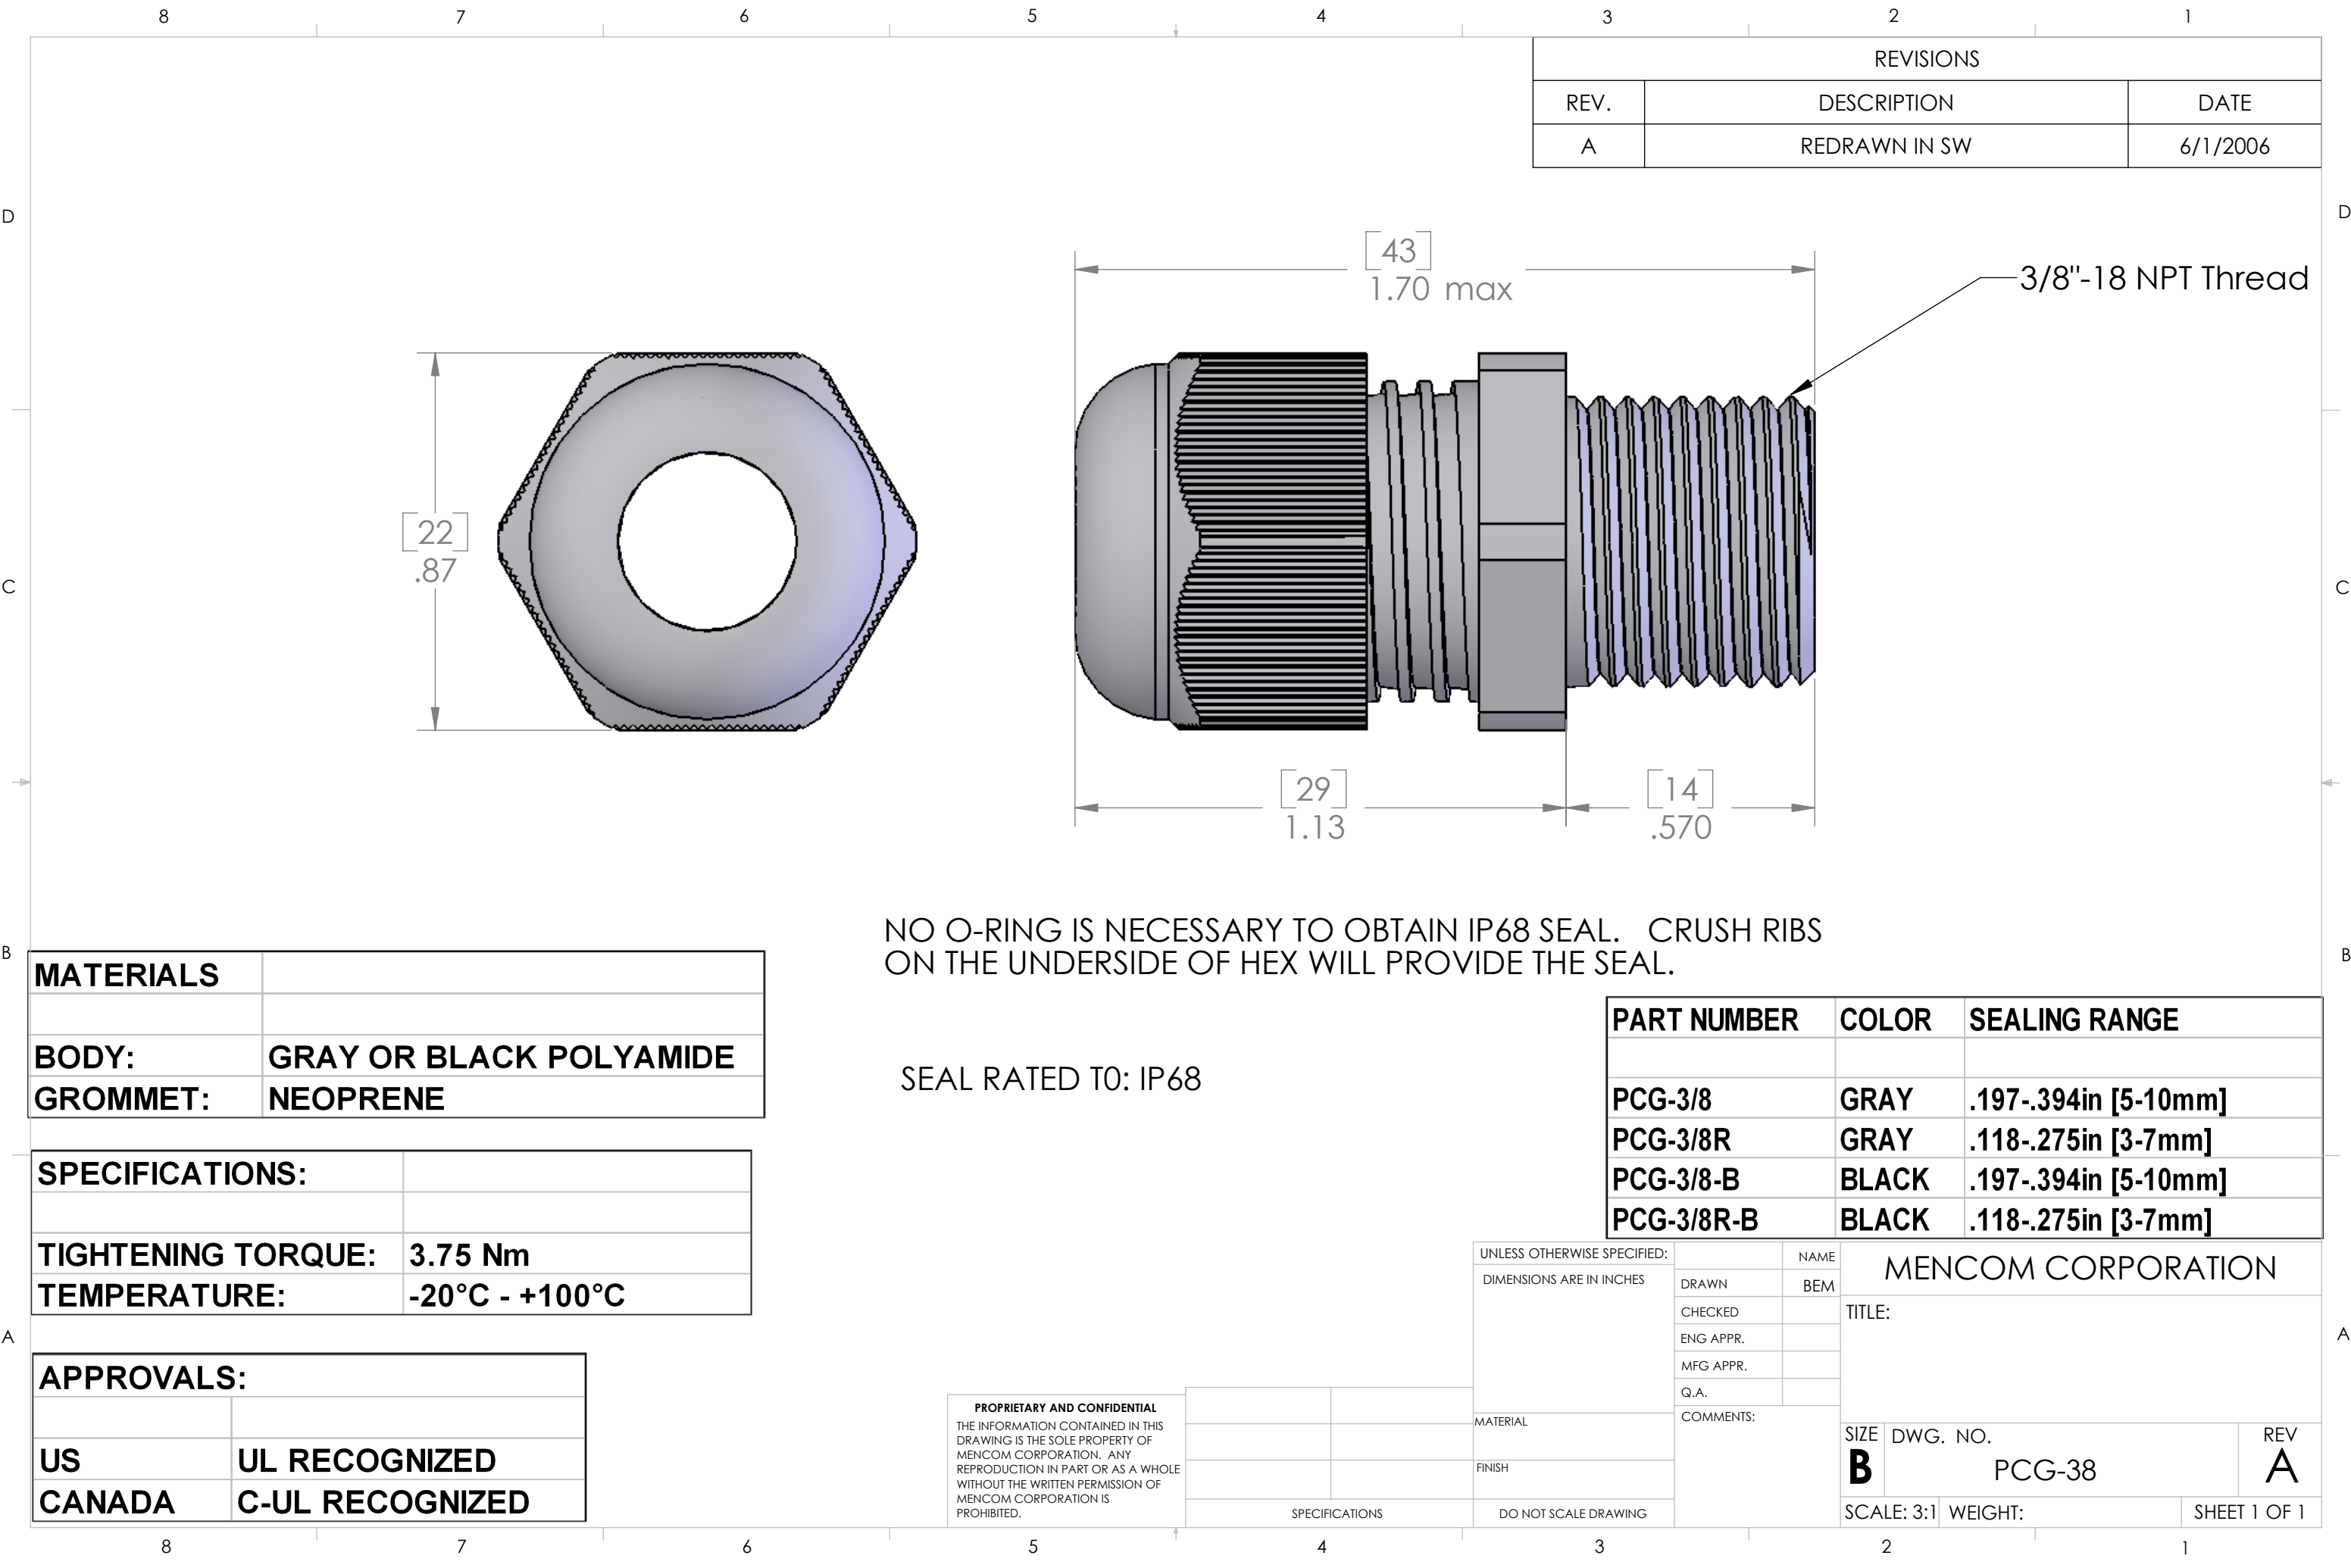

REVISIONS		
REV.	DESCRIPTION	DATE
A	REDRAWN IN SW	6/1/2006

NO O-RING IS NECESSARY TO OBTAIN IP68 SEAL. CRUSH RIBS ON THE UNDERSIDE OF HEX WILL PROVIDE THE SEAL.

SEAL RATED TO: IP68

MATERIALS	
BODY:	GRAY OR BLACK POLYAMIDE
GROMMET:	NEOPRENE

SPECIFICATIONS:	
TIGHTENING TORQUE:	3.75 Nm
TEMPERATURE:	-20°C - +100°C

APPROVALS:	
US	UL RECOGNIZED
CANADA	C-UL RECOGNIZED

PART NUMBER	COLOR	SEALING RANGE
PCG-3/8	GRAY	.197-.394in [5-10mm]
PCG-3/8R	GRAY	.118-.275in [3-7mm]
PCG-3/8-B	BLACK	.197-.394in [5-10mm]
PCG-3/8R-B	BLACK	.118-.275in [3-7mm]

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES		NAME	MENCOM CORPORATION	
	DRAWN	BEM		
	CHECKED			
	ENG APPR.			
	MFG APPR.			
	Q.A.			
MATERIAL	COMMENTS:		TITLE:	
FINISH				
DO NOT SCALE DRAWING				
SPECIFICATIONS		SIZE	DWG. NO.	REV
		B	PCG-38	A
		SCALE: 3:1	WEIGHT:	SHEET 1 OF 1

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.