REVISIONS		
REV.	DESCRIPTION	DATE
A	REDRAWN IN SW	5/10/2006

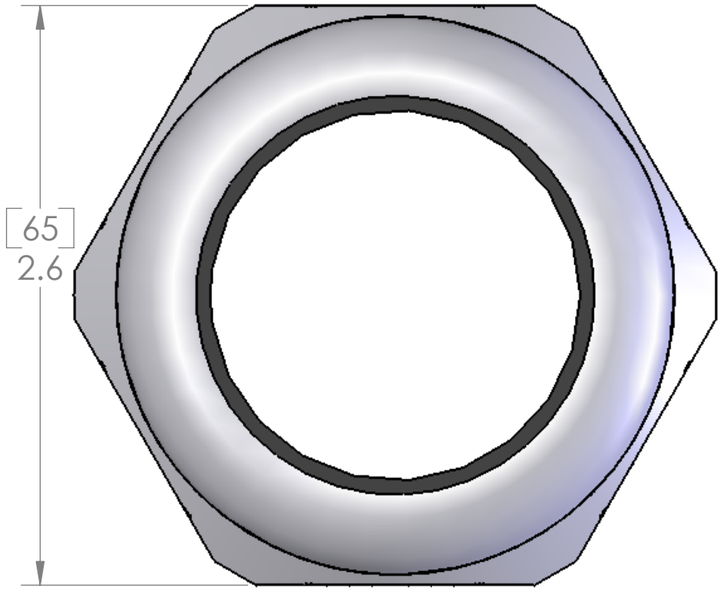

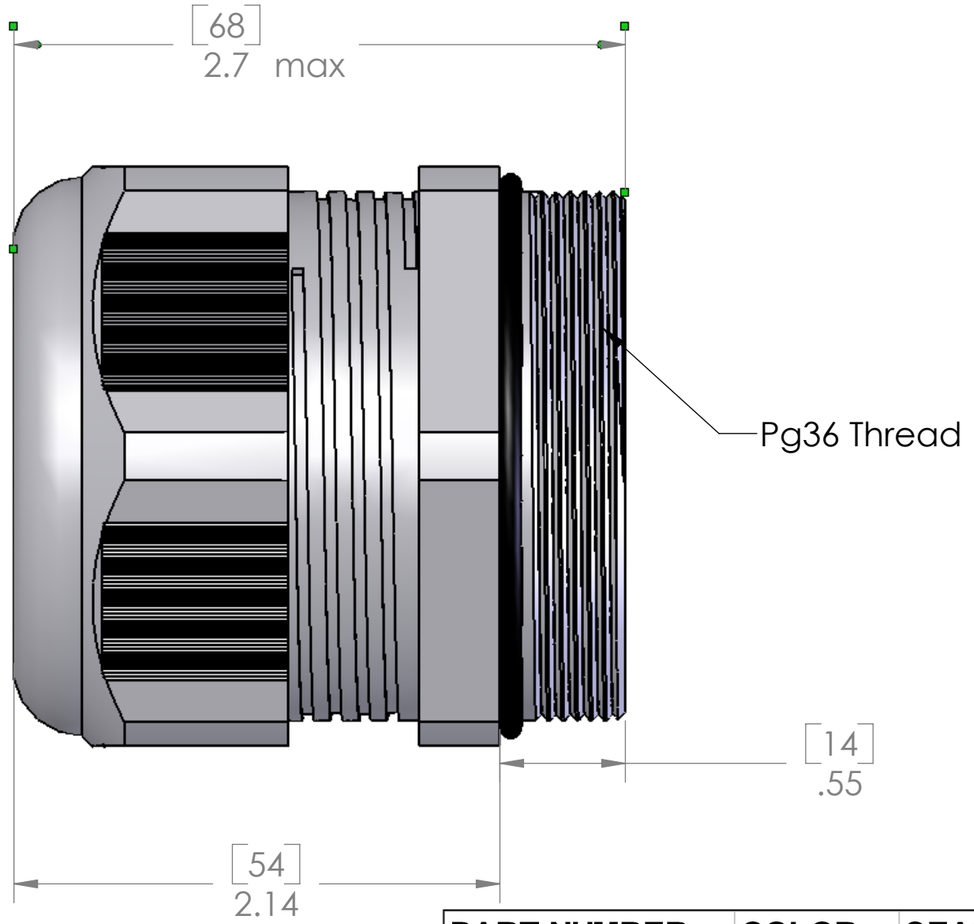

MATERIALS	
BODY:	GRAY OR BLACK POLYAMIDE
GROMMET:	NEOPRENE
O-RING:	BUNA-N

SPECIFICATIONS:	
TIGHTENING TORQUE:	7.5 Nm
TEMPERATURE:	-20°C - +100°C

APPROVALS:	
US	UL RECOGNIZED
CANADA	C-UL RECOGNIZED

236PA LOCK NUT INCLUDED BUT NOT SHOWN

SEAL RATED T0: IP68

PART NUMBER	COLOR	SEALING RANGE
PCG-48	GRAY	34-44mm
PCG-48R	GRAY	29-35mm
PCG-48-B	BLACK	34-44mm
PCG-48R-B	BLACK	29-35mm

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES AND [MM]

	NAME
DRAWN	DWM
CHECKED	
ENG APPR.	
MFG APPR.	
Q.A.	

COMMENTS:

MATERIAL

FINISH

SPECIFICATIONS

DO NOT SCALE DRAWING

MENCOM CORPORATION

TITLE:

SIZE	DWG. NO.	REV
B	PCG-48	A

SCALE: 1.5: WEIGHT: SHEET 1 OF 1