
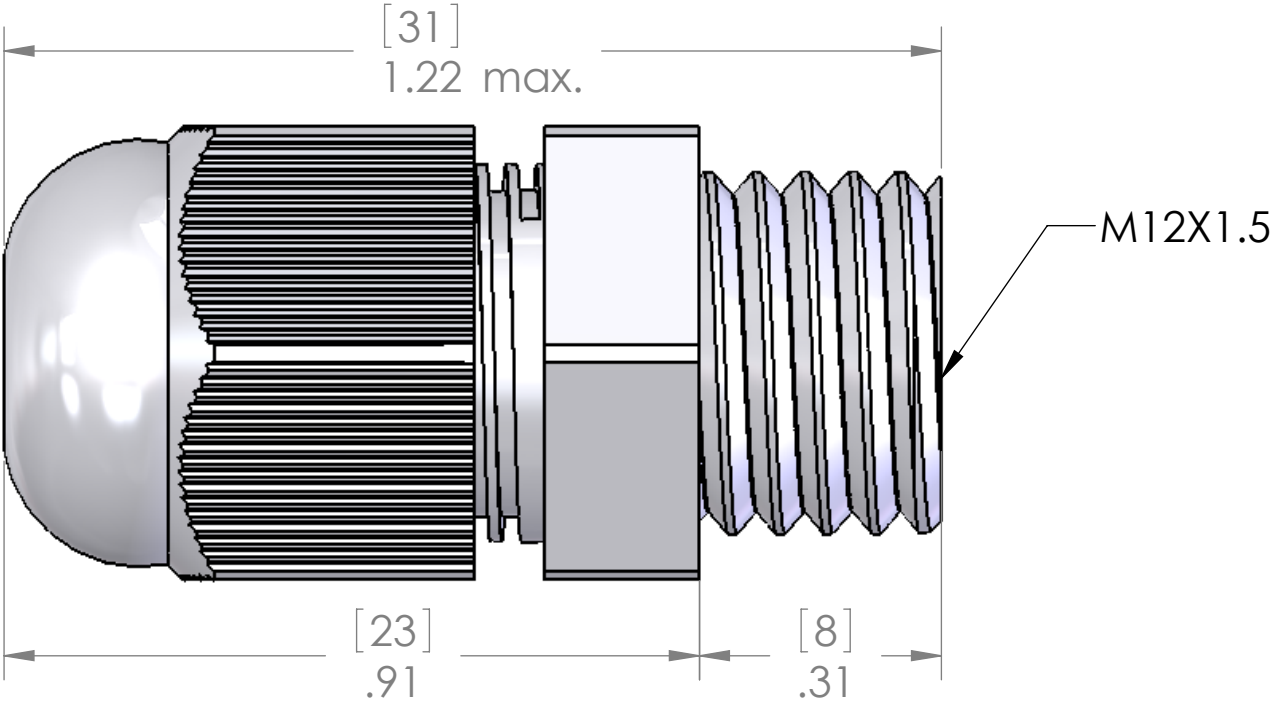


REVISIONS		
REV.	DESCRIPTION	DATE
A	REDRAWN IN SW	8/31/2009

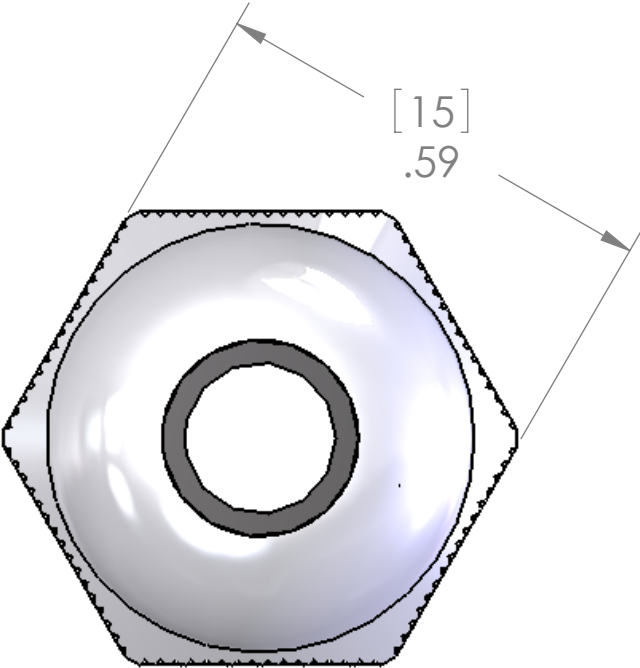

M12 LOCK NUT INCLUDED BUT NOT SHOWN

NO O-RING IS NECESSARY TO OBTAIN IP68 SEAL. CRUSH RIBS ON THE UNDERSIDE OF HEX WILL PROVIDE THE SEAL.

MATERIALS	
BODY:	GRAY OR BLACK POLYAMIDE
GROMMET:	NEOPRENE

SPECIFICATIONS:	
TIGHTENING TORQUE:	3.75 Nm
TEMPERATURE:	-20°C - +100°C

APPROVALS:	
US	UL RECOGNIZED
CANADA	C-UL RECOGNIZED

PART NUMBER	COLOR	SEALING RANGE
PCG-M12	GRAY	3-6.5mm
PCG-M12R	GRAY	2-5mm
PCG-M12-B	BLACK	3-6.5mm
PCG-M12R-B	BLACK	2-5mm

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MM]		NAME	MENCOM CORPORATION		
	DRAWN	BEM	TITLE:		
	CHECKED				
	ENG APPR.				
	MFG APPR.				
	Q.A.				
MATERIAL	COMMENTS:	SIZE	DWG. NO.	REV	
FINISH		B	PCG-M12	A	
DO NOT SCALE DRAWING		SCALE: 4:1	WEIGHT:	SHEET 1 OF 1	

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.