
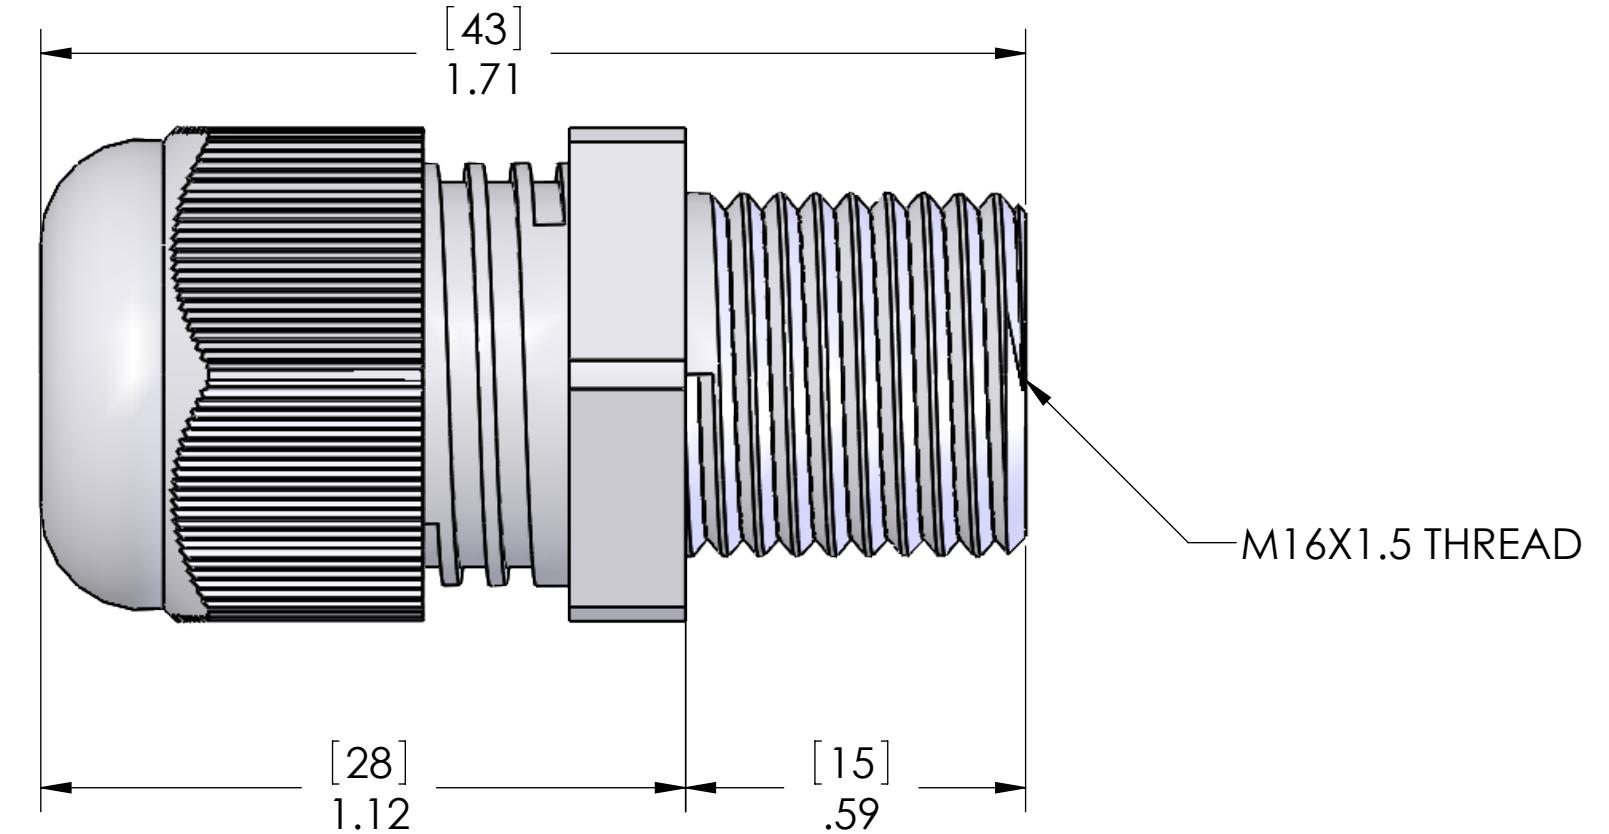


D

D

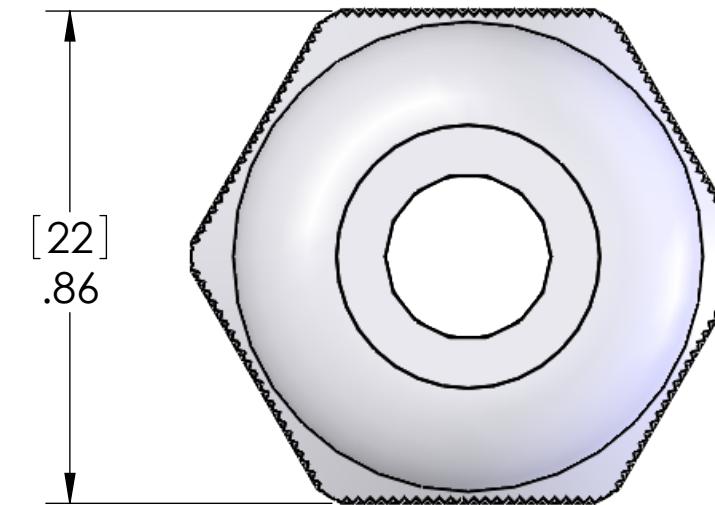

2M16PA LOCK NUT INCLUDED BUT NOT SHOWN FOR CLARITY

NO O-RING IS NECESSARY TO OBTAIN IP68 SEAL. CRUSH RIBS ON THE UNDERSIDE OF HEX WILL PROVIDE THE SEAL.

MATERIALS

BODY: GRAY POLYAMIDE

GROMMET: NEOPRENE

SPECIFICATIONS:

TIGHTENING TORQUE: 3.75 Nm

TEMPERATURE: -20°C - +100°C

APPROVALS:

US UL RECOGNIZED

CANADA C-UL RECOGNIZED

PART NUMBER	COLOR	SEALING RANGE
PCG-M16RL	GRAY	3-7mm
PCG-M16RL-B	BLACK	3-7mm

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MM]	DRAWN BY	ADM	MENCOM CORPORATION TITLE:
	DRAWN DATE	06/22/2020	
	CHECKED BY	ADM	
	CHECK DATE	06/22/2020	
COMMENTS:			
SIZE	DWG. NO.		REV
B	PCG-M16RL		A
SCALE: 3:1	WEIGHT:		SHEET 1 OF 1

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.