


PIN #	COLOR
1	BLACK
2	GREEN/YELLOW
3	WHITE

DEVICE IS INTENDED TO BE WIRED WITH
CONDUCTORS RATED AT 75°C OR HIGHER

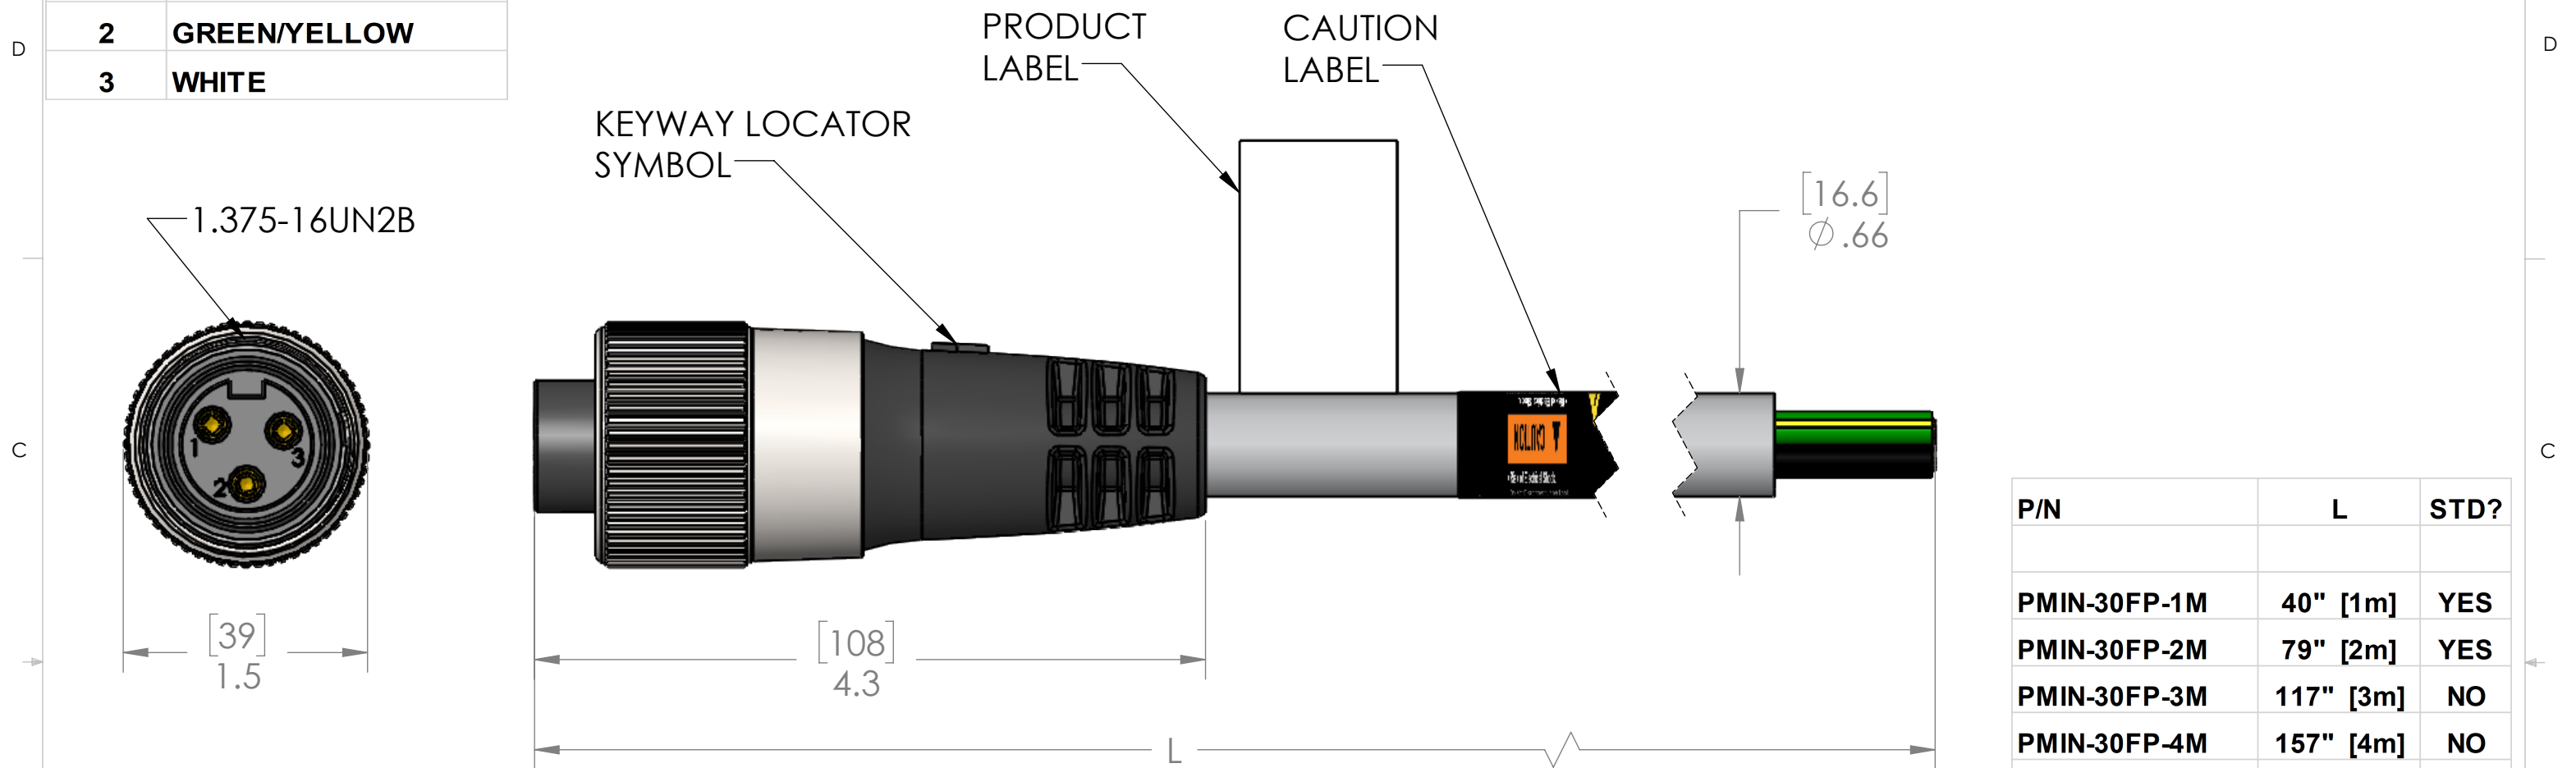

P/N	L	STD?
PMIN-30FP-1M	40" [1m]	YES
PMIN-30FP-2M	79" [2m]	YES
PMIN-30FP-3M	117" [3m]	NO
PMIN-30FP-4M	157" [4m]	NO
PMIN-30FP-5M	197" [5m]	YES
PMIN-30FP-6M	236" [6m]	NO
PMIN-30FP-8M	315" [8m]	NO
PMIN-30FP-10M	393" [10m]	YES
PMIN-30FP-15M	590" [15M]	YES
PMIN-30FP-20M	787" [20M]	NO

PARTS LISTED AS NOT BEING STANDARD
MAY REQUIRE MINIMUM ORDERS
OTHER LENGTHS AVAILABLE,
PLEASE CONSULT FACTORY

MATERIALS	
BODY:	BLACK PVC
CONTACTS:	GOLD PLATED COPPER ALLOY
CABLE:	
STYLE:	STOOW
AWG:	10 AWG
JACKET:	GRAY PVC
VOLTAGE:	600V
SHIELD:	NO
COUPLING:	NICKEL PLATED BRASS
INSERT:	BLACK PVC
RATINGS	
SCCR RATING:	65 kA Breakers and Fuses
RoHS COMPLIANT:	YES
PROTECTION:	IEC IP67
UL CATEGORY:	PVVA (US), PVVA7 (Canada)
U.S.:	UL 2237 LISTED, File E469485
CANADA:	C-UL 2237 LISTED, File E469485

CAUTION:
RISK OF ELECTRICAL SHOCK
DO NOT DISCONNECT UNDER LOAD

C	UNLESS OTHERWISE SPECIFIED:	DRAWN BY	ADM
	DIMENSIONS ARE IN INCHES AND [MM]	DRAWN DATE	02/16/2022
		CHECKED BY	JJH
		CHECK DATE	02/16/2022
	MATERIAL	COMMENTS:	
	FINISH		
	DO NOT SCALE DRAWING		

MENCOM CORPORATION			
TITLE: 3 PL FEM PLG PMIN 10AWG			
SIZE B	DWG. NO. PMIN-30FP-ZZ		REV C
SCALE: 1:1	WEIGHT:		SHEET 1 OF 1

<p>PROPRIETARY AND CONFIDENTIAL</p> <p>THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.</p>	VOLTS	600V
	AMPS	42A
	TEMP:	-40° to 90°C