


MATERIALS		
SHELL:	NICKEL PLATED BRASS	
CONTACTS:	GOLD PLATED COPPER ALLOY	
WIRE:		
STYLE:	UL 1015	
AWG:	10 AWG	
JACKET:	PVC	
VOLTAGE:	600V	
INSERT:	BLACK PVC	
O-RING:	BLACK TPE	
NUT:	ZINC PLATED STEEL	
RATINGS		
SCCR RATING:	65 kA Breakers and Fuses	
ROHS COMPLIANT:	YES	
PROTECTION:	IEC IP67	
UL CATEGORY:	PVVA (US), PVVA7 (Canada)	
U.S.:	UL 2237 LISTED, File E469485	
CANADA:	C-UL 2237 LISTED, File E469485	

DEVICE IS INTENDED TO BE WIRED WITH CONDUCTORS RATED AT 75°C OR HIGHER

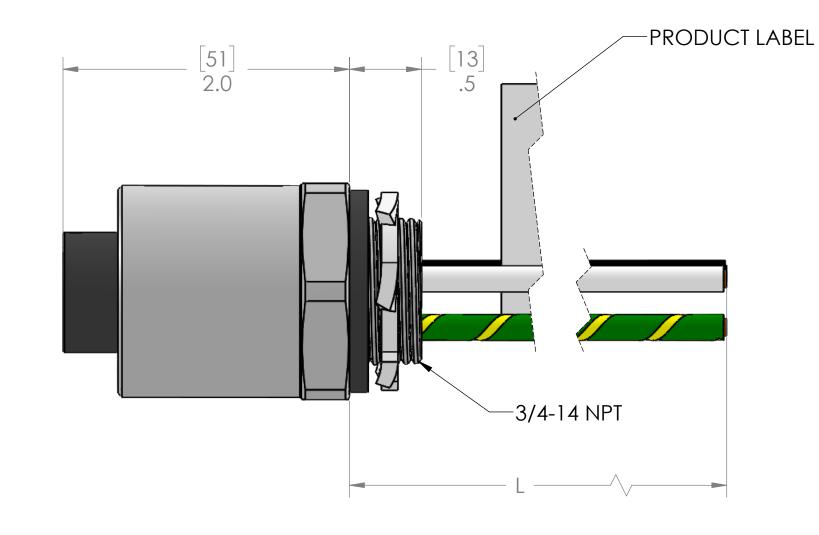

RISK OF ELECTRICAL SHOCK DO NOT DISCONNECT UNDER LOAD

		UNLESS OTHERWISE SPECIFIED:	DRAWN BY	JJH	
		DIMENSIONS ARE IN INCHES	DRAWN DATE	02/16/2024	[]
		AND [MM]	CHECKED BY	JJH	TITLE
			CHECK DATE	02/16/2024	
VOLTS	600V		COMMENTS:		
AMPS	42A	MATERIAL	COMMENTS.		SIZE
TEMP:	-40°C TO 90°C	FINISH			R
		DO NOT SCALE DRAWING			SCALE

P/N	L			
PMIN-30FR-0.3M-34	12" [0.3m]			
PMIN-30FR-0.5M-34	20" [0.5m]			
PMIN-30FR-1M-34	40" [1m]			
PMIN-30FR-2M-34	79" [2m]			
PMIN-30FR-3M-34	117" [3m]			
PMIN-30FR-4M-34	157" [4m]			
PMIN-30FR-5M-34	197" [5m]			
PMIN-30FR-6M-34	236" [6m]			
PMIN-30FR-8M-34	315" [8m]			
PMIN-30FR-10M-34	393" [10m]			
OTHER LENGTHS AVAILABLE				

CONSULT FACTORY

MENCOM CORPORATION	1
ITI F:	

3 PL FEM PMIN RCP 3/4 **NPT**

SIZE	DWG.	NO.		REV
В		PMIN-30FR-ZZ-34		D
SCAL	E: 3:2	WEIGHT:	SHEET	1 OF 1

MENCOM CORPORATION IS PROHIBITED.

PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS

DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF