
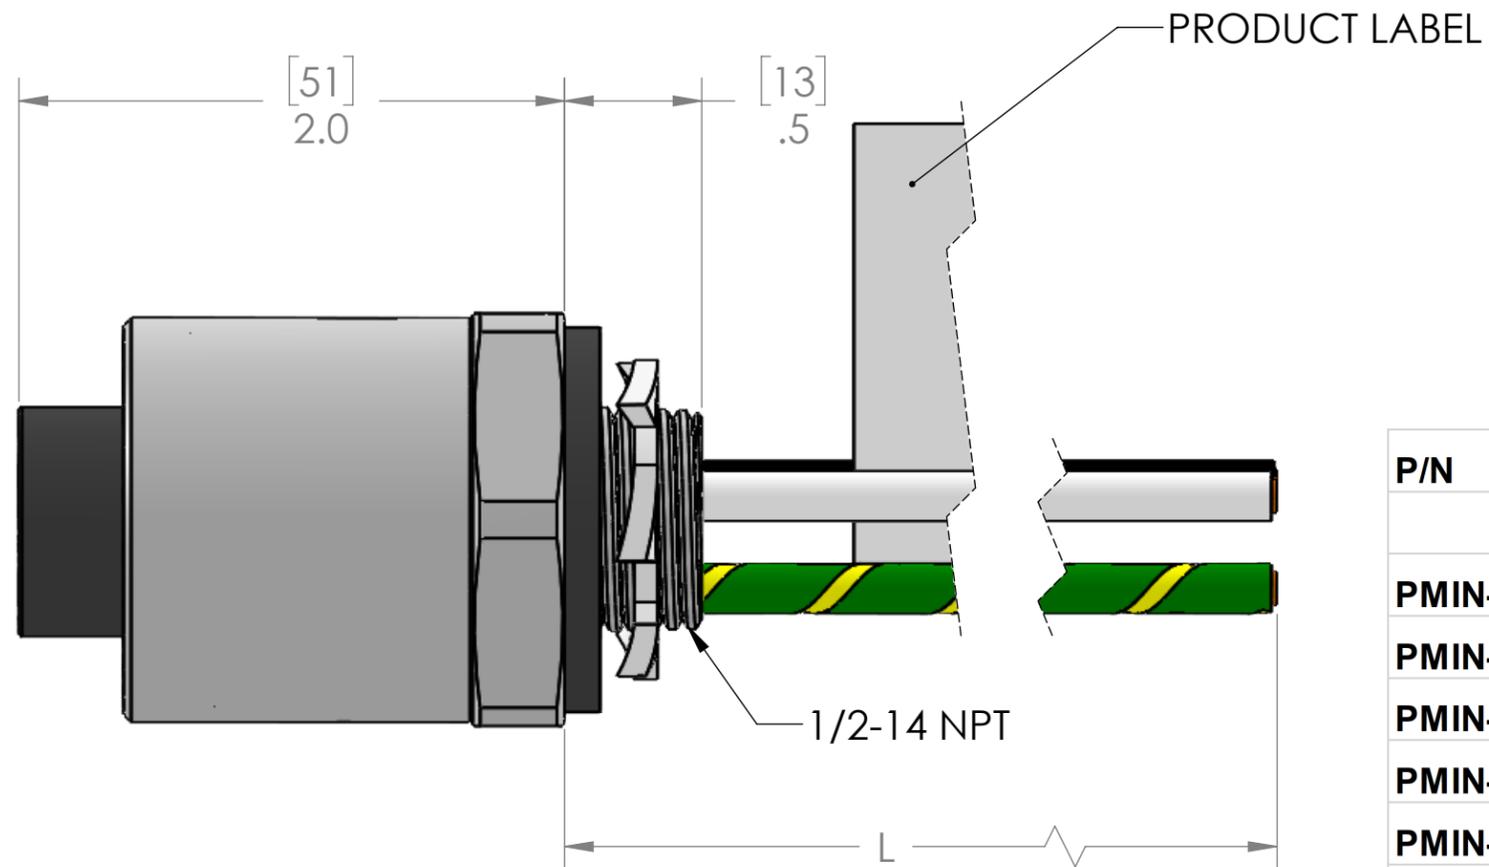


PIN #	COLOR
1	BLACK
2	GREEN/YELLOW
3	WHITE

DEVICE IS INTENDED TO BE WIRED WITH CONDUCTORS RATED AT 75°C OR HIGHER

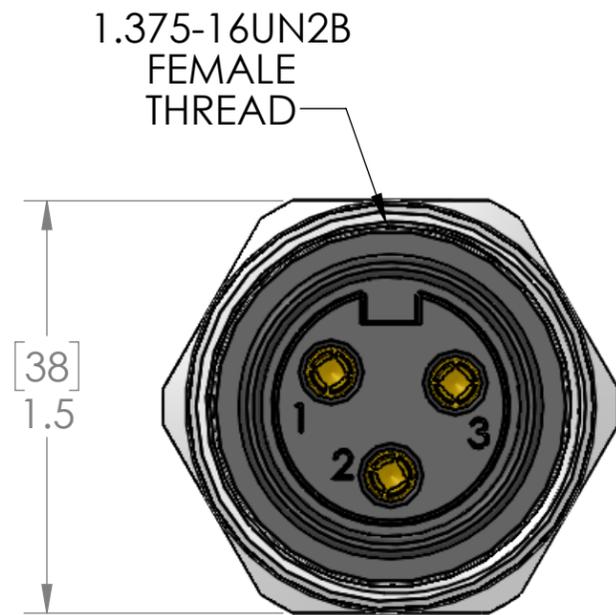

P/N	L
PMIN-30FR-0.3M	12" [0.3m]
PMIN-30FR-0.5M	20" [0.5m]
PMIN-30FR-1M	40" [1m]
PMIN-30FR-2M	79" [2m]
PMIN-30FR-3M	117" [3m]
PMIN-30FR-4M	157" [4m]
PMIN-30FR-5M	197" [5m]
PMIN-30FR-6M	236" [6m]
PMIN-30FR-8M	315" [8m]
PMIN-30FR-10M	393" [10m]

**CAUTION:**  
RISK OF ELECTRICAL SHOCK  
DO NOT DISCONNECT UNDER LOAD

<b>MATERIALS</b>	
SHELL:	NICKEL PLATED BRASS
CONTACTS:	GOLD PLATED COPPER ALLOY
<b>WIRE:</b>	
STYLE:	UL 1015
AWG:	10 AWG
JACKET:	PVC
VOLTAGE:	600V
INSERT:	BLACK PVC
O-RING:	BLACK TPE
NUT:	ZINC PLATED STEEL

<b>RATINGS</b>	
SCCR RATING:	65 kA Breakers and Fuses
RoHS COMPLIANT:	YES
PROTECTION:	IEC IP67
UL CATEGORY:	PVVA (US), PVVA7 (Canada)
U.S.:	UL 2237 LISTED, File E469485
CANADA:	C-UL 2237 LISTED, File E469485

**PROPRIETARY AND CONFIDENTIAL**  
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

VOLTS	600V
AMPS	42A
TEMP:	-40°C TO 90°C

UNLESS OTHERWISE SPECIFIED:	DRAWN BY	JJH
DIMENSIONS ARE IN INCHES AND [MM]	DRAWN DATE	02/16/2024
	CHECKED BY	JJH
	CHECK DATE	02/16/2024
COMMENTS:		
MATERIAL		
FINISH		
DO NOT SCALE DRAWING		

MENCOM CORPORATION		
TITLE: 3 PL FEM PMIN RCP 1/2 NPT		
SIZE	DWG. NO.	REV
<b>B</b>	PMIN-30FR-ZZ	<b>D</b>
SCALE: 3:2	WEIGHT:	SHEET 1 OF 1

OTHER LENGTHS AVAILABLE  
CONSULT FACTORY