


PIN #	COLOR
1	BLACK
2	GREEN/YELLOW
3	WHITE

DEVICE IS INTENDED TO BE WIRED WITH  
CONDUCTORS RATED AT 75°C OR HIGHER

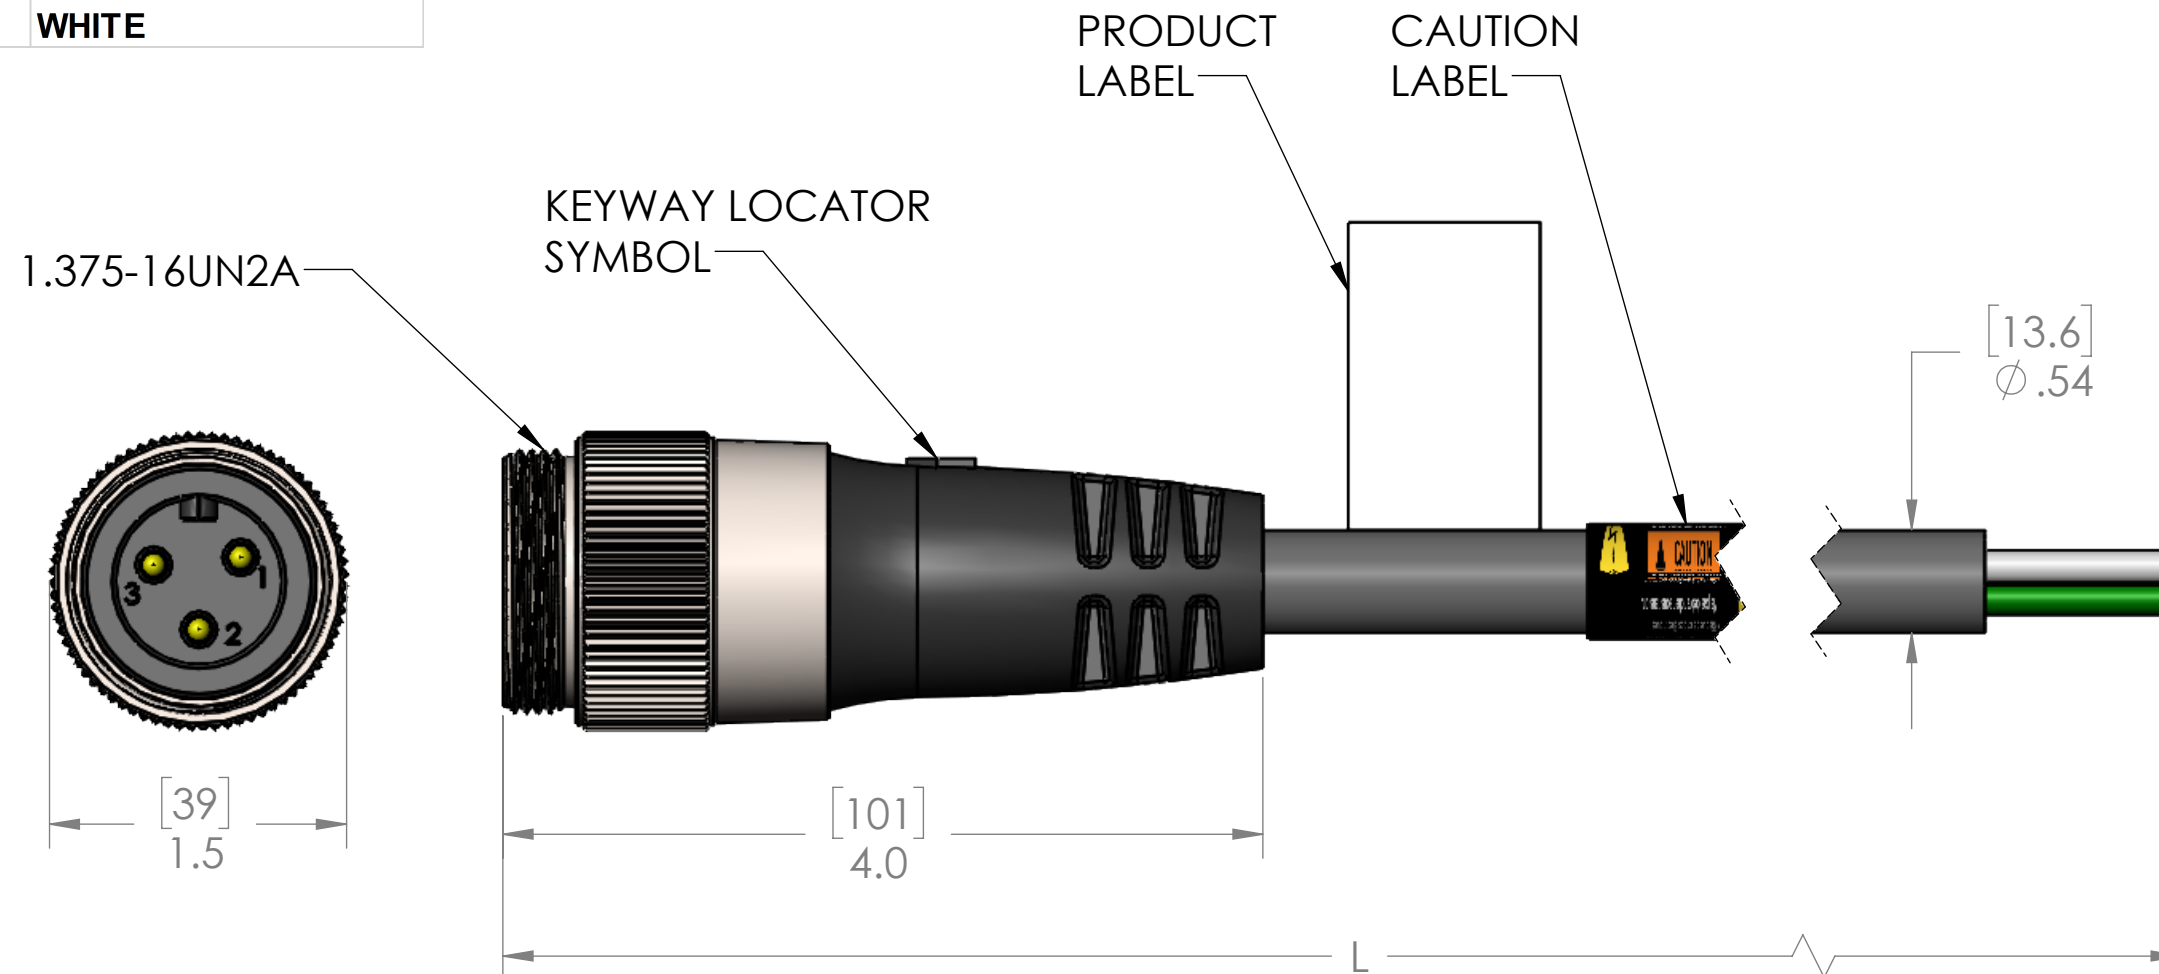

P/N	L	STD?
PMIN-34MP-1M	40" [1m]	YES
PMIN-34MP-2M	79" [2m]	YES
PMIN-34MP-3M	117" [3m]	NO
PMIN-34MP-4M	157" [4m]	NO
PMIN-34MP-5M	197" [5m]	YES
PMIN-34MP-6M	236" [6m]	NO
PMIN-34MP-8M	315" [8m]	NO
PMIN-34MP-10M	393" [10m]	YES
PMIN-34MP-15M	590" [15M]	YES

PARTS LISTED AS NOT BEING STANDARD  
MAY REQUIRE MINIMUM ORDERS  
OTHER LENGTHS AVAILABLE,  
PLEASE CONSULT FACTORY

MATERIALS	
BODY:	BLACK PVC
CONTACTS:	GOLD PLATED COPPER ALLOY
CABLE:	
STYLE:	STOOW
AWG:	14 AWG
JACKET:	GRAY PVC
VOLTAGE:	600V
SHIELD:	NO
COUPLING:	NICKEL PLATED BRASS
INSERT:	BLACK PVC
RATINGS	
SCCR RATING:	65 kA Breakers and Fuses
RoHS COMPLIANT:	YES
PROTECTION:	IEC IP67
UL CATEGORY:	PVVA (US), PVVA7 (Canada)
U.S.:	UL 2237 LISTED, File E469485
CANADA:	C-UL 2237 LISTED, File E469485

**CAUTION:**  
**RISK OF ELECTRICAL SHOCK**  
**DO NOT DISCONNECT UNDER LOAD**

<p><b>PROPRIETARY AND CONFIDENTIAL</b></p> <p>THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.</p>	VOLTS	600V
	AMPS	30A
	TEMP:	-40° to 90°C

UNLESS OTHERWISE SPECIFIED:		DRAWN BY	ADM	MENCOM CORPORATION  TITLE:  3 PL MAL PLG PMIN 14AWG		
DIMENSIONS ARE IN INCHES AND [MM]		DRAWN DATE	02/16/2024			
		CHECKED BY	JJH			
		CHECK DATE	02/19/2024			
				SIZE	DWG. NO.	REV
MATERIAL		COMMENTS:				
FINISH						
DO NOT SCALE DRAWING						
				<b>B</b>	PMIN-34MP-ZZ	<b>C</b>
				SCALE: 1:1	WEIGHT:	SHEET 1 OF 1