



PIN #	COLOR
1	BLACK
2	GREEN/YELLOW
3	WHITE

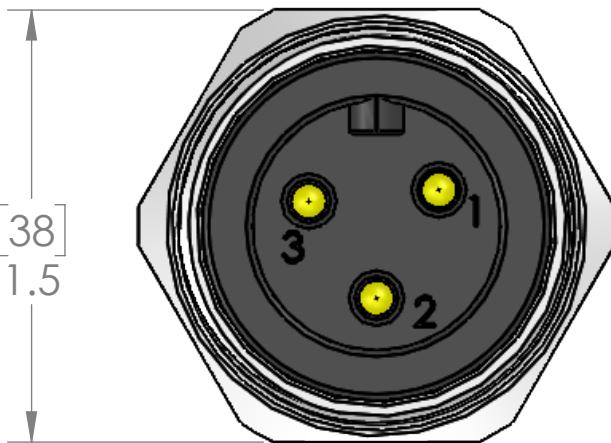

1.375-16UN2A

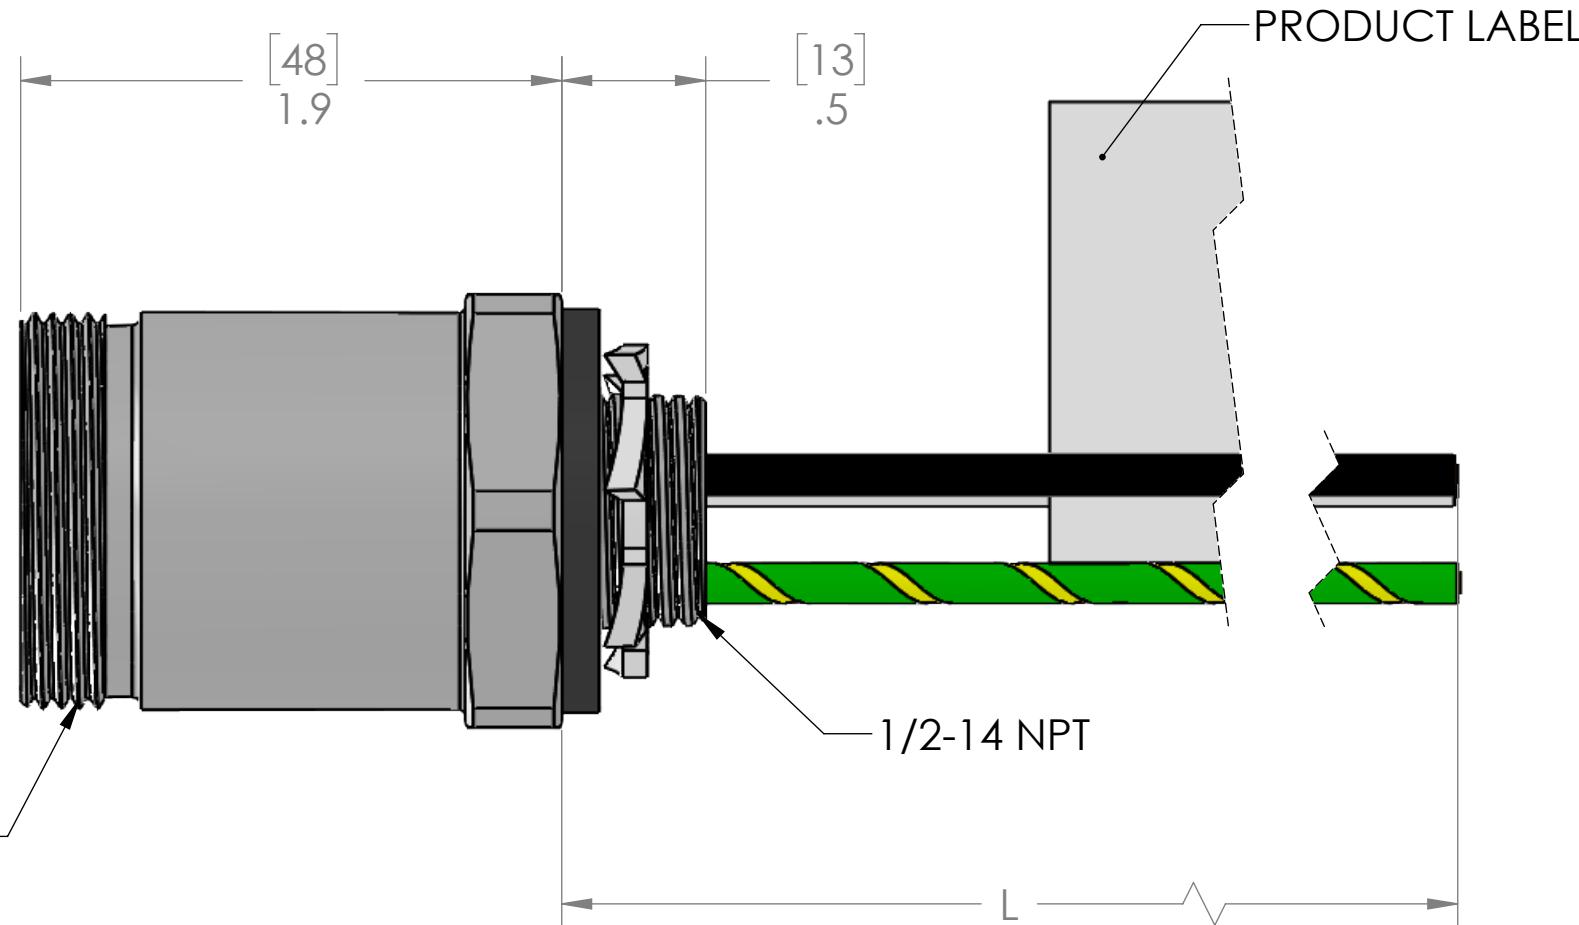

DEVICE IS INTENDED TO BE WIRED WITH
CONDUCTORS RATED AT 75°C OR HIGHER

MATERIALS	
SHELL:	NICKEL PLATED BRASS
CONTACTS:	GOLD PLATED COPPER ALLOY
WIRE:	
STYLE:	UL 1015
AWG:	14 AWG
JACKET:	PVC
VOLTAGE:	600V
INSERT:	BLACK PVC
O-RING:	BLACK TPE
NUT:	ZINC PLATED STEEL
RATINGS	
SCCR RATING:	65 kA Breakers and Fuses
RoHS COMPLIANT:	YES
PROTECTION:	IEC IP67
UL CATEGORY:	PVVA (US), PVVA7 (Canada)
U.S.:	UL 2237 LISTED, File E469485
CANADA:	C-UL 2237 LISTED, File E469485

CAUTION:
RISK OF ELECTRICAL SHOCK
DO NOT DISCONNECT UNDER LOAD

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

VOLTS 600V
AMPS 30A
TEMP: -40°C TO 90°C

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
AND [MM]
DRAWN BY JJH
DRAWN DATE 02/16/2024
CHECKED BY JJH
CHECK DATE 02/19/2024
COMMENTS:
MATERIAL
FINISH
DO NOT SCALE DRAWING

P/N	L
PMIN-34MR-0.3M	12" [0.3m]
PMIN-34MR-0.5M	20" [0.5m]
PMIN-34MR-1M	40" [1m]
PMIN-34MR-2M	79" [2m]
PMIN-34MR-3M	117" [3m]
PMIN-34MR-4M	157" [4m]
PMIN-34MR-5M	197" [5m]
PMIN-34MR-6M	236" [6m]
PMIN-34MR-8M	315" [8m]
PMIN-34MR-10M	393" [10m]

OTHER LENGTHS AVAILABLE
CONSULT FACTORY

MENCOM CORPORATION

TITLE:
3 PL MAL PMIN RCP 1/2
NPT

SIZE DWG. NO. REV
B PMIN-34MR-ZZ C
SCALE: 3:2 WEIGHT: SHEET 1 OF 1