


PIN #	COLOR
1	BLACK
2	GREEN/YELLOW
3	RED
4	WHITE

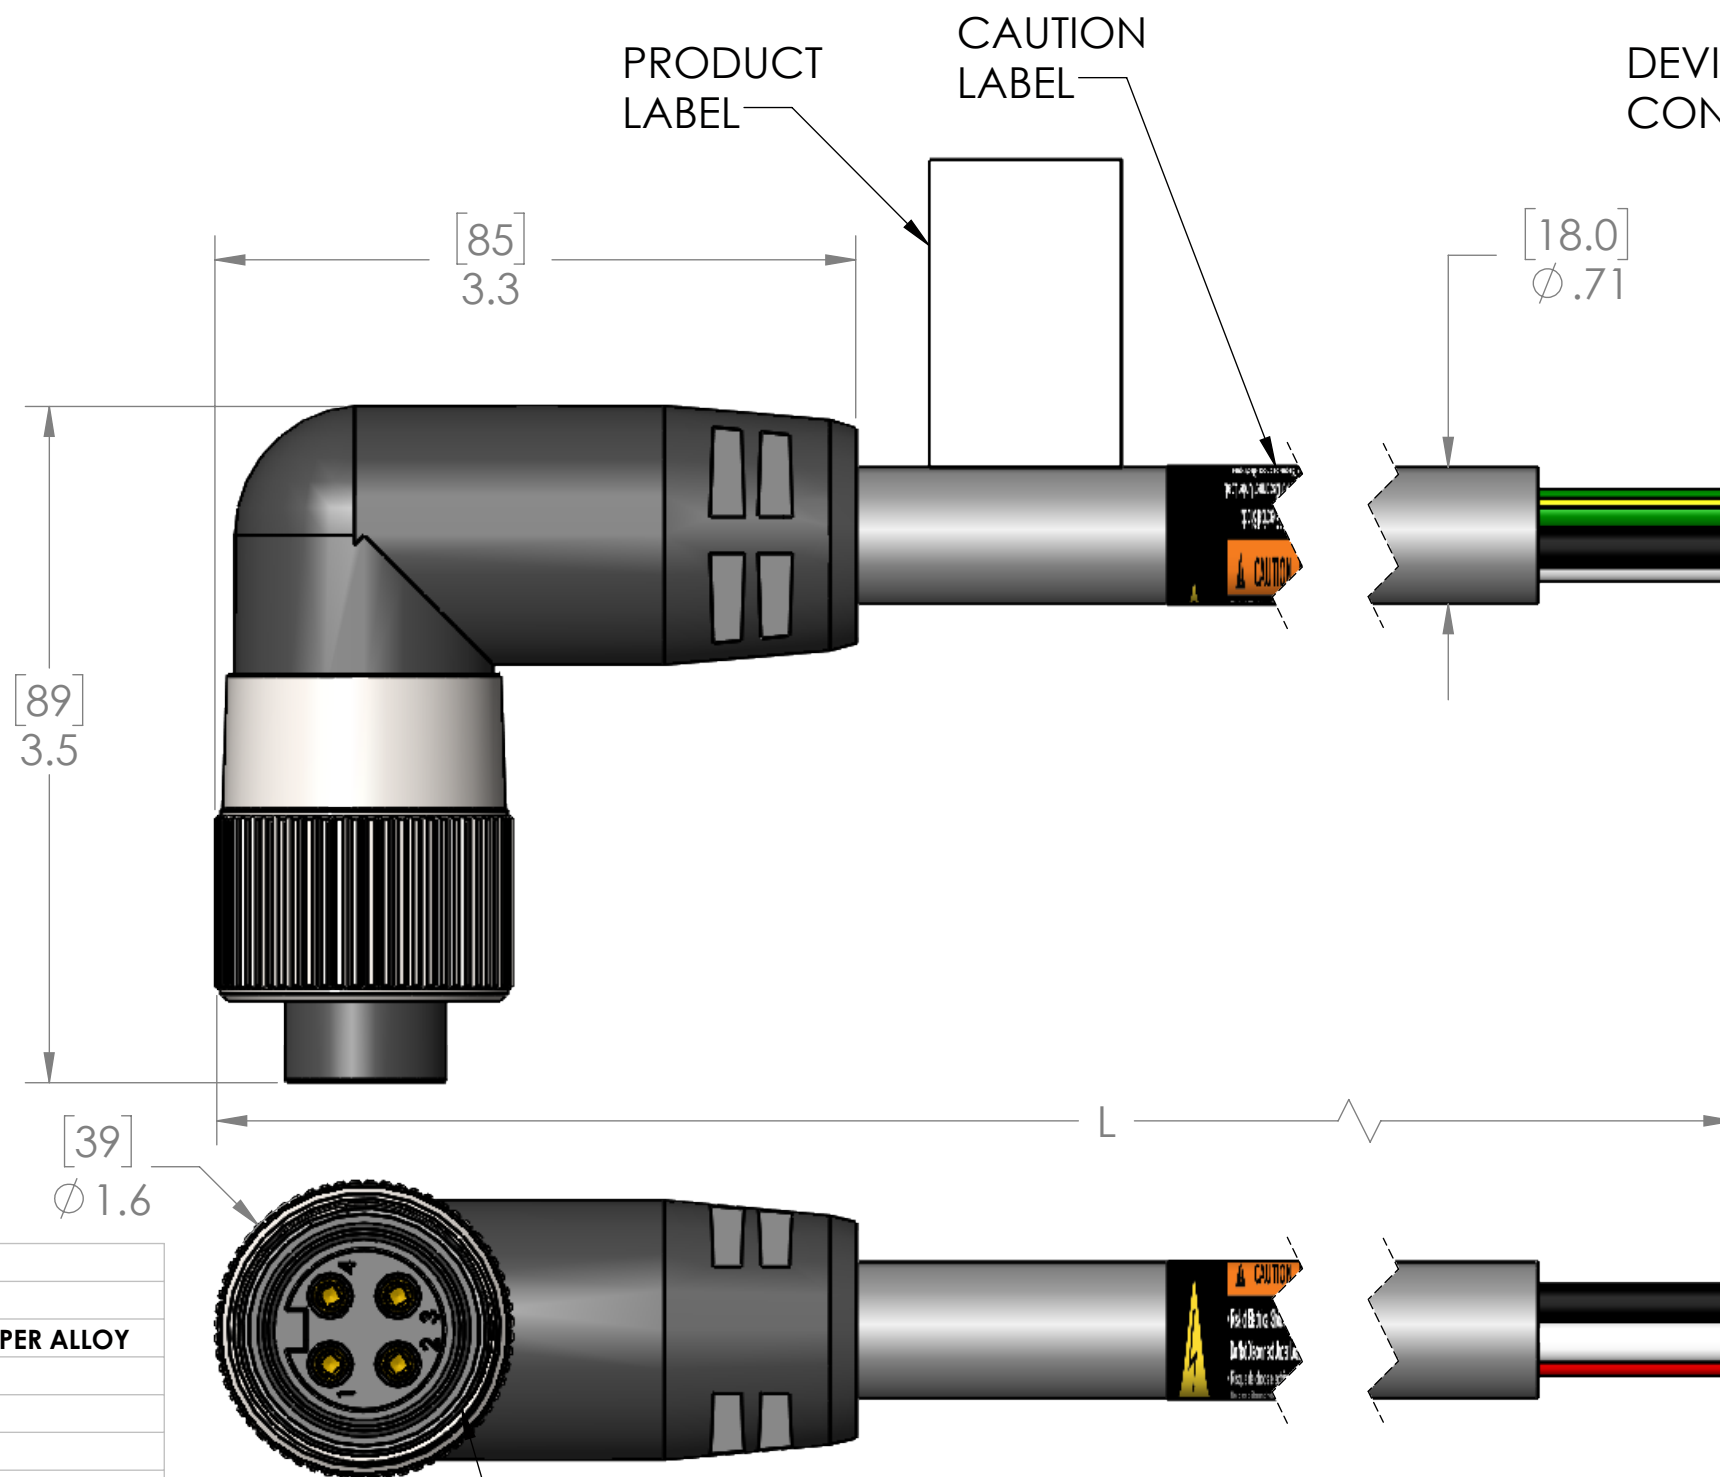

MATERIALS	
BODY:	BLACK PVC
CONTACTS:	GOLD PLATED COPPER ALLOY
CABLE:	
STYLE:	STOOW
AWG:	10 AWG
JACKET:	GRAY PVC
VOLTAGE:	600V
SHIELD:	NO
COUPLING:	NICKEL PLATED BRASS
INSERT:	BLACK PVC
RATINGS	
SCCR RATING:	65 kA Breakers and Fuses
RoHS COMPLIANT:	YES
PROTECTION:	IEC IP67
UL CATEGORY:	PVVA (US), PVVA7 (Canada)
U.S.:	UL 2237 LISTED, File E469485
CANADA:	C-UL 2237 LISTED, File E469485

1.375-16UN2B  
FEMALE  
THREAD

<b>CAUTION:</b>
<b>RISK OF ELECTRICAL SHOCK</b>
<b>DO NOT DISCONNECT UNDER LOAD</b>

<p><b>PROPRIETARY AND CONFIDENTIAL</b></p> <p>THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.</p>	VOLTS	600V
	AMPS	40A
	TEMP:	-40° to 90°C

UNLESS OTHERWISE SPECIFIED:  DIMENSIONS ARE IN INCHES AND [MM]	DRAWN BY	ADM
	DRAWN DATE	02/19/2024
	CHECKED BY	JJH
	CHECK DATE	02/20/2024
MATERIAL	COMMENTS:	
FINISH		
DO NOT SCALE DRAWING		

P/N	L	STD?
PMIN-40FP-1M-R	40" [1m]	YES
PMIN-40FP-2M-R	79" [2m]	YES
PMIN-40FP-3M-R	117" [3m]	NO
PMIN-40FP-4M-R	157" [4m]	NO
PMIN-40FP-5M-R	197" [5m]	YES
PMIN-40FP-6M-R	236" [6m]	NO
PMIN-40FP-8M-R	315" [8m]	NO
PMIN-40FP-10M-R	393" [10m]	YES
PMIN-40FP-15M-R	590" [15M]	YES

PARTS LISTED AS NOT BEING STANDARD  
MAY REQUIRE MINIMUM ORDERS  
OTHER LENGTHS AVAILABLE,  
PLEASE CONSULT FACTORY

MENCOM CORPORATION			
TITLE:  4 PL FEM R/A PLG PMIN 10AWG			
SIZE <b>B</b>	DWG. NO.  PMIN-40FP-ZZ-R		REV <b>C</b>
SCALE: 1:1	WEIGHT:		SHEET 1 OF 1