PIN #	COLOR
1	BLACK
2	GREEN/YELLOW
3	RED
4	WHITE

DEVICE IS INTENDED TO BE WIRED WITH CONDUCTORS RATED AT 75°C OR HIGHER

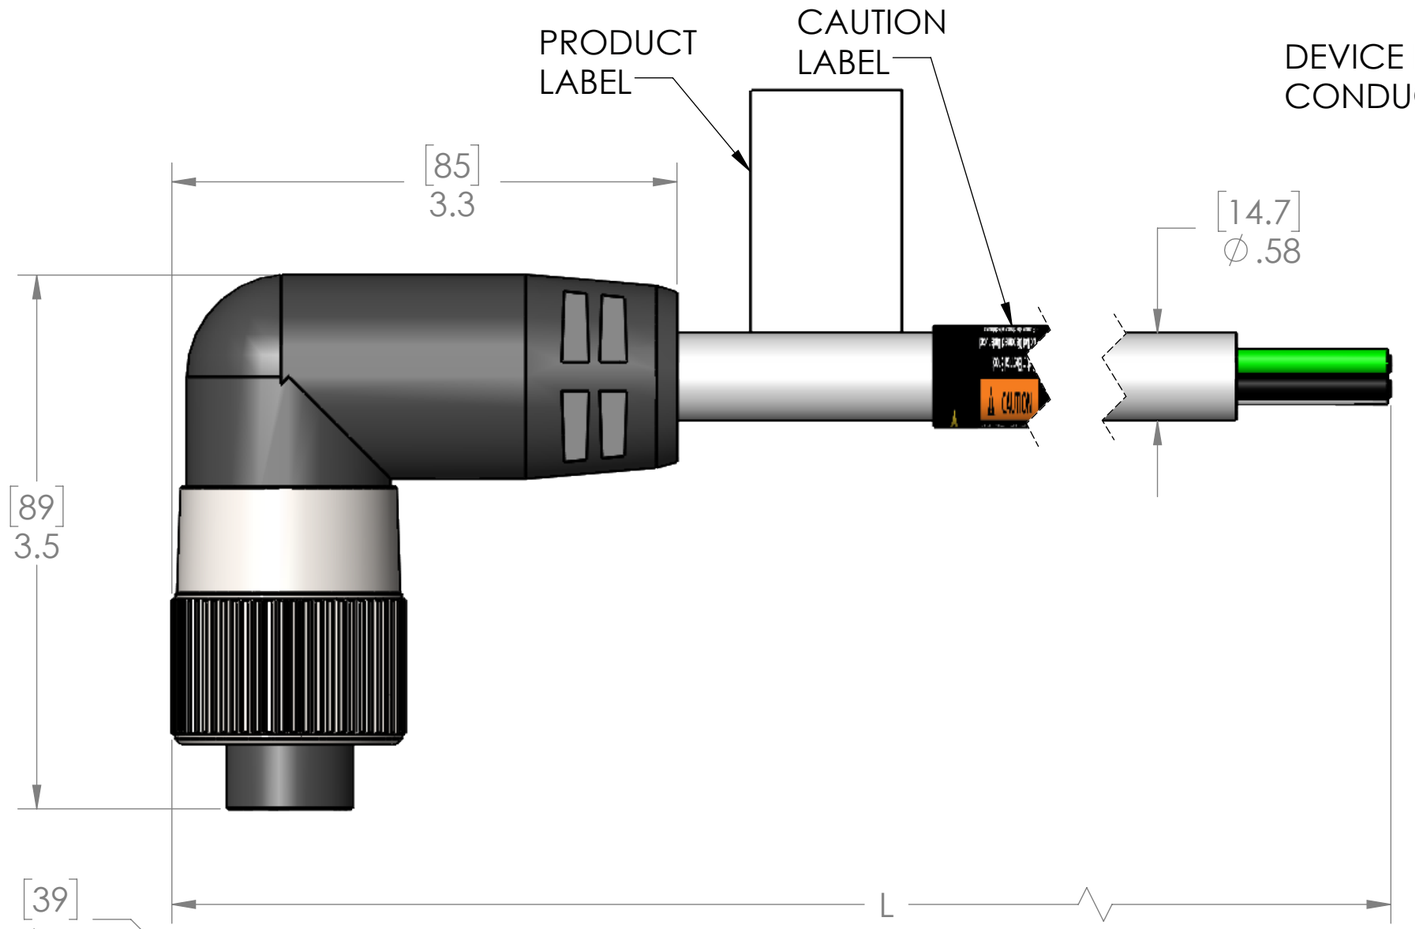

P/N	L	STD?
PMIN-44FP-1M-R	40" [1m]	YES
PMIN-44FP-2M-R	79" [2m]	YES
PMIN-44FP-3M-R	117" [3m]	NO
PMIN-44FP-4M-R	157" [4m]	NO
PMIN-44FP-5M-R	197" [5m]	YES
PMIN-44FP-6M-R	236" [6m]	NO
PMIN-44FP-8M-R	315" [8m]	NO
PMIN-44FP-10M-R	393" [10m]	YES
PMIN-44FP-15M-R	590" [15M]	YES

PARTS LISTED AS NOT BEING STANDARD MAY REQUIRE MINIMUM ORDERS
OTHER LENGTHS AVAILABLE,
PLEASE CONSULT FACTORY

MATERIALS	
BODY:	BLACK PVC
CONTACTS:	GOLD PLATED COPPER ALLOY
CABLE:	
STYLE:	STOOW
AWG:	14 AWG
JACKET:	GRAY PVC
VOLTAGE:	600V
SHIELD:	NO
COUPLING:	NICKEL PLATED BRASS
INSERT:	BLACK PVC
RATINGS	
SCCR RATING:	65 kA Breakers and Fuses
RoHS COMPLIANT:	YES
PROTECTION:	IEC IP67
UL CATEGORY:	PVVA (US), PVVA7 (Canada)
U.S.:	UL 2237 LISTED, File E469485
CANADA:	C-UL 2237 LISTED, File E469485

CAUTION:

RISK OF ELECTRICAL SHOCK
DO NOT DISCONNECT UNDER LOAD

VOLTS	600V
AMPS	24A
TEMP:	-40° to 90°C

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES AND [MM]
MATERIAL
FINISH
DO NOT SCALE DRAWING

DRAWN BY	ADM
DRAWN DATE	02/20/2024
CHECKED BY	JJH
CHECK DATE	02/20/2024

COMMENTS:

MENCOM CORPORATION

TITLE:
4 PL FEM R/A PLG PMIN 14AWG

SIZE	DWG. NO.	REV
B	PMIN-44FP-ZZ-R	C

SCALE: 1:1 | WEIGHT: | SHEET 1 OF 1