


В

MATERIALS		
BODY:	BLACK PVC	
CONTACTS:	GOLD PLATED COPPER ALLOY	
CABLE:		
STYLE:	STOOW 14 AWG GRAY PVC	
AWG:		
JACKET:		
VOLTAGE:	600V	
SHIELD:	NO	
COUPLING:	NICKEL PLATED BRASS	
INSERT:	BLACK PVC	
RATINGS		
SCCR RATING:	65 kA Breakers and Fuses	
RoHS COMPLIANT:	YES	
PROTECTION:	IEC IP67	
UL CATEGORY:	PVVA (US), PVVA7 (Canada)	
U.S.:	UL 2237 LISTED, File E469485	

C-UL 2237 LISTED, File E469485

7

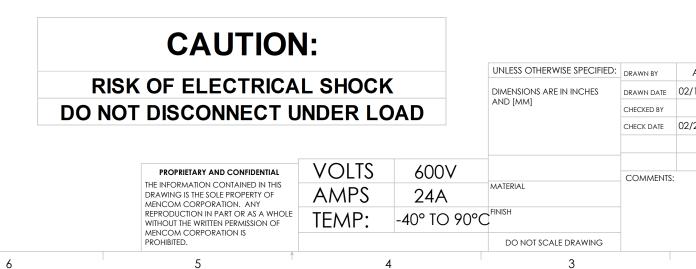

8

CANADA:

T-3/8-16UN2B					
	P/N	L	STD?		
	PMIN-44MFP-1M	40" [1m]	YES		
	PMIN-44MFP-2M	79" [2m]	YES		
I	PMIN-44MFP-3M	117" [3m]	NO		
	PMIN-44MFP-4M	157" [4m]	NO		
	PMIN-44MFP-5M	197" [5m]	YES		
	PMIN-44MFP-6M	236" [6m]	NO		
	PMIN-44MFP-8M	315" [8m]	NO		
	PMIN-44MFP-10M	393" [10m]	YES		
	PMIN-44MFP-15M	590" [15M]	YES		
PARTS LISTED AS NOT BEING STANDARD MAY REQUIRE MINIMUM ORDERS OTHER LENGTHS AVAILABLE, PLEASE CONSULT FACTORY					
ADM 02/19/2024	MENCOM CORPORATION				
JJH	TITLE:				
02/20/2024	4 PL M-F EXT PLG PMIN 14AWG				
S:	SIZE DWG. NO. REV				
	B PMIN-44MFP-ZZ C				
SCALE: 1:1.25 WEIGHT: SHEET 1 OF 1					
	2	1			

DEVICE IS INTENDED TO BE WIRED WITH CONDUCTORS RATED AT 75°C OR HIGHER

D