		WIRING		
CONN #1		CONN #2		CONN #3
1	---	1	---	2
2	---	2	---	1
3	---	3	---	3

DEVICE IS INTENDED TO BE WIRED WITH CONDUCTORS RATED AT 75°C OR HIGHER

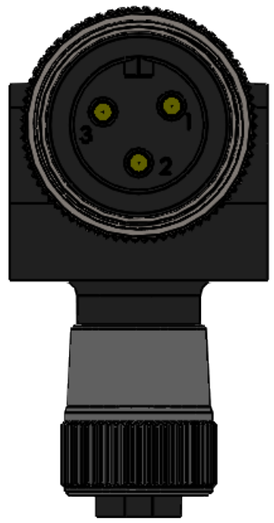

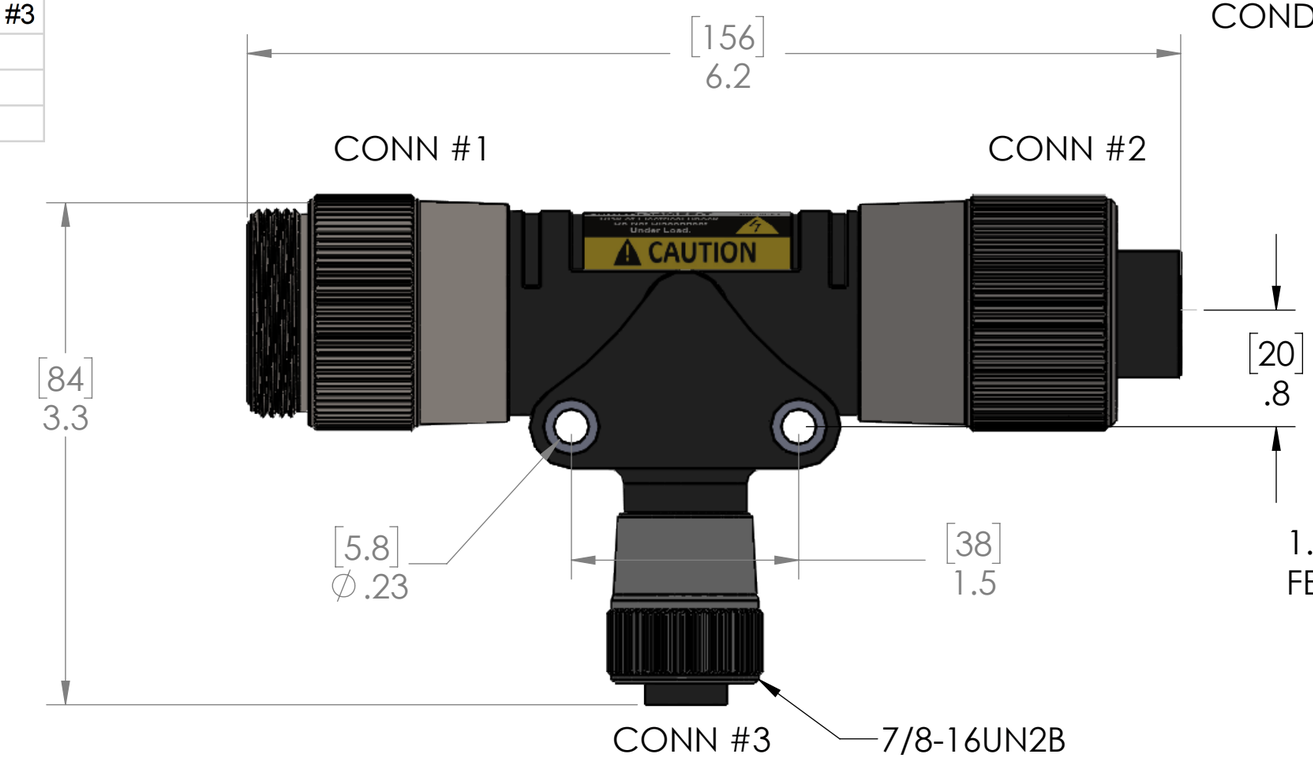

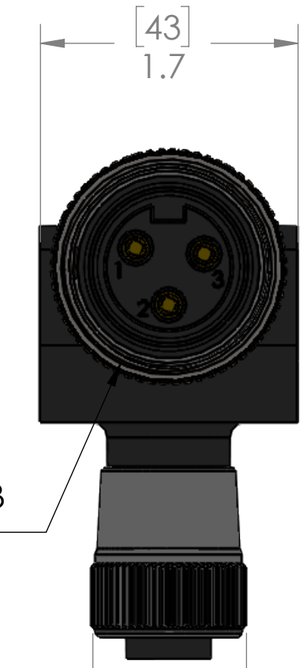

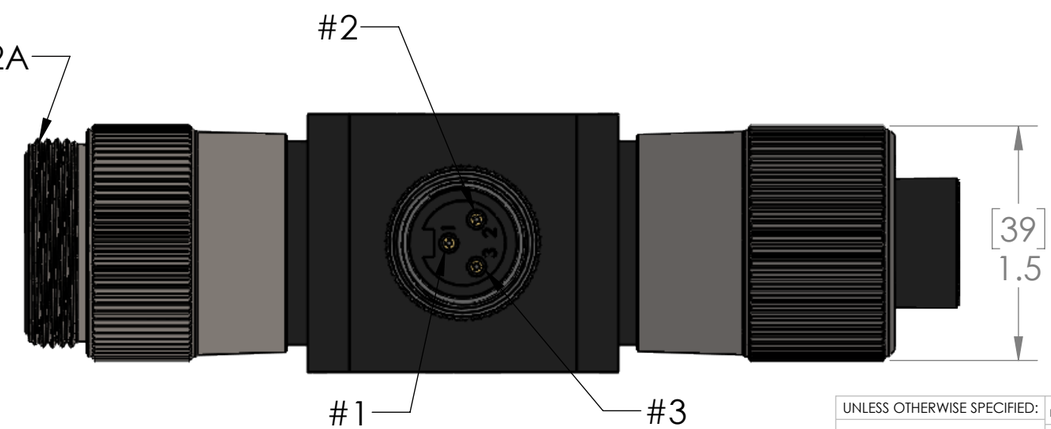

MATERIALS	
BODY:	BLACK PVC
CONTACTS:	GOLD PLATED COPPER ALLOY
INSERT:	BLACK PVC
COUPLING:	NICKEL PLATED BRASS
RATINGS:	
SCCR RATING:	5kA Breakers and Fuses
RoHS COMPLIANT:	Yes
PROTECTION:	IP67
UL CATEGORY:	PVVA (US), PVVA7 (Canada)
U.S.	UL 2237 LISTED, File E482233
CANADA	C-UL 2237 LISTED, File E482233

⚠ CAUTION:

RISK OF ELECTRICAL SHOCK
DO NOT DISCONNECT UNDER LOAD

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

VOLTS	600V
AMPS	42A/18A
TEMP:	-40°C-90°C

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES AND [MM]
MATERIAL
FINISH
DO NOT SCALE DRAWING

DRAWN BY	ADM
DRAWN DATE	04/21/2023
CHECKED BY	ADM
CHECK DATE	10/21/2019

COMMENTS:

MENCOM CORPORATION

TITLE:
3 POL M-F-F MIN T

SIZE	DWG. NO.	REV
B	PMINH-34MFF-T	C

SCALE: 1:1 | WEIGHT: | SHEET 1 OF 1