


WIRING		
PMIN		MIN
1	-----	2
2	-----	1
3	-----	3

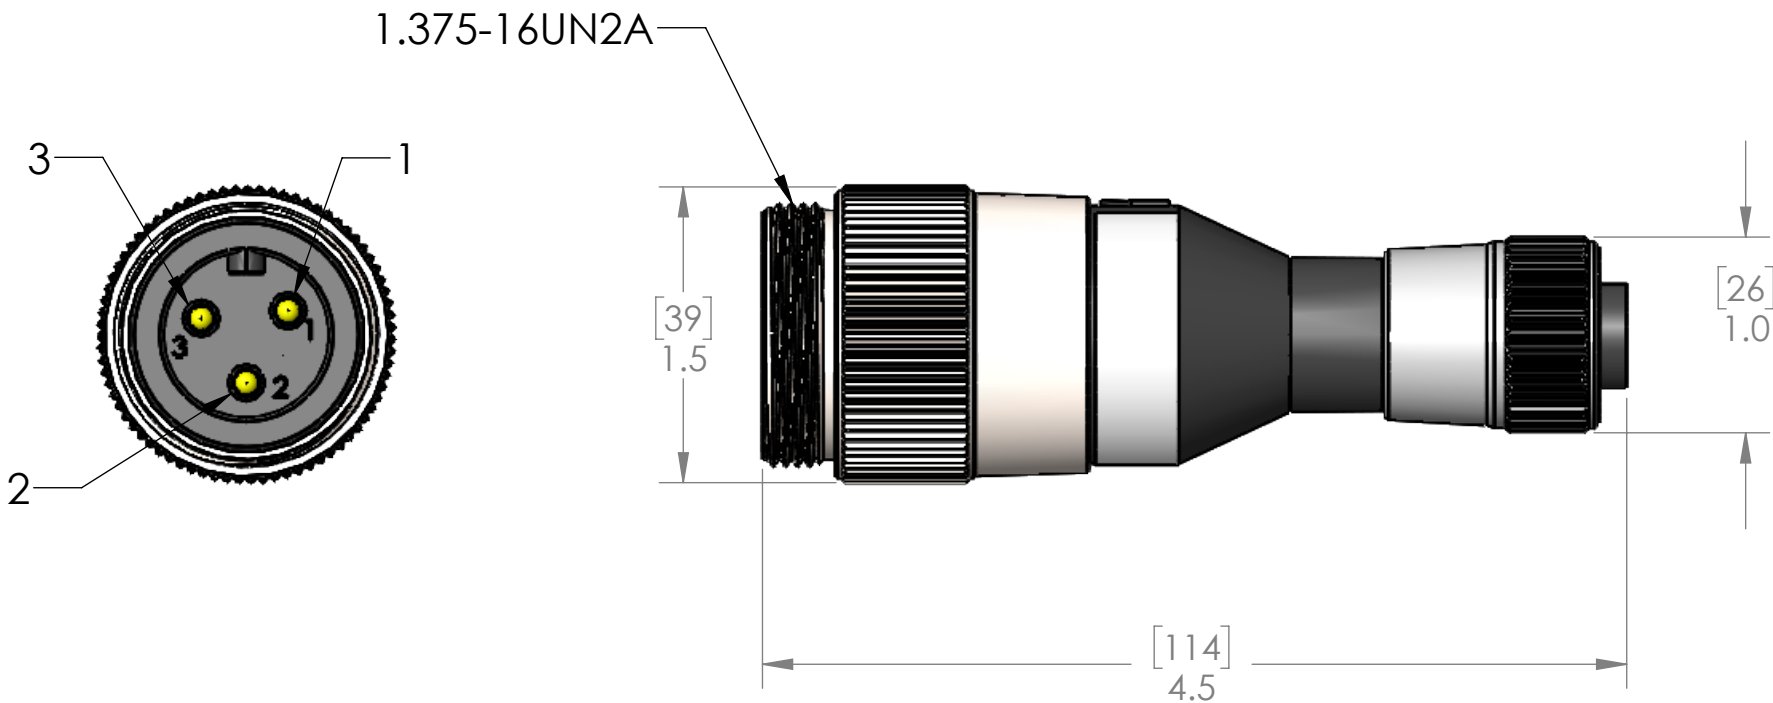

MATERIALS	
BODY:	BLACK PVC
INSERT:	BLACK PVC
CONTACTS:	GOLD PLATED COPPER ALLOY
COUPLING:	NICKEL PLATED BRASS

RATINGS:	
SCCR RATING:	65kA Breakers and Fuses
RoHS COMPLIANT:	Yes
PROTECTION:	IP67
UL CATEGORY:	PVVA (US), PVVA7 (Canada)
U.S.	UL 2237 LISTED, File E469485
CANADA	C-UL 2237 LISTED, File E469485

CAUTION:

RISK OF ELECTRICAL SHOCK

DO NOT DISCONNECT UNDER LOAD

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

VOLTS	600V
AMPS	18A
TEMP:	105°C
DO NOT SCALE DRAWING	

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MM]	DRAWN BY	ADM	MENCOM CORPORATION		
	DRAWN DATE	07/09/2020	TITLE: 3 PL PMIN MAL TO FEM MINH		
	CHECKED BY	RP			
	CHECK DATE	02/20/2024			
MATERIAL	COMMENTS:		SIZE	DWG. NO.	REV
FINISH			B	PMINH-3MFP-AD1	B
DO NOT SCALE DRAWING			SCALE: 1:1	WEIGHT:	SHEET 1 OF 1