


MALE	WIRING	FEMALE
PIN #		PIN #
1	-----	1
2	-----	2
3	-----	3

DEVICE IS INTENDED TO BE WIRED WITH CONDUCTORS RATED AT 75°C OR HIGHER



1-3/8-16UN2B
FEMALE THREAD

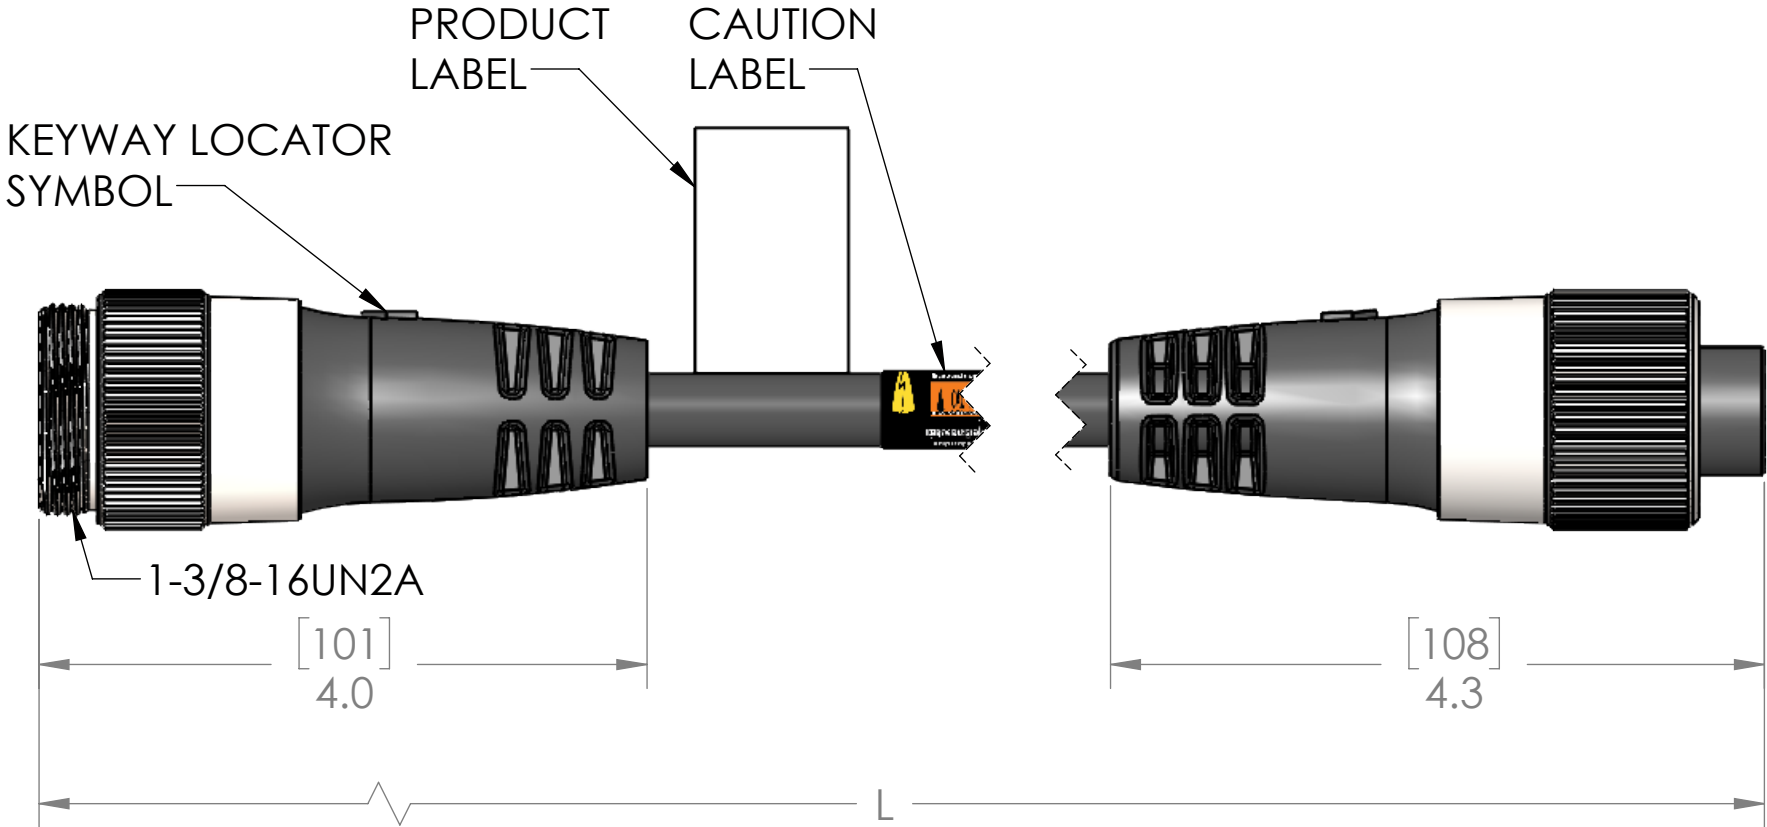

P/N	L
PMINW-30MFP-1M-C011	40" [1m]
PMINW-30MFP-2M-C011	79" [2m]
PMINW-30MFP-3M-C011	118" [3m]
PMINW-30MFP-4M-C011	157" [4m]
PMINW-30MFP-5M-C011	197" [5m]
PMINW-30MFP-10M-C011	393" [10m]
PMINW-30MFP-15M-C011	590" [15M]
PMINW-30MFP-20M-C011	787" [20M]

PARTS LISTED AS NOT BEING STANDARD
MAY REQUIRE MINIMUM ORDERS
OTHER LENGTHS AVAILABLE,
PLEASE CONSULT FACTORY

MATERIALS	
BODY:	BLACK PVC
CONTACTS:	GOLD PLATED COPPER ALLOY
CABLE:	
STYLE:	TC-ER
AWG:	10 AWG
JACKET:	BLACK PVC
VOLTAGE:	600V
SHIELD:	NO
COUPLING:	NICKEL PLATED BRASS
INSERT:	BLACK PVC
RATINGS	
SCCR RATING:	65 kA Breakers and Fuses
RoHS COMPLIANT:	YES
PROTECTION:	IEC IP67
UL CATEGORY:	PVVA (US), PVVA7 (Canada)
U.S.:	UL 2237 LISTED, File E469485
CANADA:	C-UL 2237 LISTED, File E469485

CAUTION:
RISK OF ELECTRICAL SHOCK
DO NOT DISCONNECT UNDER LOAD

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

VOLTS	600V
AMPS	42A
TEMP:	-40°C - 90°C

UNLESS OTHERWISE SPECIFIED:	DRAWN BY	ADM
DIMENSIONS ARE IN INCHES AND [MM]	DRAWN DATE	02/20/2024
	CHECKED BY	JJH
	CHECK DATE	02/20/2024
MATERIAL	COMMENTS:	
FINISH		
DO NOT SCALE DRAWING		

MENCOM CORPORATION		
TITLE:		
3 PL M-F EXT PLG PMIN 10AWG TPE		
SIZE	DWG. NO.	REV
B	PMINW-30MFP-ZZ-C011	C
SCALE: 1:1.25	WEIGHT:	SHEET 1 OF 1