


В

MATERIALS				
BODY:	BLACK PVC			
CONTACTS:	GOLD PLATED COPPER ALLOY			
CABLE:				
STYLE:				
AWG:				
JACKET:	BLACK TPE 600V			
VOLTAGE:				
SHIELD:	NO			
COUPLING:	NICKEL PLATED BRASS			
INSERT:	BLACK PVC			
RATINGS				
SCCR RATING:	65 kA Breakers and Fuses			
RoHS COMPLIANT:	YES			
PROTECTION:	IEC IP67			
UL CATEGORY:	PVVA (US), PVVA7 (Canada)			
U.S.:	UL 2237 LISTED, File E469485			

C-UL 2237 LISTED, File E469485

7

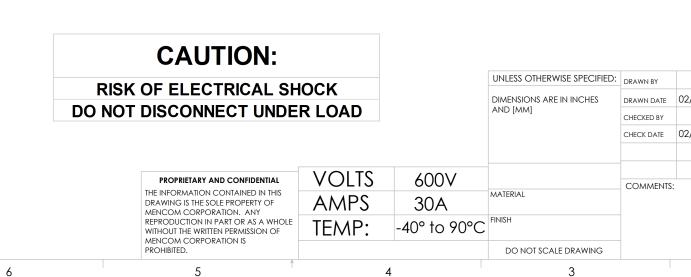

8

CANADA:

E IS INTENDED TO BE WIRED WITH							
UCTORS RATED AT 75°C OR HIGHER							

1

2

D

С

P/N						L	STD?	
PMINW-34FP-1M-C011			40"	YES				
PMINW-34FP-2M-C011			79"	YES				
PMINW-34FP-3M-C011			117" [3m] 157" [4m]		NO NO			
PMINW-34FP-4M-C011								
PMIN	1W-34	4FP	-5M-C	011	197"	[5m]	YES	
PMIN	W-34	4FP	-6M-C	011	236"	 [6m]	NO	
PMIN	W-34	4FP-	-8M-C	011	315"	[8m]	NO	
PMIN	W-34	4FP·	-10M-(C011	393"	[10m]	YES	
PMIN	W-34	4FP·	-15M-0	C011	590"	[15M]	YES	
PMIN	1W-34	4FP [.]	-20M-(C011	787"	[20M]	NO	
F	MA	ay r Oth	equir Er len	e min Gths				
ADM 21/2024	MENCOM CORPORATION							
JJH 21/2024	TITLE		3 PL I		PLG \WG	PMIN		
	size B					1101	REV	
SCALE: 1:1 WEIGHT:				1 -77-6				
	SCALE	: 1:1	WEIC	SHT:		오니트리	T 1 OF 1	