


В

MATERIALS	
BODY:	BLACK PVC
CONTACTS:	GOLD PLATED COPPER ALLOY
CABLE:	
STYLE:	TC-ER
AWG:	14 AWG
JACKET:	BLACK TPE
VOLTAGE:	600V
SHIELD:	NO
COUPLING:	NICKEL PLATED BRASS
INSERT:	BLACK PVC

RATINGS	
SCCR RATING:	65 kA Breakers and Fuses
<b>RoHS COMPLIANT:</b>	YES
PROTECTION:	IEC IP67
UL CATEGORY:	PVVA (US), PVVA7 (Canada)
U.S.:	UL 2237 LISTED, File E469485
CANADA:	C-UL 2237 LISTED, File E469485
8	7

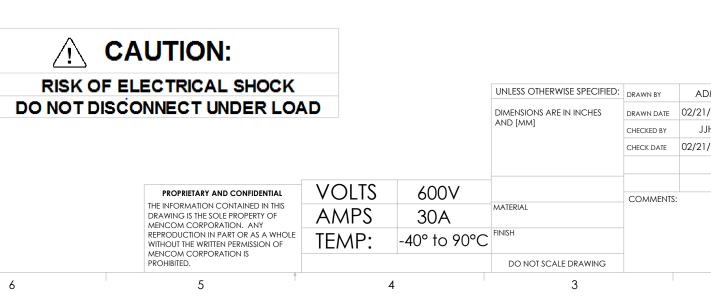

## DEVICE IS INTENDED TO BE WIRED WITH CONDUCTORS RATED AT 75°C OR HIGHER


1

D

С

-1-3/8-16UN2B FEMALE THREAD

2



P/I							
	N					_	STD?
PN	/INW	-34MF	P-1M-C0	11	40"	[1m]	YES
PN	MINW-34MFP-2M-C011 MINW-34MFP-3M-C011			79" [2m] 117" [3m]		YES	
PN						NO	
PN	/INW·	-34MF	P-4M-C0	11	157"	[4m]	NO
PN	/INW	-34MF	P-5M-C0	11	197"	[5m]	YES
PN	/INW	-34MF	P-6M-C0	11	236"	[6m]	NO
PN	/INW	-34MF	P-8M-C0	11	315"	[8m]	NO
PN	/INW	-34MF	P-10M-C	011	393"	[10m]	YES
PN	/INW	-34MF	P-15M-C	011	590"	[15M]	YES
M		OTH PLE/	er lengt Ase con	HS / SUL	T FAC	ABLE, ORY	?S
M '2024	<b>^</b>	OTH PLE/ MEN	ER LENGT	HS / SUL	AVAIL. I FACI	ABLE, ORY	?S
			er lengt Ase con COM ( L M-F E	THS A SUL CO	avail. 1 fact RPO	able, Ory RATIC PMII	rs DN
'2024 H	TITLE SIZE		er lengt Ase con COM ( L M-F E 14A'	THS A SUL CO	avail, i fact RPO PLG	able, Ory RATIC PMII	rs DN
'2024 H	TITLE		er lengt Ase con COM ( L M-F E 14A'	THS A SUL CO EXT WC	AVAIL FACT RPO PLG FTPE	able, Ory RATIC PMII	n N N

1

2