


MALE	WIRING	FEMALE
PIN #		PIN #
1	-----	1
2	-----	2
3	-----	3
4	-----	4



[39]
1.5

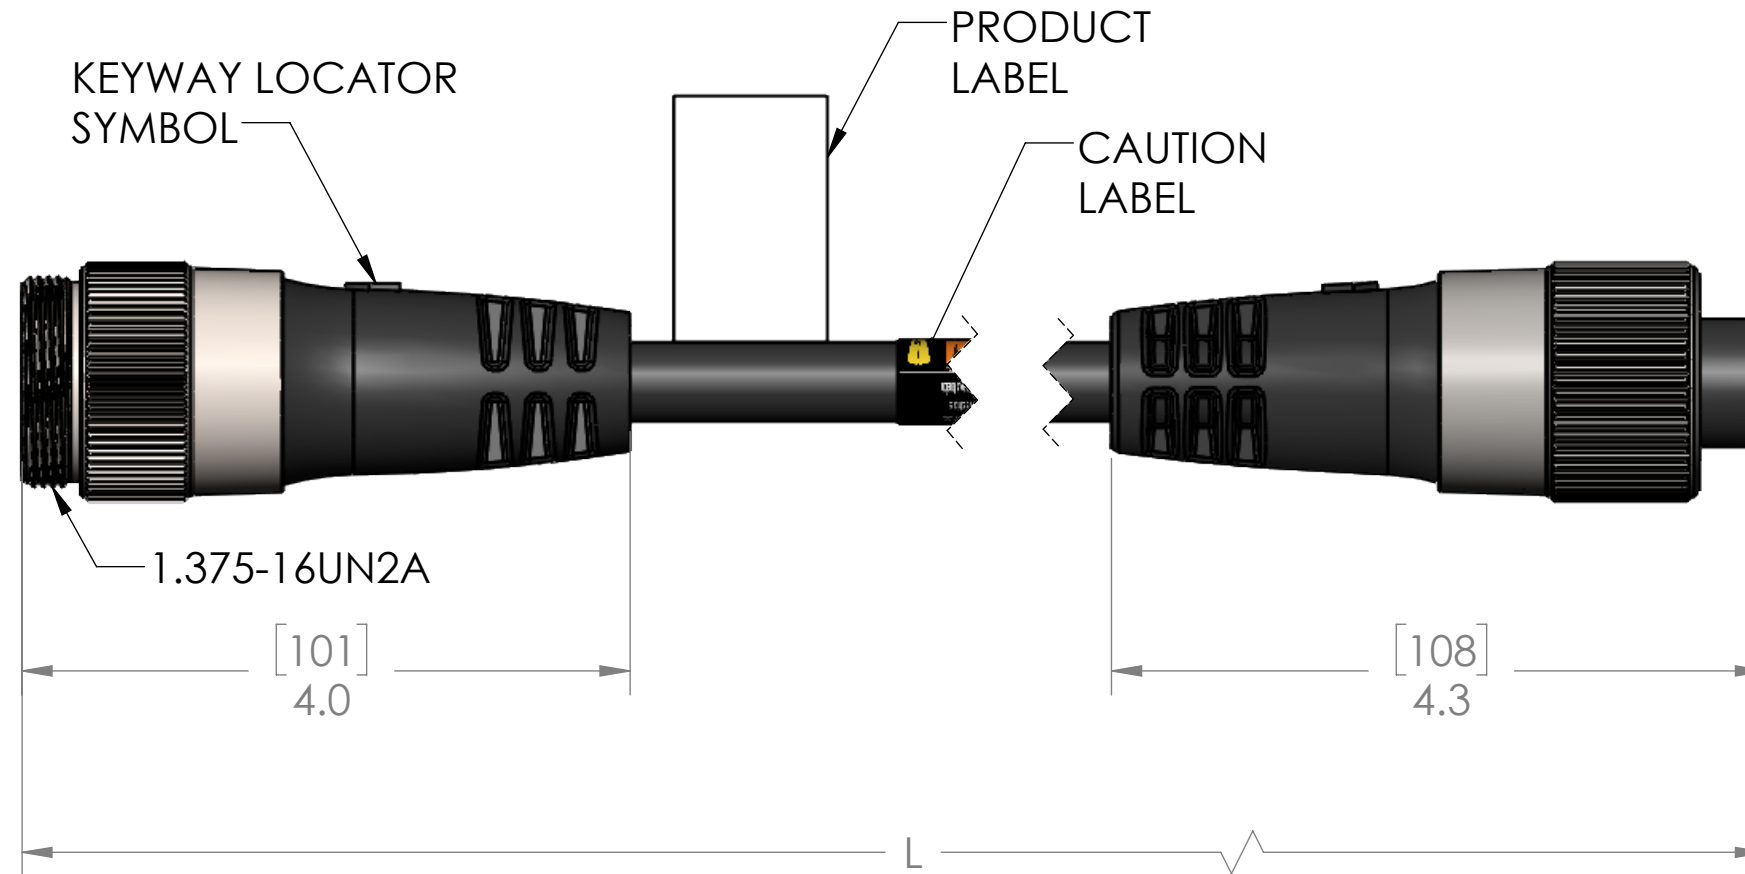

DEVICE IS INTENDED TO BE WIRED WITH
CONDUCTORS RATED AT 75°C OR HIGHER

1-3/8-16UN2B
FEMALE
THREAD



TABLE A		
P/N	L	STD?
PMINW-40MFP-0.3M-C011	12"[0.3M]	NO
PMINW-40MFP-1M-C011	40"[1M]	YES
PMINW-40MFP-1.5M-C011	59"[1.5M]	NO
PMINW-40MFP-2M-C011	79"[2M]	YES
PMINW-40MFP-3M-C011	118"[3M]	NO
PMINW-40MFP-4M-C011	157"[4M]	NO
PMINW-40MFP-5M-C011	197"[5M]	YES
PMINW-40MFP-6M-C011	236"[6M]	NO
PMINW-40MFP-8M-C011	315"[8M]	NO
PMINW-40MFP-10M-C011	393"[10M]	YES
PMINW-40MFP-15M-C011	590"[15M]	YES
PMINW-40MFP-20M-C011	786"[20M]	NO
PMINW-40MFP-25M-C011	983"[25M]	NO
PMINW-40MFP-30M-C011	1179"[30M]	NO

PARTS LISTED AS NOT BEING STANDARD
MAY REQUIRE MINIMUM ORDERS.
OTHER LENGTHS AVAILABLE, PLEASE CONSULT FACTORY

MENCOM CORPORATION

TITLE:

4 PL M-F EXT PLG PMIN
10AWG

SIZE B	DWG. NO. PMINW-40MFP-ZZ-C011	REV C
SCALE: 1:1	WEIGHT:	SHEET 1 OF 1

MATERIALS	
BODY:	BLACK PVC
CONTACTS:	GOLD PLATED COPPER ALLOY
CABLE:	
STYLE:	TC-ER
AWG:	10 AWG
JACKET:	BLACK TPE
VOLTAGE:	600V
SHIELD:	NO
COUPLING:	NICKEL PLATED BRASS
INSERT:	BLACK PVC
RATINGS	
SCCR RATING:	65 kA Breakers and Fuses
RoHS COMPLIANT:	YES
PROTECTION:	IEC IP67
UL CATEGORY:	PVVA (US), PVVA7 (Canada)
U.S.:	UL 2237 LISTED, File E469485
CANADA:	C-UL 2237 LISTED, File E469485

CAUTION:

RISK OF ELECTRICAL SHOCK

DO NOT DISCONNECT UNDER LOAD

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

VOLTS	600V
AMPS	40A
TEMP:	-40° TO 90°C

UNLESS OTHERWISE SPECIFIED:		DRAWN BY	ADM
DIMENSIONS ARE IN INCHES AND [MM]		DRAWN DATE	02/12/2024
		CHECKED BY	JJH
		CHECK DATE	06/23/2020
MATERIAL		COMMENTS:	
FINISH			
DO NOT SCALE DRAWING			