


DEVICE IS INTENDED TO BE WIRED WITH CONDUCTORS RATED AT 75°C OR HIGHER CAUTION PRODUCT LABEL-LABEL-






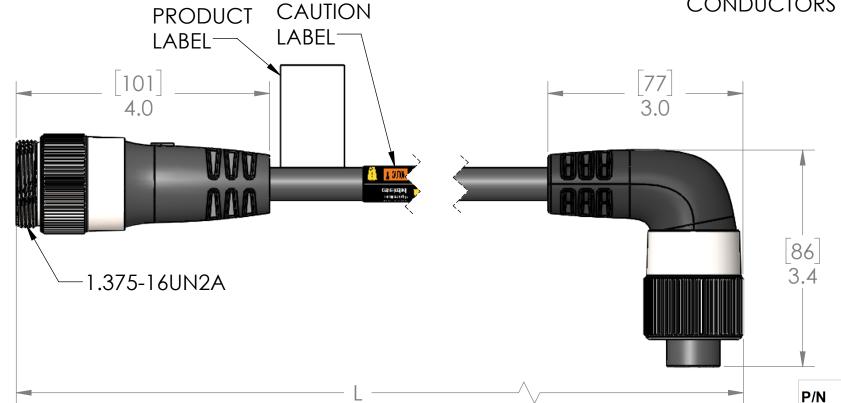

RATINGS SCCR RATING: 65 kA Breakers and Fuses YES ROHS COMPLIANT: IEC IP67 PROTECTION: PVVA (US), PVVA7 (Canada) **UL CATEGORY:** U.S.: UL 2237 LISTED, File E469485 CANADA: C-UL 2237 LISTED, File E469485

8

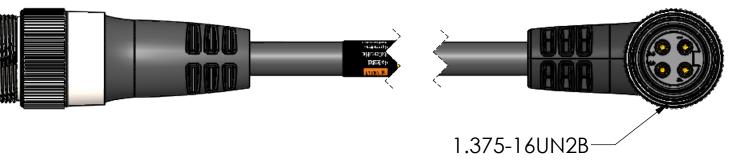

PARTS LISTED AS NOT BEING STANDARD MAY REQUIRE MINIMUM ORDERS OTHER LENGTHS AVAILABLE, PLEASE CONSULT FACTORY

PMINW-40MFRP-1M-C011

PMINW-40MFRP-2M-C011

PMINW-40MFRP-4M-C011

PMINW-40MFRP-3M-C011 | 117" [3m]

PMINW-40MFRP-6M-C011 236" [6m]

PMINW-40MFRP-8M-C011 315" [8m]

PMINW-40MFRP-5M-C011 | 197" [5m] | YES

PMINW-40MFRP-10M-C011 393" [10m] YES

PMINW-40MFRP-15M-C011 590" [15M] YES

CAUTION:

RISK OF ELECTRICAL SHOCK DO NOT DISCONNECT UNDER LOAD

PROPRIETARY AND CONFIDENTIAL	VO	
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF	AM	
MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF	TFN	
MENCOM CORPORATION IS		

	VOLTS	600V
	AMPS	40A
LE	TEMP:	-40°C to 90°C
		·

	DIMENSIONS ARE IN INCHES	DRAWN DATE	02/21/2024	
	AND [MM]	CHECKED BY	JJH	-
		CHECK DATE	02/21/2024	
MATERIAL	COMMENTS:		S	
	FINISH			
				_

UNLESS OTHERWISE SPECIFIED: DRAWN BY

DO NOT SCALE DRAWING

MENCOM CORPORATION

D

STD?

YES

YES

NO

NO

REV

SHEET 1 OF 1

40" [1m]

79" [2m]

157" [4m]

TITLE:

SCALE: 1:1.5

JJH

4 PL R/A M-F EXT PLG PMIN 10AWG TPE

SIZE DWG. NO. PMINW-40MFRP-ZZ-C011

WEIGHT:

3