


PIN #	COLOR
1	BLACK
2	GREEN / YELLOW
3	RED
4	WHITE

DEVICE IS INTENDED TO BE WIRED WITH
CONDUCTORS RATED AT 75°C OR HIGHER

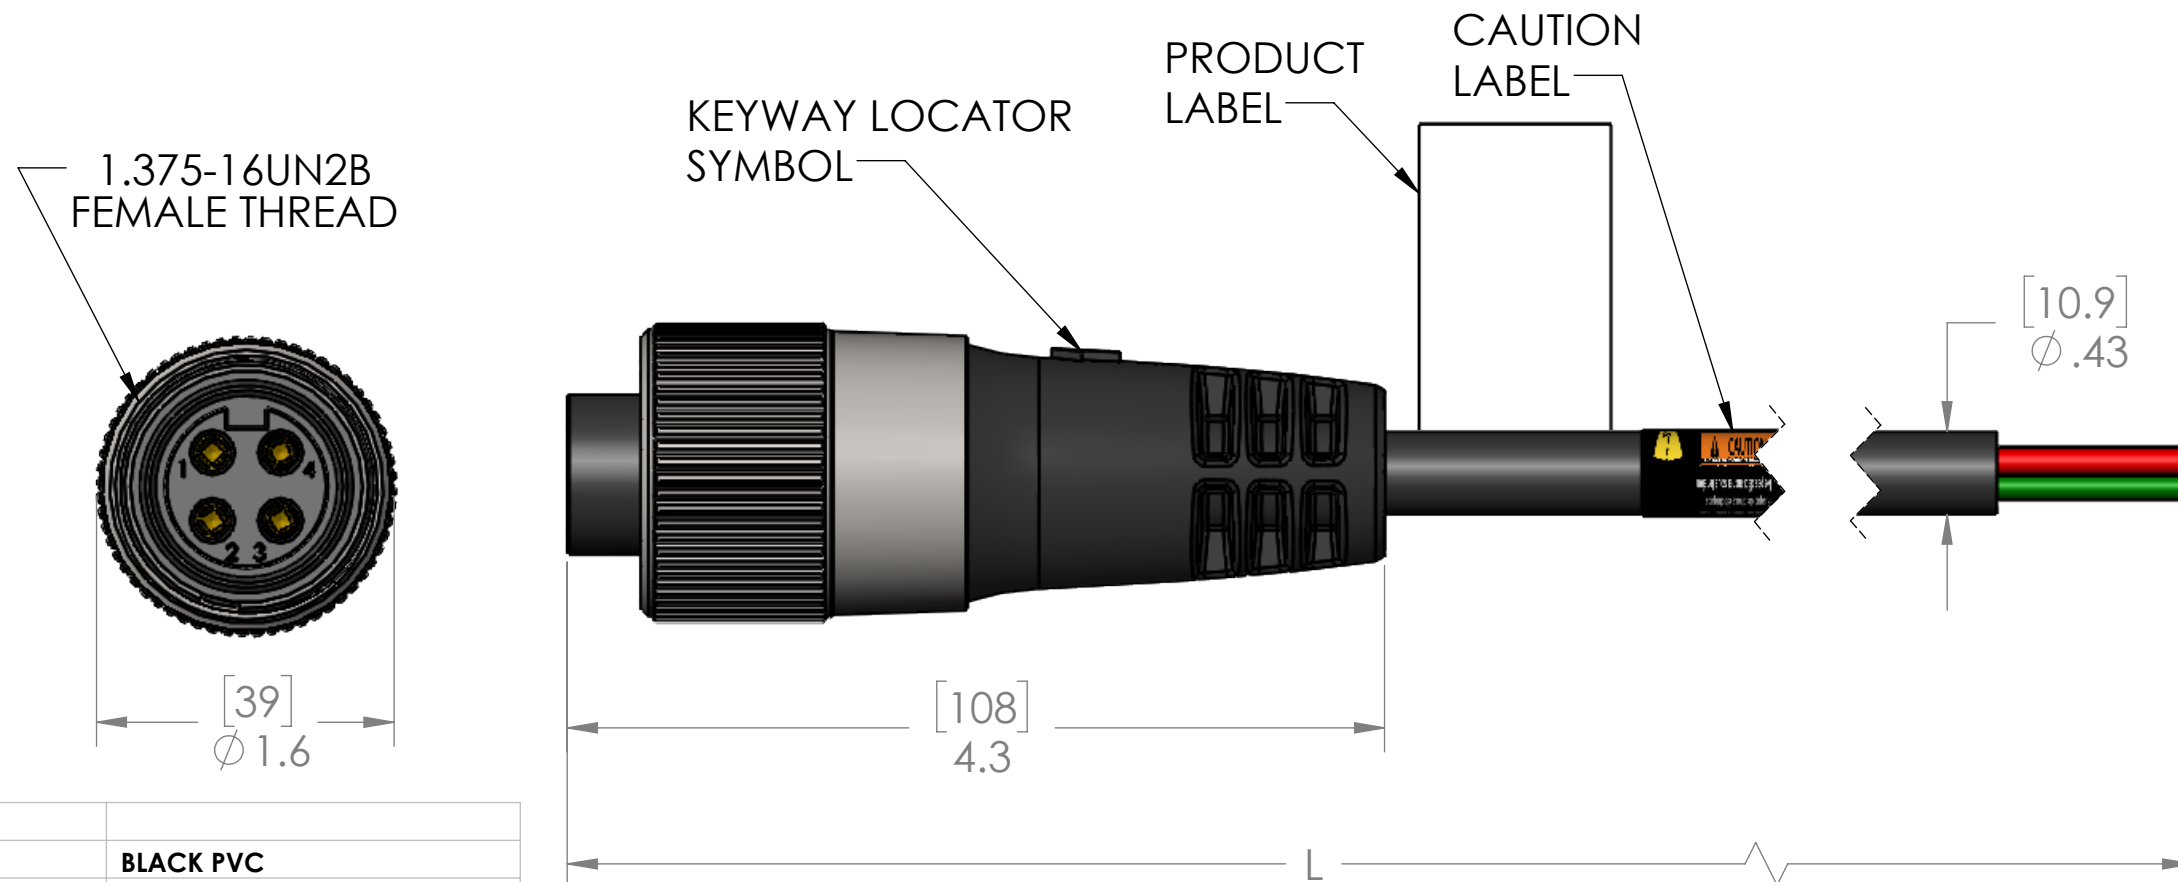

MATERIALS	
BODY:	BLACK PVC
CONTACTS:	GOLD PLATED COPPER ALLOY
CABLE:	
STYLE:	TC-ER
AWG:	12 AWG
JACKET:	BLACK TPE
VOLTAGE:	600V
SHIELD:	NO
COUPLING:	NICKEL PLATED BRASS
INSERT:	BLACK PVC
RATINGS	
SCCR RATING:	65 kA Breakers and Fuses
RoHS COMPLIANT:	YES
PROTECTION:	IEC IP67
UL CATEGORY:	PVVA (US), PVVA7 (Canada)
U.S.:	UL 2237 LISTED, File E469485
CANADA:	C-UL 2237 LISTED, File E469485

CAUTION:
RISK OF ELECTRICAL SHOCK
DO NOT DISCONNECT UNDER LOAD

<p>PROPRIETARY AND CONFIDENTIAL</p> <p>THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.</p>	VOLTS	600V
	AMPS	30A
	TEMP:	-40° to 90°C

UNLESS OTHERWISE SPECIFIED:	DRAWN BY	ADM
DIMENSIONS ARE IN INCHES AND [MM]	DRAWN DATE	02/21/2024
	CHECKED BY	JJH
	CHECK DATE	02/21/2024
MATERIAL	COMMENTS:	
FINISH		
DO NOT SCALE DRAWING		

P/N	L	STD?
PMINW-42FP-1M-C011	40" [1m]	YES
PMINW-42FP-2M-C011	79" [2m]	YES
PMINW-42FP-3M-C011	117" [3m]	NO
PMINW-42FP-4M-C011	157" [4m]	NO
PMINW-42FP-5M-C011	197" [5m]	YES
PMINW-42FP-6M-C011	236" [6m]	NO
PMINW-42FP-8M-C011	315" [8m]	NO
PMINW-42FP-10M-C011	393" [10m]	YES
PMINW-42FP-15M-C011	590" [15M]	YES
PMINW-42FP-20M-C011	787" [20M]	NO

PARTS LISTED AS NOT BEING STANDARD
MAY REQUIRE MINIMUM ORDERS
OTHER LENGTHS AVAILABLE,
PLEASE CONSULT FACTORY

MENCOM CORPORATION			
TITLE: 4 PL FEM PLG PMIN 12AWG			
SIZE B	DWG. NO. PMINW-42FP-ZZ-C011		REV C
SCALE: 1:1		WEIGHT:	SHEET 1 OF 1