
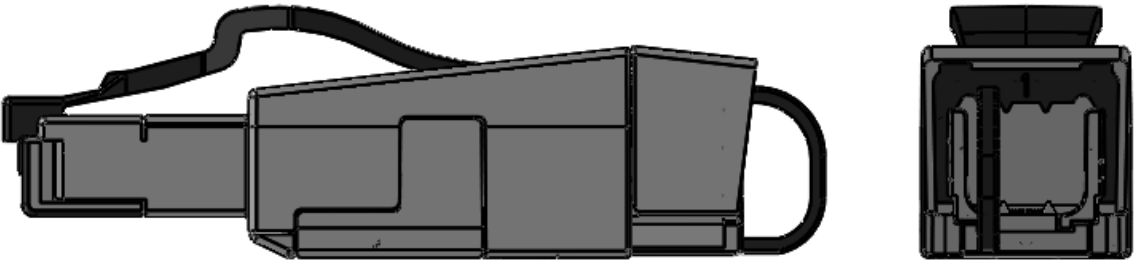
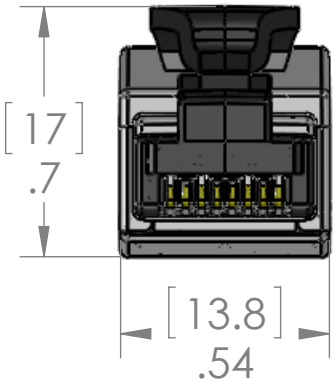


Attributes:

- Cat 6A class EA RJ45 plug for field assembly without special tools
- Zinc diecast housing provides full shielding
- Acceptable wire size:
 - Stranded: 27/7 to 22/7, wire dia of 0.46 to 0.76mm
 - Solid: 26/1 to 22/1, wire dia of 0.40 to 0.64mm
- Transmission Characteristics to Cat 6A per ISO/IEC 11801 Ed 2.2:2011-06
- Compliance to class EA per ISO/IEC 11801 Ed 2.2:2011-06 and DIN EN 50173-1:2011-09
- 10GBit per IEEE 802.3an
- Suitable for power over ethernet (PoE, PoE plus and UPoE)
- Cable jacket diameters of 5.5 - 10.5mm
- Degree of protection: IP20
- May be re-terminated if necessary

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	DRAWN IN SW	9/24/2014	JJH

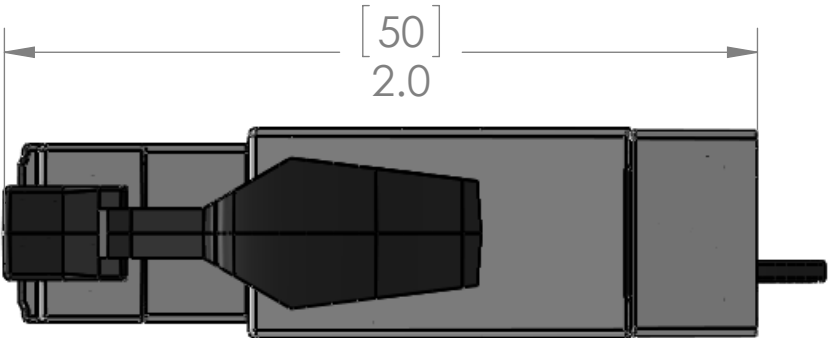

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MM]			NAME	MENCOM CORPORATION	
		DRAWN	BEM		
		CHECKED			
		ENG APPR.			
		MFG APPR.			
		Q.A.		TITLE:	
		COMMENTS:			
MATERIAL				SIZE	DWG. NO.
FINISH				B	RJ45-PN-FW
DO NOT SCALE DRAWING				SCALE: 2:1	REV A
				WEIGHT:	SHEET 1 OF 1