



PANEL CUTOUT

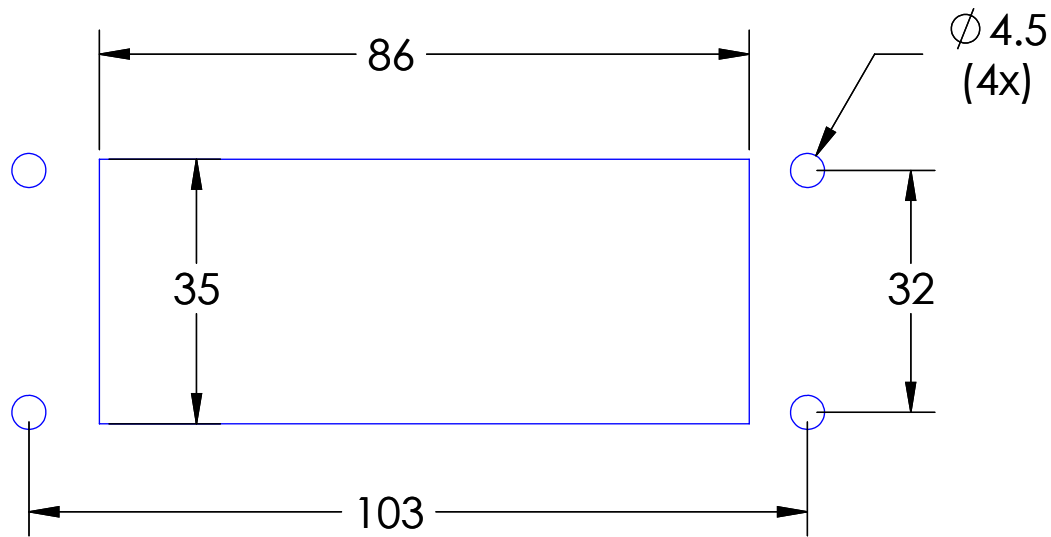

SEAL RATING OF IP 66/69 ONLY ACHIEVED WHEN FULLY LATCHED TO MATING HOOD AND WITH AN APPROPRIATE SEALING GLAND INSTALLED

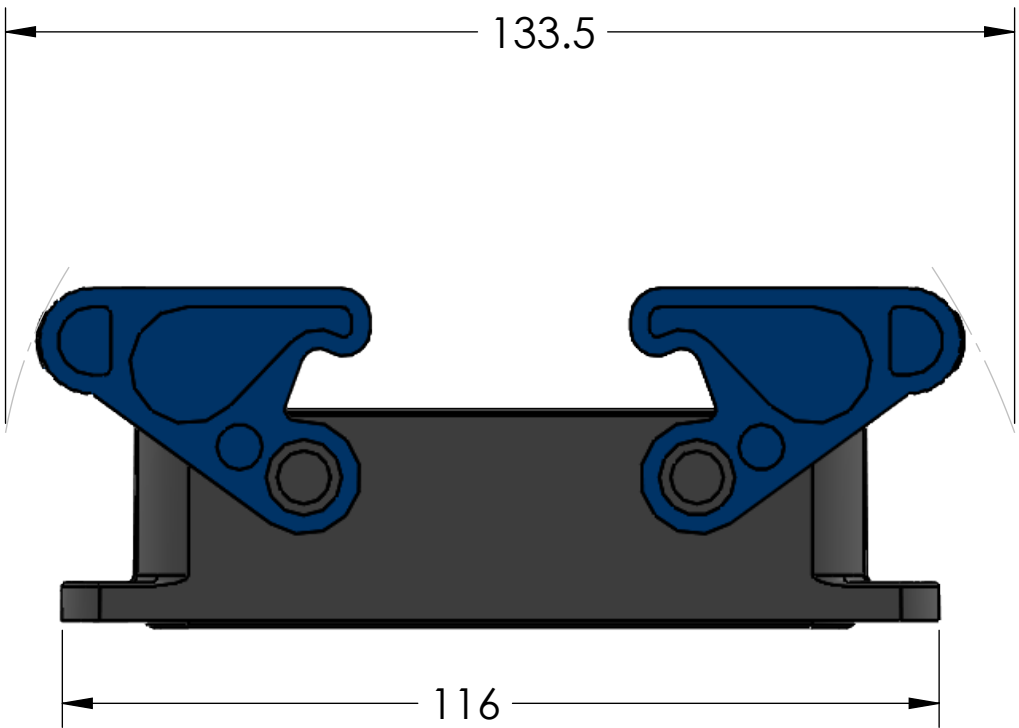

HYGENIC ENCLOSURE T-TYPE / VERSION  
BULKHEAD MOUNTED HOUSING W/ SINGLE LEVER

TECHNICAL DATA	
OPERATING TEMP RANGE:	-40°C to +70°C
MATERIAL:	THERMOPLASTIC
LEVERS:	THERMOPLASTIC
GASKET:	HNBR
IP DEGREE OF PROTECTION;	IP66/IP69

UNLESS OTHERWISE SPECIFIED:	DRAWN BY	JJH
DIMENSIONS ARE IN MM TOLERANCES: FRACTIONAL ±1/64 ANGULAR: MACH ±3° BEND ±5° ONE PLACE DECIMAL ±.2 TWO PLACE DECIMAL ±.1	DRAWN DATE	07/03/2019
	CHECKED BY	ADM
	CHECK DATE	07/03/2019
	COMMENTS:	
MATERIAL		
FINISH		
DO NOT SCALE DRAWING		

PROPRIETARY AND CONFIDENTIAL  
THE INFORMATION CONTAINED IN THIS  
DRAWING IS THE SOLE PROPERTY OF  
MENCOM CORPORATION. ANY  
REPRODUCTION IN PART OR AS A WHOLE  
WITHOUT THE WRITTEN PERMISSION OF  
MENCOM CORPORATION IS  
PROHIBITED.

MENCOM CORPORATION			
TITLE:			
SIZE	DWG. NO.		REV
B	THIH-16		A
SCALE: 1:1		WEIGHT:	SHEET 1 OF 1