
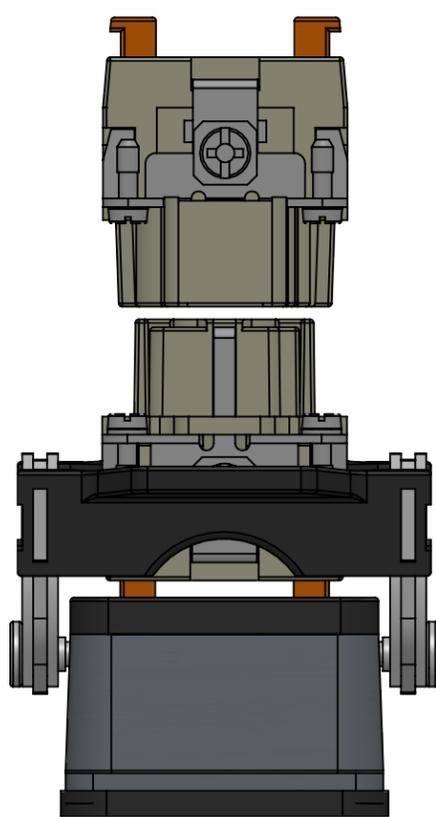
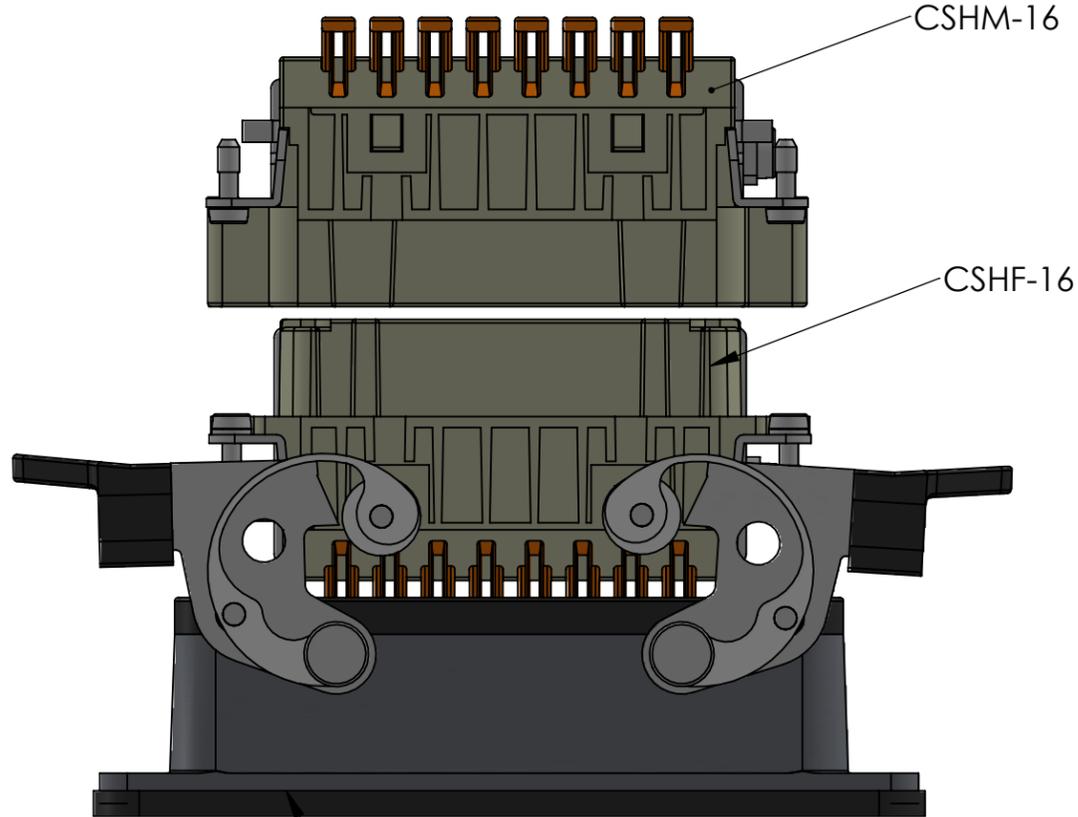
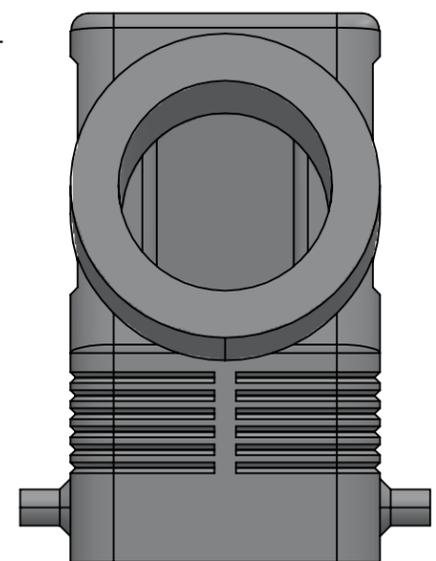


8 7 6 5 4 3 2 1

D
C
B
A

D
C
B
A

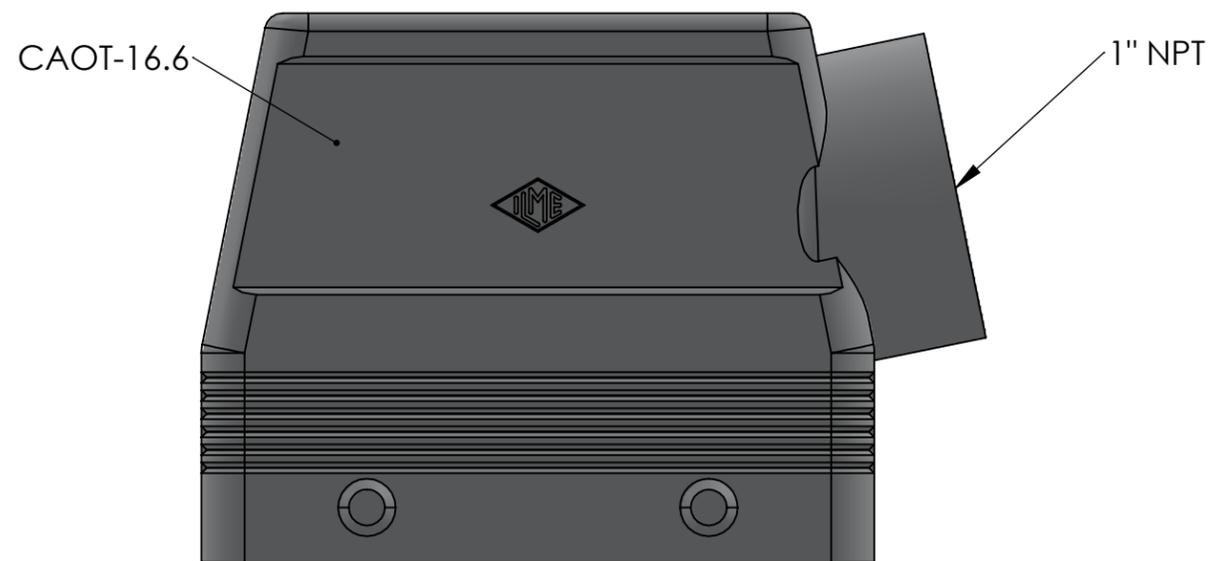

The Enclosures ensure IP66 protection rating when mated and locked with the closing levers.

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:	DRAWN BY	GO
DIMENSIONS ARE IN INCHES AND [MM]	DRAWN DATE	10/24/2019
	CHECKED BY	
	CHECK DATE	
	COMMENTS:	
MATERIAL		
FINISH		
DO NOT SCALE DRAWING		

Certifications	
(under individual component part numbers)	
US:	UL Recognized
Canada:	C-UL Recognized
Europe:	CE
China:	CCC

MATERIALS	
BODY:	EPOXY COATED DIE CAST ALUMINUM
GASKET:	THERMOPLASTIC ELASTOMER
HANDLE:	POLYAMIDE
LEVERS:	STAINLESS STEEL
INSERTS:	GLASS REINFORCED THERMOPLASTIC
CONTACTS:	SILVER PLATED COPPER ALLOY
MENCOM CORPORATION	
TITLE: 16 PL ILME KIT	
SIZE	DWG. NO.
B	TQDS-16IOA10
SCALE: 1:2	WEIGHT:
	SHEET 1 OF 1

8 7 6 5 4 3 2 1