
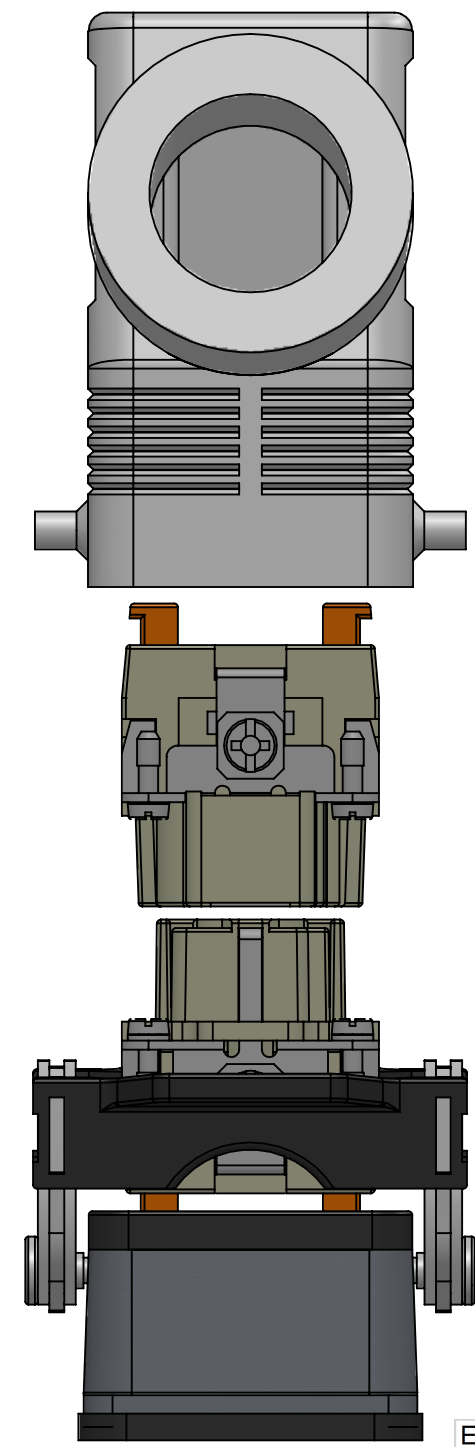
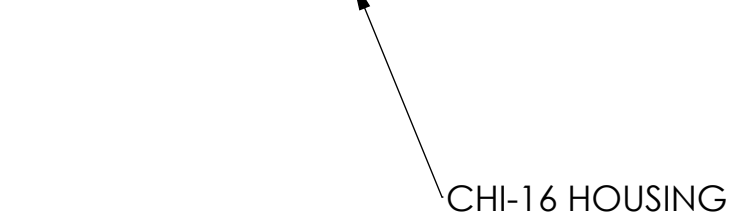
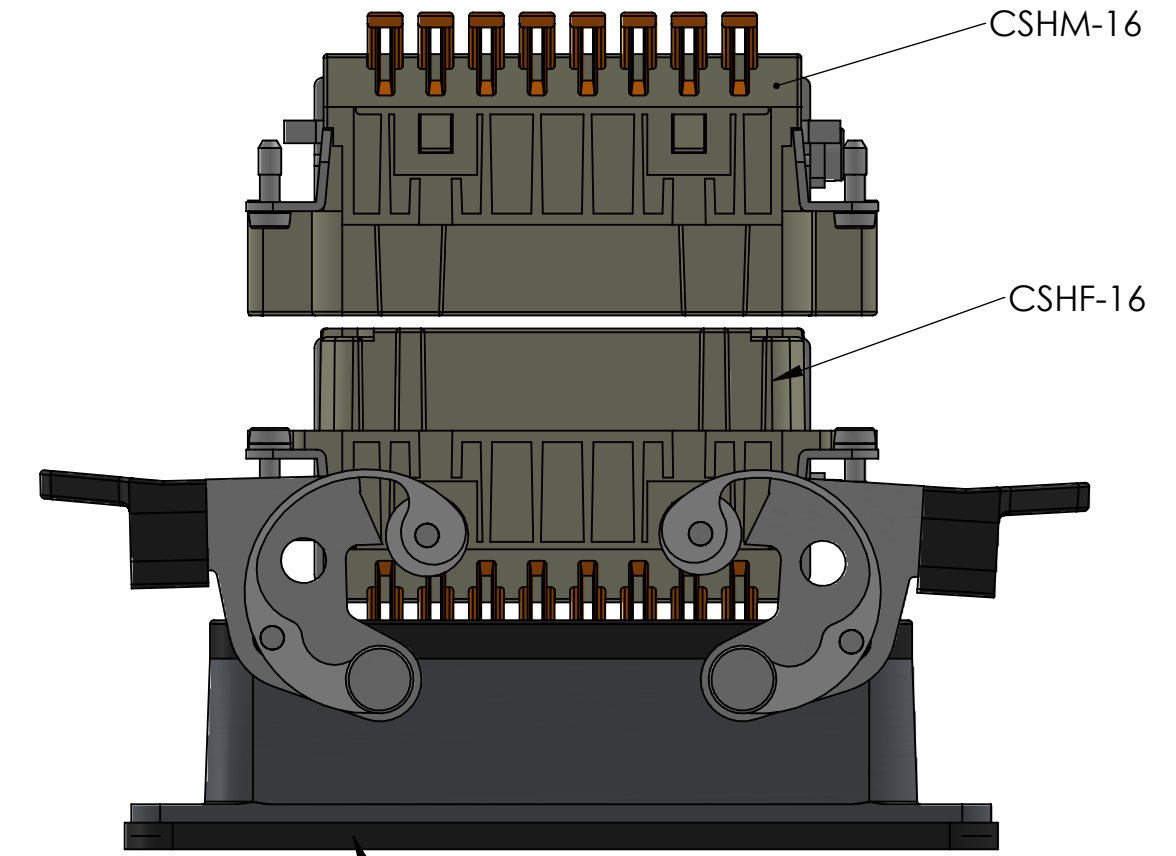


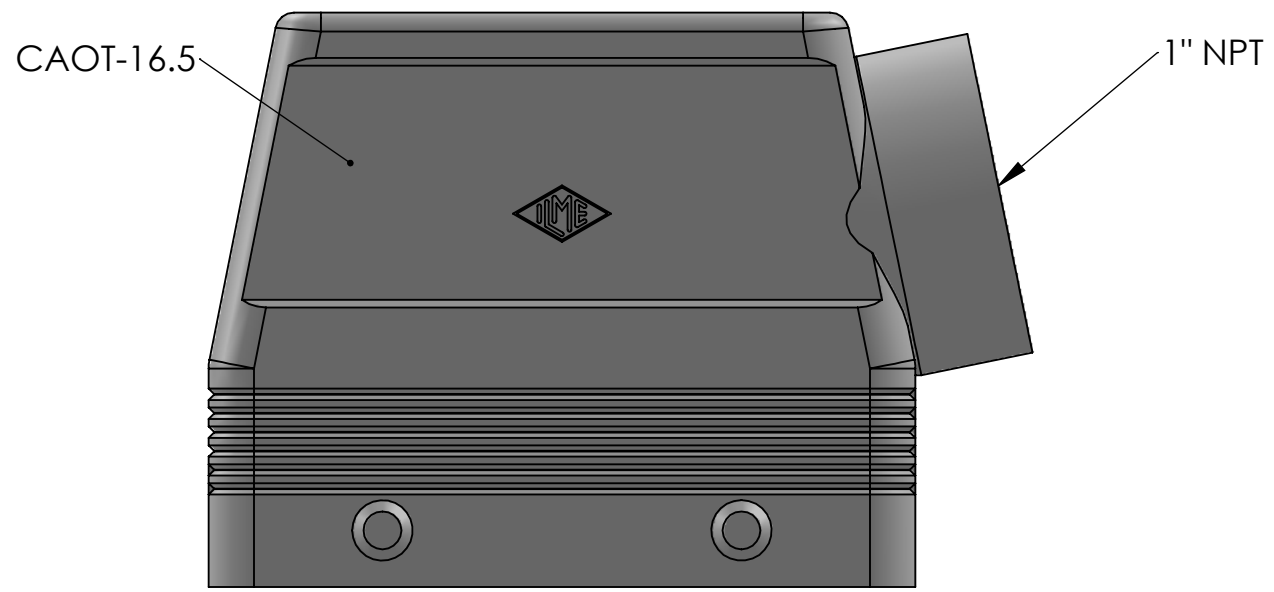

The Enclosures ensure IP66 protection rating when mated and locked with the closing levers.

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

Environmental Ratings:	
NEMA / UL:	4, 4X, 12
UNLESS OTHERWISE SPECIFIED:	
DIMENSIONS ARE IN INCHES AND [MM]	
MATERIAL	
FINISH	
DO NOT SCALE DRAWING	

		Certifications (under individual component part numbers)		
		US:	UL Recognized	
		Canada:	C-UL Recognized	
		Europe:	CE	
		China:	CCC	
MATERIALS				
BODY:		EPOXY COATED DIE CAST ALUMINUM		
GASKET:		THERMOPLASTIC ELASTOMER		
HANDLE:		POLYAMIDE		
LEVERS:		STAINLESS STEEL		
INSERTS:		GLASS REINFORCED THERMOPLASTIC		
CONTACTS:		SILVER PLATED COPPER ALLOY		
DRAWN BY	GO	MENCOM CORPORATION TITLE: 16 PL ILME KIT		
DRAWN DATE	10/24/2019			
CHECKED BY	ADM			
CHECK DATE	10/24/2019			
COMMENTS:		SIZE	DWG. NO.	REV
		B	TQDS-16IOA34	A
		SCALE: 1:2	WEIGHT:	SHEET 1 OF 1