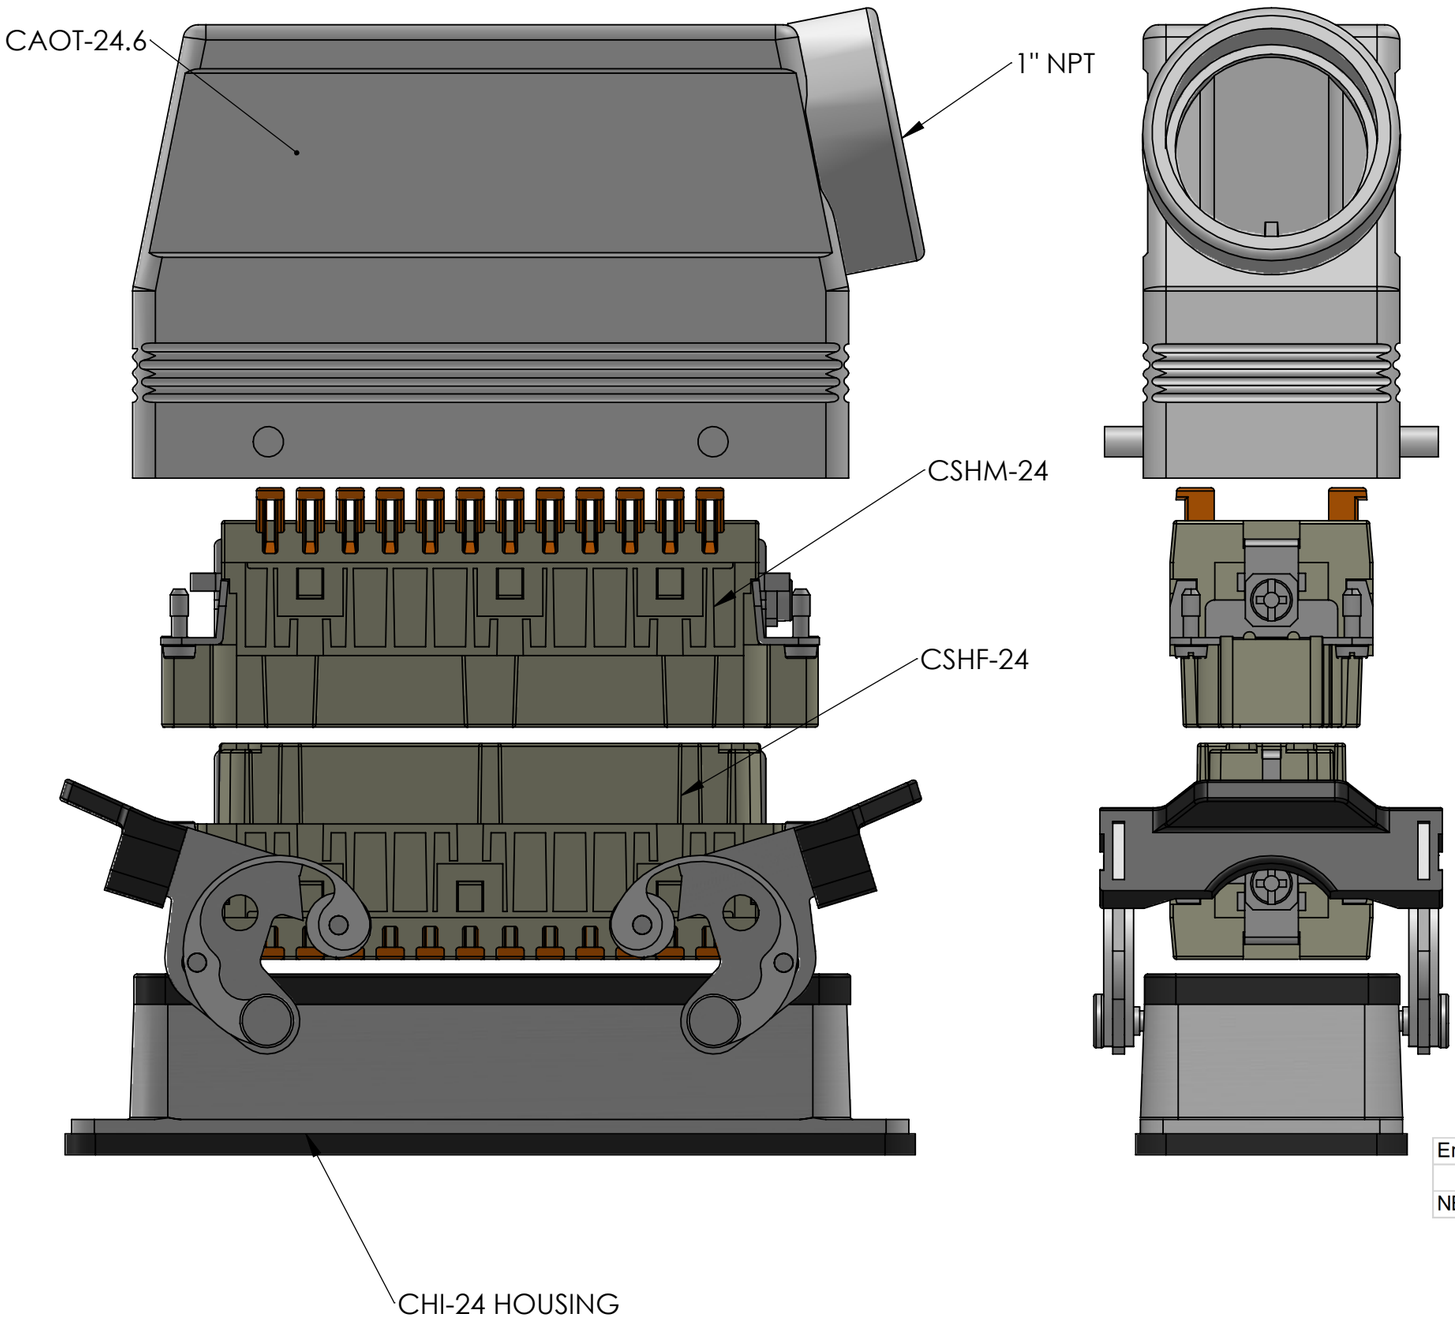


The Enclosures ensure IP66 protction raiting when mated and locked with the closing levers.

| Certifications | |
|---|---|
| (under individual component part numbers) | |
| | |
| US: | UL Recognized |
| Canada: | C-UL Recognized |
| Europe: | CE |
| China: | CCC |

| MATERIALS | |
|---|---|
| | |
| BODY: | EPOXY COATED DIE CAST ALUMINUM |
| GASKET: | THERMOPLASTIC ELASTOMER |
| HANDLE: | POLYAMIDE |
| LEVERS: | STAINLESS STEEL |
| INSERTS: | GLASS REINFORCED THERMOPLASTIC |
| CONTACTS: | SILVER PLATED COPPER ALLOY |

| Environmental Ratings: | |
|---|---|
| | |
| NEMA / UL: | 4, 4X, 12 |

**PROPRIETARY AND CONFIDENTIAL**
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES AND [MM]

MATERIAL

FINISH

DO NOT SCALE DRAWING

| | |
|---|---|
| DRAWN BY | GO |
| DRAWN DATE | 10/24/2019 |
| CHECKED BY | ADM |
| CHECK DATE | 10/25/2019 |

COMMENTS:

MENCOM CORPORATION

TITLE:

24 PL ILME KIT

| SIZE | DWG. NO. | REV |
|---|---|---|
| B | TQDS-24IOA10 | A |

SCALE: 1:2 | WEIGHT: | SHEET 1 OF 1