

RIA US



RIA US

## ATW07F

Tubular screw terminal block, centerline 14.5 mm / 0.551 inches, 2.0 mm / 0.079 inches raised base, horizontal wire entry

### Technical Data

RIA US V / A / AWG	300 / 65 / 14 - 6
Screw torque	max. 14.6 lbs.-in
Screw torque	max. 1.65 Nm
Wire strip length	10 mm / 0.394 in.
Pole size	1 to 12
Color	Natural


## ATW08G

Tubular screw terminal block, centerline 16.5 mm / 0.650 inches, 2.5 mm / 0.098 inches raised base, horizontal wire entry

### Technical Data

RIA US V / A / AWG	300 / 85 / 12 - 4
Screw torque	max. 17.7 lbs.-in
Screw torque	max. 2.0 Nm
Wire strip length	13 mm / 0.512 in.
Pole size	1 to 12
Color	Natural


Dimensions in mm 1 mm = 0.0394 in.

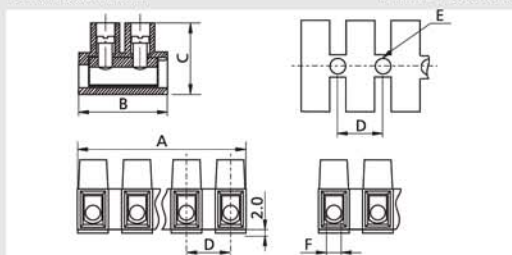

	A	B	C	D	E	F
mm	169.8	28.0	23.0	14.5	4.20	6.0±0.1
inches	6.69	1.10	0.91	0.57	0.17	0.24

L = (PS-1)14+15.8 mm

Dimensions in mm 1 mm = 0.0394 in.

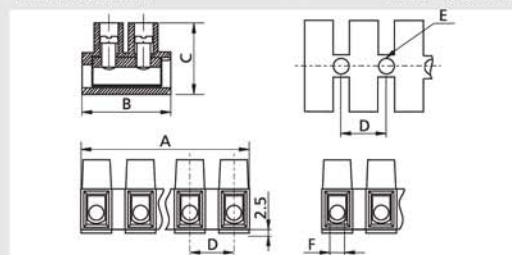

	A	B	C	D	E	F
mm	194.4	36.9	28.7	16.5	4.2	7.0±0.1
inches	7.65	1.45	1.13	0.65	0.17	0.28

L = (PS-1)16.5+12.9 mm

### Part numbers (P/N)

(information: page 165)

Complete the part number by adding the pole size.

#### ATW07F

centerline 14 mm / 0.551 inches

P/N ATW07F

<input type="checkbox"/>	01	02	03	04	05	06	07	08
<input type="checkbox"/>	09	10	11	12				

- Standard pole sizes
- Consult factory

### Part numbers (P/N)

(information: page 165)

Complete the part number by adding the pole size.

#### ATW08G

centerline 16.5 mm / 0.650 inches

P/N ATW08G

<input type="checkbox"/>	01	02	03	04	05	06	07	08
<input type="checkbox"/>	09	10	11	12				

- Standard pole sizes
- Consult factory