

ATW03F

Tubular screw terminal block, centerline 14 mm / 0.551 inches, 1.2 mm / 0.047 inches raised base, horizontal wire entry

Technical Data

V / A / AWG	300 / 50 / 20 - 8
Screw torque	max. 12 lbs.-in
Screw torque	max. 1.35 Nm
Wire strip length	9 mm / 0.354 in.
Pole size	1 to 12
Color	Natural

ATW04F


Tubular screw terminal block, centerline 14 mm / 0.551 inches, 1.2 mm / 0.047 inches raised base, horizontal wire entry, wire protector

Technical Data

V / A / AWG	300 / 50 / 20 - 8
Screw torque	max. 12 lbs.-in
Screw torque	max. 1.35 Nm
Wire strip length	9 mm / 0.354 in.
Pole size	1 to 12
Color	Natural

A

Dimensions in mm 1 mm = 0.0394 in.

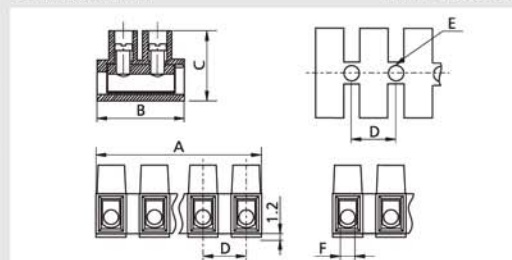

	A	B	C	D	E	F
mm	158.0	25.6	25.2	14.0	4.4	4.8±0.1
inches	6.220	1.008	0.992	0.551	0.173	0.189

L = (PS-1)14+4 mm

Part numbers (P/N)

(information: page 165)

Complete the part number by adding the pole size.


ATW03F

centerline 14 mm / 0.551 inches

P/N ATW03F	<input type="checkbox"/>	01	02	03	04	05	06	07	08
		09	10	11	12				

- Standard pole sizes
- Consult factory

Dimensions in mm 1 mm = 0.0394 in.

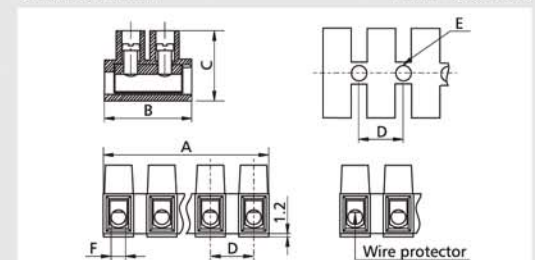

	A	B	C	D	E	F
mm	158.0	25.6	25.2	14.0	4.4	4.8±0.1
inches	6.220	1.008	0.992	0.551	0.173	0.189

L = (PS-1)14+4 mm

Part numbers (P/N)

(information: page 165)

Complete the part number by adding the pole size.

ATW04F

centerline 14 mm / 0.551 inches

P/N ATW04F	<input type="checkbox"/>	01	02	03	04	05	06	07	08
		09	10	11	12				

- Standard pole sizes
- Consult factory