

ATW03D

Tubular screw terminal block, centerline 8 mm / 0.315 inches, 1.2 mm / 0.047 inches raised base, horizontal wire entry

Technical Data

	V / A / AWG	300 / 20 / 22 - 12
	V / A / AWG Screw torque	400 / 10 / 20 - 18 max. 3.5 lbs.-in
	1.5 mm ² Screw torque	400 V / 17.5 A max. 0.4 Nm
	Wire strip length	5.3 mm / 0.209 in.
	Pole size	1 to 12
	Color	Natural

ATW04D


Tubular screw terminal block, centerline 8 mm / 0.315 inches, 1.2 mm / 0.047 inches raised base, horizontal wire entry, wire protector

Technical Data

	V / A / AWG	300 / 20 / 22 - 12
	V / A / AWG Screw torque	400 / 10 / 20 - 18 max. 3.5 lbs.-in
	1.5 mm ² Screw torque	400 V / 17.5 A max. 0.4 Nm
	Wire strip length	5.3 mm / 0.209 in.
	Pole size	1 to 12
	Color	Natural

Dimensions in mm

1 mm = 0.0394 in.

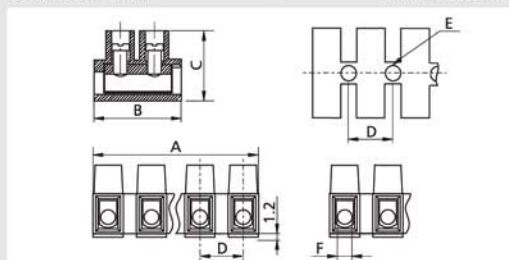


	A	B	C	D	E	F
mm	96.2	17.0	14.5	8.0	2.9	2.8±0.1
inches	3.787	0.669	0.570	0.315	0.114	0.110

L = (PS-1)8+8.2 mm

Dimensions in mm

1 mm = 0.0394 in.

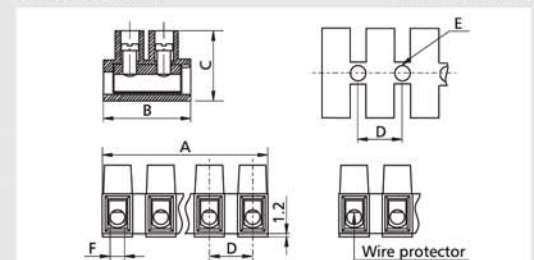

	A	B	C	D	E	F
mm	96.2	17.0	14.5	8.0	2.9	2.8±0.1
inches	3.787	0.669	0.570	0.315	0.114	0.110

L = (PS-1)8+8.2 mm

Part numbers (P/N)

(information: page 165)

Complete the part number by adding the pole size.

ATW03D

centerline 8 mm / 0.315 inches

P/N ATW03D

	01	02	03	04	05	06	07	08
	09	10	11	12				

- Standard pole sizes
- Consult factory

Part numbers (P/N)

(information: page 165)

Complete the part number by adding the pole size.

ATW04D

centerline 8 mm / 0.315 inches

P/N ATW04D

	01	02	03	04	05	06	07	08
	09	10	11	12				

- Standard pole sizes
- Consult factory