
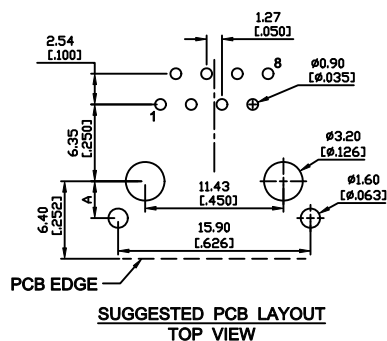








Electrical Characteristics :
Insulation Resistance : 500MΩ Min.
Contact Resistance : 50mΩ Max.
Withstand Voltage : 1000 VAC 1 minute.
Current Rating : 1.5A

Material:
Housing: Thermoplastic UL 94V-0
Contact : Selective Gold Plating
Terminal: 0.35mm Thickness Phosphor Bronze
Plated With Gold And Tin In Solder Area.
CUL File No : E215573

	Zul Abw./Tolerances		Oberfläche/Surface	Maßstab/Scale 1:1	Gewicht/Weight
				Werkstoff/Raw Material.	Werkstoff-Art.-Nr./Material No.
		Datum/Date	Name	Benennung/Title	
	Bearb.: Drawn	29.2.16	Step.	AJT93B 8P/8C, 30p"AU	
	Gepr.: Checked	29.2.16	MG		
	Norm				
	Std.				
				Zeichnungsnummer/Drawing No.	
				AJT93B8813	
				Blatt/Sheet 1	
				1 Bl. Sheets	
Zust. Rev.	Änderung/Modification	Datum/Date	Name	CAD-Nr./File No.	Ers.d./Replace By
					Ers.f./Replace For