
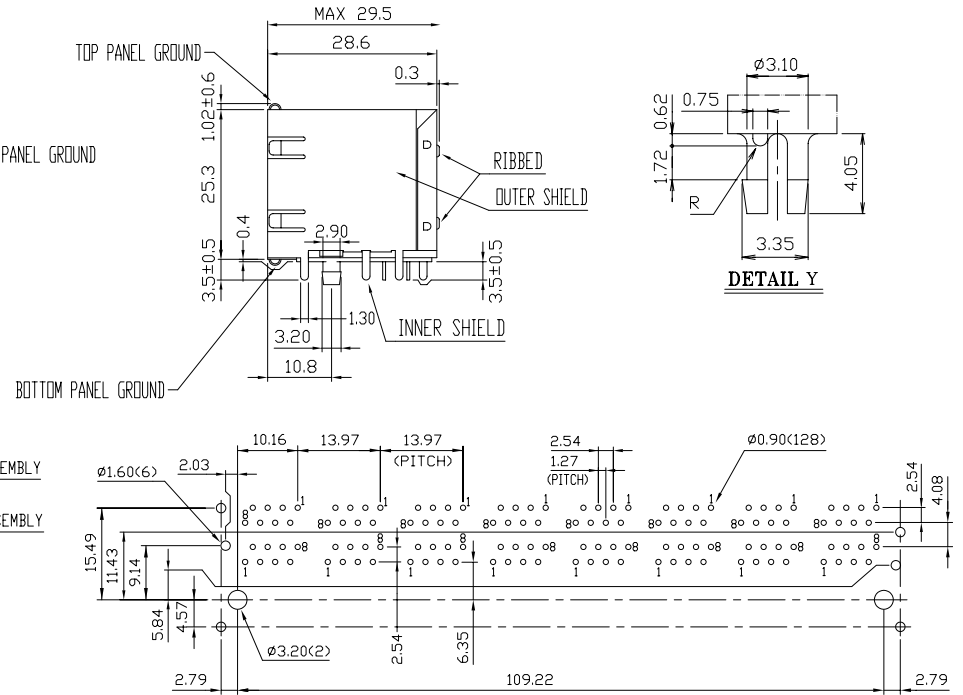


MATERIAL:
 • HOUSING-PBT POLYESTER UL-94V-0
 MIXED GLASS FIBER,
 STANDARD COLOR-BLACK
 • CONTACTS-0.35mm THICK PHOS-BRONZE
 PLATED WITH HARD GOLD AND
 GOLD FLASH IN SOLDER AREA.
 • SHIELD-0.25mm THICK COPPER ALLOY,
 PLATED WITH NICKEL.
 CAVITY CONFIRMS TO FCC RULES AND REGULATIONS
 PART 68,SUBPART F.

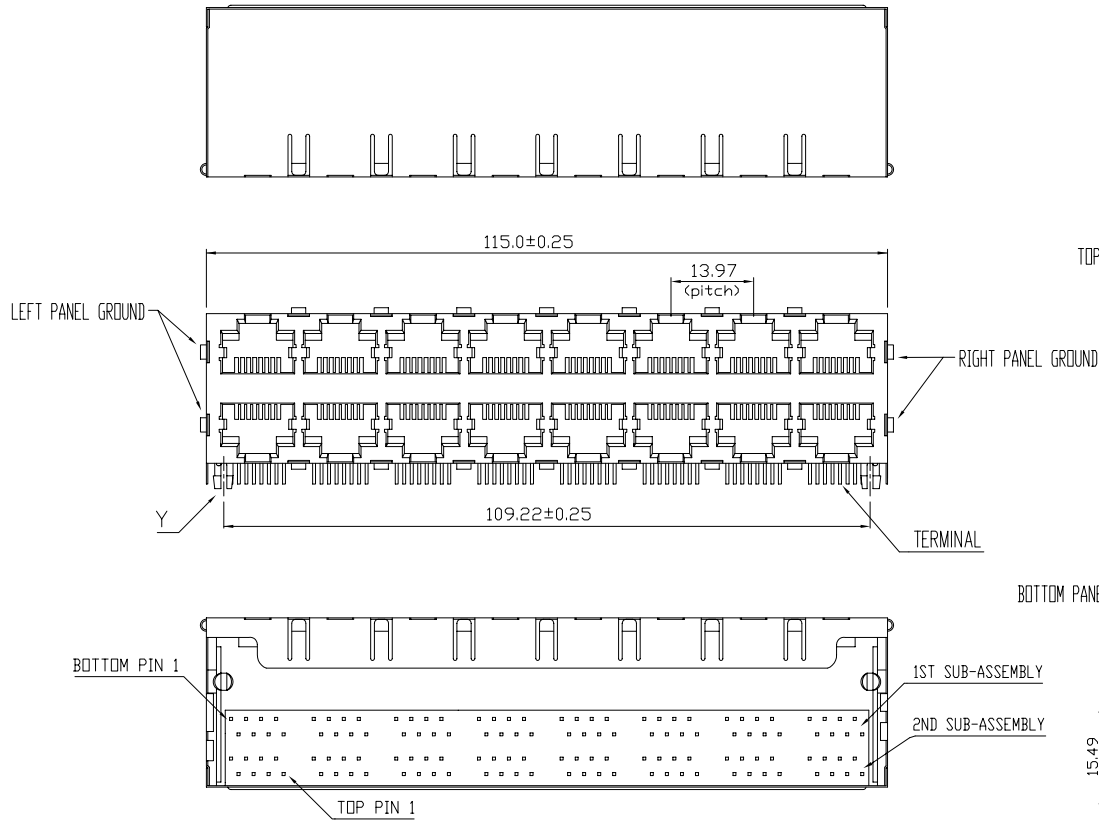

Ordering Information

AJT49D	8	8	G	X
Type	Positions	Contacts	Ports 16 (G)	Plating 1 = 6u" 3 = 30u"

Tolerance unless otherwise specified mm .0 ± .25 .00 ± .13 .000 ± .05
--

METZ CONNECT	P/N: AJT49D88GX
Desc.: Side entry, 2 X 8, shielded, thru hole modular jack	
Date: 2-8-10	Drawn By: Donna Mears
Dimensions in mm	Verified By: Mike Balekdjian