
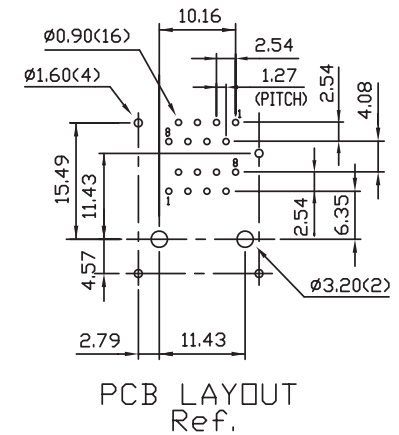
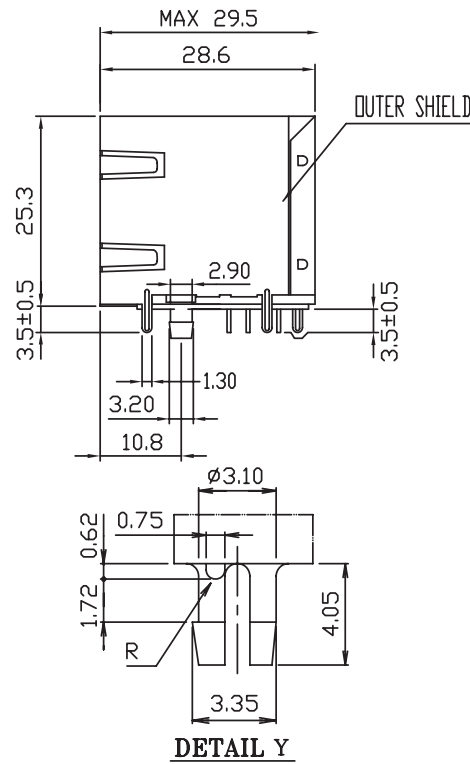
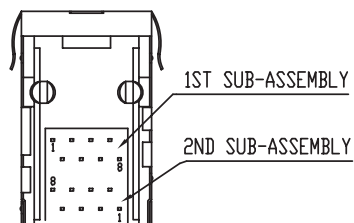


MATERIAL:

- HOUSING-PBT POLYESTER UL-94V-0
MIXED GLASS FIBER.
STANDARD COLOR-BLACK
- CONTACTS-0.35mm THICK PHOS-BRONZE
PLATED WITH HARD GOLD AND
GOLD FLASH IN SOLDER AREA.
- SHIELD-0.20mm THICK COPPER ALLOY,
PLATED WITH NICKEL.

CAVITY CONFIRMS TO FCC RULES AND REGULATIONS
PART 68,SUBPART F.

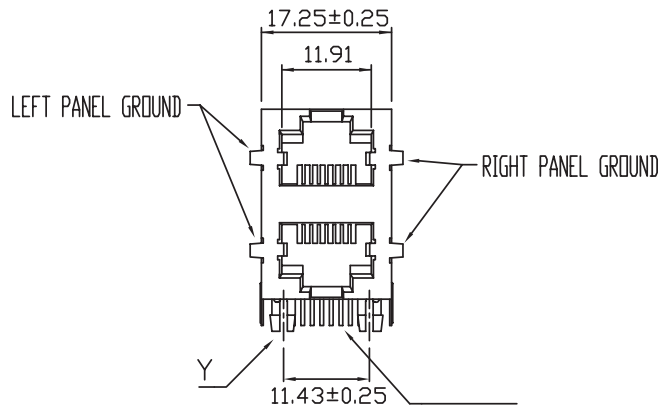

Ordering Information

AJT48D	8	8	2	X
Type	Positions	Contacts	Ports	Plating
				1 = 6u"
				3 = 30u"
				4 = 50u"

Tolerance unless otherwise specified
mm
.0 ± .25
.00 ± .13
.000 ± .05

METZ CONNECT	P/N: AJT48D882X
Desc.: Side entry, 2 X 1, shielded, thru hole modular jack	
Date: 7-21-16	
Dimensions in mm	